








# Drives and motors catalogue 2013

ABB drives and motors quickfinder

Select a drive or motor using the quick criteria below










Drives featurefinder - all the features in one table	4 - 5
An overview of the catalogue and ABB Authorized Value Providers	6 - 7
What's new in 2013	8 - 9
AC motors overview	61
European MEPS for low voltage motors	62
Useful engineering information and how to select an AC drive	87 - 88

Supply voltage								Motor power kW	IP rating	Drive family	Drive type	Brief description	Why choose this product?		Pages
110-120V 1ph	200-240V 1ph	208-240V 3ph	380-480V 3ph	380-415V 3ph	500V 3ph	690V 3ph		0.18 to 0.37 (ACS55) 0.18 - 2.2 (ACS55) 0.37 - 2.2 (ACS150) 0.37 - 2.2 (ACS150) 0.37 - 4.0 (ACS150)	IP20 (ACS55)  IP20 (ACS150) NEMA 1 (ACS150)	ABB micro drives	ACS55 and ACS150	ACS55 - Simplest variable-speed controller. No programming – set-up via DIP switches – ACS150 - Greater capability than ACS55 with simple keypad and built-in potentiometer. Simple parameter set that includes PID control. For OEMs and machine builders.	ACS55 - Allows users of direct-on-line (DOL) starting methods to swap to variable-speed control. ACS150 - More capable parameter set allows many applications to be tackled including PID. Built-in keypad and programming in the box. Unified height and depth for easy cabinet layout.		10 - 14
								0.37 - 2.2 0.37 - 11.0 0.37 - 22.0	IP20 NEMA 1 IP66/69k	ABB machinery drives	ACS355	Machinery controller with safe torque-off to SIL3/PL e capable parameter set - includes eight-step sequencer. For OEMs and machine builders, especially F&B industry.	Designed for machinery applications, with assistant keypad and real-time clock. Feedback devices and fieldbus available. IP66 drives meet hygiene standards for food & beverage industry		15 - 18
								0.37 - 2.2 0.37 - 11.0 0.37 - 22.0	IP20 NEMA 1	ABB general purpose drives for fans and pumps	ACS310	Dedicated drive for fans and pumps, with quadratic motor fluxing and energy optimisers to optimise fan and pump loads. For fan and pump OEMs and water & wastewater applications.	Assistant or simple keypad – dedicated pump features. Pump protection, cleaning and pipe fill features. Energy saving counters, fan PID controllers with "sleep" functionality.		19 - 22
								0.75 - 75 1.1 - 180 200 - 355	IP21, 54 IP21, 54 IP20	ABB general purpose drives (for general industry)	ACS550	Drive equipped with EMC and harmonic filters. The extensive parameter set, vector control and high power density, allows the drive to fit most standard variable-speed drive applications.	Assistant keypad makes it user-friendly - numerous standard software functions and macros. Real-time clock. Energy monitoring and energy optimising with everything inside.		23, 24 27, 28
								0.75 - 75 1.1 - 180 200 - 355	IP21, 54 IP21, 54 IP20	ABB HVAC drives (for the HVAC industry)	ACH550	Dedicated industry drive for HVAC applications. Industry specific HVAC functionality, such as fireman's override are included as well as HVAC set-up macros and HVAC keypad controls. BACnet is also embedded as standard in the drive as a BMS communications protocol.	Familiar HVAC assistant keypad matches industry expectations. Dedicated HVAC functionality and HVAC harmonic specifications make it ideal for the industry. Everything inside concept makes it easy to install and Energy monitoring counters allows energy usage to be passed back over the BACnet link.		25 - 28
								1.1 - 160  200 - 400	IP20  IP00	ABB industry-specific drives for water and wastewater	ACQ810	Dedicated industry drive for water and wastewater using DTC motor control to optimise control and energy use. Safe torque-off to SIL3 means no contactors.	Expert control of pumping applications. Multi-pump and multi-master control. Automatic duty standby and pump cleaning and level control built-in. Drives also measure flow for built-in leak detection.		29 - 32
								0.55 - 55 1.1 - 160 1.5 - 200 5.5 - 160	IP20,21,55	ABB industrial drives - wall-mounted unit 01 - 6/12-pulse diode 11 - active 4Q regenerative 31 - active low harmonic	ACS800 - 01/11/31	Drives are order based expert drives for highly demanding industrial applications. DTC motor control ensures peak performance. Wall-mounted variants are available, with differing rectifier technologies and built-in options.	Standard rectifier, low harmonic or full regeneration can be chosen, then select from a wide range of I/O and feedback options. To complete the selection, drives can be ordered with pre-loaded industry specific software versions which allow quick integration onto winders, cranes, hoists and windmills. Suitable certification also available.		33, 34 35, 39 40
								0.37 - 200 90 - 1450 110 - 1850 90 - 1900	IP00, 21	ABB industrial drives - module 02 - floor standing 04 - module for cabinets 14 - active low harmonic kits	ACS800 - 02/04/14	Modules are drives that are optimised for cabinet installation by system integrators. The routing of cables from top in to bottom out, and the position of options and DC feeding have all been considered for optimal cost effective cabinet integration.	Modules are fully supported with CAD databases, EPLAN libraries, with Rittal and generic kits and parts for quick cabinet installation.		33, 36
								45 - 1450 55 - 1850 45 - 2800	IP21, 22, 42, 54, 54R	ABB industrial drives - cabinet-built 07 - 6-pulse diode 17 - active 4Q regenerative 37 - active low harmonic	ACS800 - 07/17/37	Cabinet drives are designed, built and tested at the factory and can be ordered with a large range of standard options. Door furniture, motor protection and various cooling variants are possible.	Cabinets are fully tested and certified EMC with thermal solutions. Extensive options available.		33, 37 39, 40
								1.1 - 5600	Various	Other ABB industrial drives variants	ACS800 - the rest of the family	The ABB drive family contains liquid-cooled modules, multidrives and multidrive modules and many more.			41 - 42
								0.55 - 7.5 0.55 - 250 0.55 - 250 4 - 250	IP21, IP55	ABB next generation industrial drives - wall-mounted 01 - 6-pulse diode	ACS880 - 01	Next generation version of the popular ACS800 range. New keypad, PC tools and innovations in usability and hardware design. New PC tools and enhanced motor control complete the package.	Order based drives built to order in the factory. The ACS880 is the next generation Industrial drive. ACS800 is still available as the ACS880 only brings some of the variants available with the ACS800.		44 - 47
								45 - 250 45 - 250	IP21, 42, 54	ABB next generation industrial drives - cabinet drive 07 - 6/12-pulse diode	ACS880 - 07	Next generation of the ABB industrial drives cabinet drive. Cabinet drives are designed, built and tested at the factory and can be ordered with a large range of standard options. Door furniture, motor protection and various cooling variants are possible.			44, 45 48, 49
								0.55 - 250	Various	ABB next generation Industrial drives	ACS880	Other variants of this new family.			50 - 53
Medium voltage AC drives								315 - 35 MW 2 MW - 72 MW	Various	ABB medium voltage AC drives	ACS1000 - ACS6000 LCI megadrive	ABB is able to provide medium voltage drives and motors to suite many applications and industry requirements. Air-cooled and water-cooled variants available, as well as integrated transformer solutions. Standard solutions up to 35 MW with modular power sections for lower mean time to repair (MTTR). LCI megadrives take the power offering to 72 MW			54 - 55
Low voltage DC drives and power quality filters								25 A - 5.2 kA	Various	DC drives and power quality filters	DCS400 - DCS600, PQF	ABB provides DC drive and motor packages via its dedicated DC partners. ABB also provides power quality solutions to ensure that drive installations comply to the rigours of G5/4 and G5/5.			55 - 56
												Remote monitoring options and PC tools for drive commissioning and energy calculations.			57 - 59
												Drive life cycle services - and ABB University training centre.			60

	Motor power kW	IP rating	Motor family	Motor type		
A wide range of motors available	0.25 kW - 1000 kW	IP55/56/65	ABB general performance motors ABB process performance motors ABB hazardous area motors - flameproof ABB hazardous area motors - non sparking NEMA motors	M2AA, M2BA M3AA, M3BP M3JP/KP M3GP NEMA standard	    	61 - 84

ABB drives featurefinder

The table highlights the differences between the various ABB drives families. It also lists some of the key features of the different ABB drives. However, the table is not exhaustive and if you are seeking a feature which does not appear in the table, please contact ABB for clarification.

										
Drive range		ABB micro drives (ACS55 - p10) (ACS150 - p12)	ABB machinery drives (ACS355 - p15)	ABB general purpose drives for fans and pumps (ACS310 - p19)	ABB general purpose drives (ACS550 - p23)	ABB HVAC drives (ACH550 - p25)	ABB industrial drives for water and wastewater (ACQ810-04 - p29)	ABB industrial drives and drive modules (ACS800-01,-02,-04,-11,-14,-31 - p36)	ABB industrial drives cabinet-drive (ACS800-07, 17, -37 - p37)	ACS880 (ACS880-01, 07 - p44)
Voltage & power	Details or additional notes	(ACS55) 1-ph 100 - 120 V: 0.18 - 0.37 kW 1-ph 200 - 240 V: 0.18 - 2.2 kW (ACS150) 3ph 380 - 480 V, 0.37 - 4.0 kW	1-ph 200 - 240 V: 0.37 - 2.2 kW 3-ph 200 - 240 V: 0.37 - 11 kW 3-ph 380 - 480 V: 0.37 - 22 kW	1-ph 200 - 240 V: 0.37 - 2.2 kW 3-ph 200 - 240 V: 0.37 - 11 kW 3-ph 380 - 480 V: 0.37 - 22 kW	3-ph 208 - 240 V: 0.75 - 75 kW 3-ph 380 - 480 V: 1.1 - 355 kW	3-ph 208 - 240 V: 0.75 - 75 kW 3-ph 380 - 480 V: 1.1 - 355 kW	3ph 380 - 480 V: 1.1 - 400 kW	3-ph 230 V: 0.55 - 200 kW 3-ph 400 V: 1.1 - 1450 kW 3-ph 500 V: 1.5 - 1850 kW 3-ph 690 V: 5.5 - 1900 kW	- 3-ph 400 V: 45 - 1450 kW 3-ph 500 V: 55 - 1850 kW 3-ph 690 V: 45 - 2800 kW	3-ph 230 V: 0.55 - 7.5 kW 3-ph 400 V: 0.55 - 250 kW 3-ph 500 V: 0.55 - 250 kW 3-ph 690 V: 4 - 250 kW
Other rectifier options (assume 6-pulse as standard)	12-pulse diode Low harmonics regenerative (4Q) Low harmonics non-regenerative (2Q) Common DC link connectability	- - - -	- - - ●	- - - -	- - - -	- - - -	- - - -	○ (>400 kW) ● (800-11, 800-14) ● (800-31)	○ (>400 kW) ● (800-17) ● (800-37)	- - - ●
EMC compliance (EN 61800-3, 2004)	No EMC filter 2nd unrestricted (C3) 1st restricted (C2) 1st unrestricted (C1)	● (or remove EMC screen) ● ■ (ACS150) ●,- (ACS150)	● (remove EMC screw) ● ■ -	● (remove EMC screen) ● ■ -	● (remove EMC screw) ● ● ■	● (remove EMC screw) ● ● ■	○ ● ○ -	● (remove EMC screw) ● ○, ■ (800-04 R7/8) -	● (remove EMC screw) ● ○ -	● (remove EMC screw) ● ○ -
Harmonic filter / choke / active (EN 61000-3-4)	Choke (AC or DC) Swinging choke (better harmonic performance) Low harmonic (best performance)	■ - -	■ - -	■ - -	- ● -	- ● -	●, ■ (A,B Frame) - -	● - ● (800-31)	● - ● (800-37)	● - -
Enclosure class	IP00 IP20 IP21 (or near equivalent) IP22 IP42 IP54/ IP54R/ IP55 IP66/69K	- ● ○ (Nema 1, ACS150) - - - -	- ● ○ (Nema 1) - - - ●	- ● ○ (Nema 1) - - - -	- - - ● ○ (IP54)	- - - ● ○ (IP54)	● (G frame) ● (A-E frame) ● (G1/G2 frame) - - -	● (800-04, R7/R8, 800-14) ● (800-04, R2 - R6) ● (800-01, -02, -11, -31) - ○ (800 -01, -11, -31) IP55	- - ● ○ ○ -	- - - ● ○ -
Mechanical construction	Module - panel mountable (IP20 minimum) Wall-mounted (IP21 or equiv. minimum) Free-standing, floor-standing Cabinet built by ABB	●* (DIN mount + screw) ○ (Nema 1, ACS150) - -	●* (DIN mount + screw) ○ (Nema 1 kit) - -	●* (DIN mount + screw) ○ (Nema 1 kit) - -	● ● ● (550-02) -	● ● ● (550-02) -	● - - -	● (800-04*) ● ● (800-02) -	- - ● ●	- ● (-01) - ● (-07)
Cooling method	Direct air-cooling Water-cooling Through panel/flange mount	● - -	● - -	● - -	● - ○ (IP54 drive)	● - ○ (IP54 drive)	● - -	● - ○ (800-04)	● ● (LC range) -	● - -
Dynamic braking chopper	Range of resistors available from ABB	- (ACS55), ● (ACS150)	●	-	● (to 11.0 kW), ■ thereafter	● (to 11.0 kW), ■ thereafter	-	○	○	○
Switching frequency		4 to 16 kHz	4 to 12 kHz	4 to 16 kHz	4 to 12 kHz	4 to 12 kHz	DTC	DTC	DTC	DTC
Motor control	DTC (open/closed loop) Sensorless vector Scalar, VVVF	- - ●	- ● ●	- - ●	- ● ●	- ● ●	● - -	● - -	● - -	● - -
Programmability	Parameter programming Adaptable programming IEC61131 programmability	uses dip (ACS55), ● (ACS150) - -	● (sequencer) - -	● - -	● - -	● - -	● ● ●	● ● (Drive AP) -	● ● (Drive AP) -	● future future
Start-up assistance and help	Aids to commissioning and diagnostics	-	● (assistant panel)	● (assistant panel)	● (assistant panel)	● (assistant panel)	●	●	●	●
Cold configure	Program the drive whilst still in its box	●	●	●	●	●	-	-	-	-
Removable memory module	No recommissioning time needed	-	-	-	-	-	●	-	-	●
Real-time clock	With assistant control panel	-	●	●	●	●	-	-	-	●
I/O built-in	Analogue input/output Digital input/output Speed feedback (encoder) ( ) = via add on expansion module Motor thermal protection STO (safe torque-off)	1 / 0 3 / 1r (ACS55), 5 / 1r (ACS150) - - -	2 / 1 5 / 1r+1t+(3r) ○ ○ configurable ●	2 / 1 5 / 1r+1t+(3r) - ○ configurable -	2 / 2 6 / 3r+(3r) ○ ○ configurable -	2 / 2 6 / 3r+(3r) ○ ○ configurable -	2+(3) / 2+(1) 6+2c+(4) / 2r+(2r) - ○ configurable ●	3+(2) / 2+(2) 7+(6) / 3+(6r) ○ ○ configurable ○	3+(2) / 2+(2) 7+(6) / 3+(6r) ○ ○ configurable ○	2+(3) / 2+(1) 7+(4) / 3r+(2r) ○ ○ configurable ●
+24V live control panel + comms	External 24V supply can be connected	-	● (MPOW)	-	-	-	●	●	●	●
Fieldbuses	Modbus Fieldbus interface (popular networks) Drive-to-drive link BACnet	- - - -	○ ○ - -	● - - -	● ○ - -	● ○ - ●	● ○ ○ ●	○ ○ ○ -	○ ○ ○ -	● ○ ● -
Remote monitoring	Report info and status remotely	-	■ (SREA)	■ (SREA)	■ (SREA)	■ (SREA)	■ (SREA)	■ (RETA)	■ (RETA)	■ (RETA or SREA))
Safety options (TÜV certified hardware)	Emergency stop (CAT.0, CAT.1) Safe torque-off (SIL2/PL d) Safe torque-off (SIL3/PL e)	- - -	- - ●	- - -	- - -	- - -	- - ●	- ■ -	○ ○ -	○ ○ ●
ATEX	ATEX certified for use with ABB motors	-	● Ex tD and DIP only	-	● Ex nA, Ex d/de,Ex tD/DIP only	-	-	●	●	-
PC tools	DriveConfig tool (programme in box) DriveWindow Light DriveWindow DriveAP DriveStudio (IEC 61131) Drive Composer (Entry or Pro)	■ (ACS55), - (ACS150) - - - - -	- ■ - - - -	- ■ - - - -	- ■ - - - -	- ■ - - - -	- - - - ■ -	- ■ (NPCU req.) ■ (RDCO req.) ■ (RDCO req.) - -	- ■ (NPCU req.) ■ (RDCO req.) ■ (RDCO req.) - -	- - - - - ■
Industry specific products	HVAC specific Food and beverage Machinery / OEM Water and wastewater Industry specific applications FW	- ○ ● - -	- ● ● ○ ● (IP66/69) F&B	- ○ ● ○ ●	- ○ - - -	● ○ ○ - ●	- - - ● ●	- ○ ○ ○ xx ○	- ○ ○ ○ xx ○	- - - - -

● = standard  
○ = option, internal or fitted  
■ = option, external  
- = not available

\* = can be bookcase or flat mounted  
r = relay output, t= transistor output,  
c = configurable to be input or output,

All ABB drives are CE marked  
Other global approvals such as UL, cUL, CSA,  
C-Tick, GOST-R also applicable

xx = ACS800 can be loaded with industry specific code,  
like crane, winder, winch, spinning etc

++ = A wide range of encoder interfaces  
to suit high performance applications

4 ABB drives featurefinder | ABB drives and motors catalogue 2013

ABB drives featurefinder | ABB drives and motors catalogue 2013 5



# ABB drives and motors

Welcome to the 2013 edition of the ABB drives and motors catalogue. Here you will find the basic technical details and prices for our most commonly purchased drives and motors, together with their most widely selected options. However, our range of products, systems and services is far more extensive. Extracts from this additional range are given on pages 42-60.

Please do not hesitate to call us for any further information. Our contact details are on the back cover.

Thank you.

## ABB drives and ABB motors - a matched combination

ABB is one of the few companies in the world to make low voltage AC drives and motors. As such ABB is able to offer the perfectly designed, tested and approved motor-drive combination for any demanding process.

ABB's AC drives are able to control ABB's AC motors over a power range from 100 W to 100 MW. ABB offers the lowest life cycle cost for each motor and drive, generating higher productivity, higher operating efficiency and minimal environmental impact.



# ABB Authorized Value Providers

The members of the ABB Value Provider Program deliver an authorized offering of sales, support, service and engineering in seamless cooperation with ABB. They bring ABB's products and services straight to your front door.

Authorized  
value  
provider



## Drives Authorized Value Providers

These are the foremost drives network for the UK and Ireland. The 12 companies are strategically located around the UK and Ireland and have one of the largest stocks of AC drives, from 0.18 kW to 400 kW, available off-the-shelf.


Each AVP is able to access up-to-the-minute central stock information using ABB's online service. The members of the team have been handpicked by ABB to offer outstanding expertise in their local area.

## Motors Authorized Value Providers

These are a network of 14 independent companies that have pooled their resources to offer national and local customer access to electric motors up to 500 kW. The AVPs offer extensive technical knowledge and back-up, combined with the best equipped repair and maintenance facilities in Europe. With AVPs users benefit from common service standards throughout the UK, common pricing, access to ABB's motor design and technical support, along with standardised reporting functions.

### Drives Authorized Value Providers

1. ACS Drives & Control Systems Limited, Ireland  
Tel: +353 (0)44 934 0242
2. Advantage Control, Northern Ireland  
Tel: 02844 613 782
3. APDS Ltd, South West  
Tel: 0117 982 2049
4. Central Electrical, Merseyside  
Tel: 0151 546 6000
5. EDC (Scotland) Ltd, Scotland  
Tel: 0141 812 3222
6. Gibbons Engineering Group Ltd, East Anglia  
Tel: 01621 868 138
7. Halcyon Drives, Yorkshire and Greater Manchester  
Tel: 0113 236 1509
8. iDrives, South East  
Tel: 01483 766 555
9. Inverter Drive Systems, East Midlands  
Tel: 0115 944 1036
10. MKE Drive Systems, South East  
Tel: 01795 438 436
11. Quantum Controls, North East  
Tel: 01661 835 566
12. Sentrige Control, Midlands  
Tel: 024 7655 3303

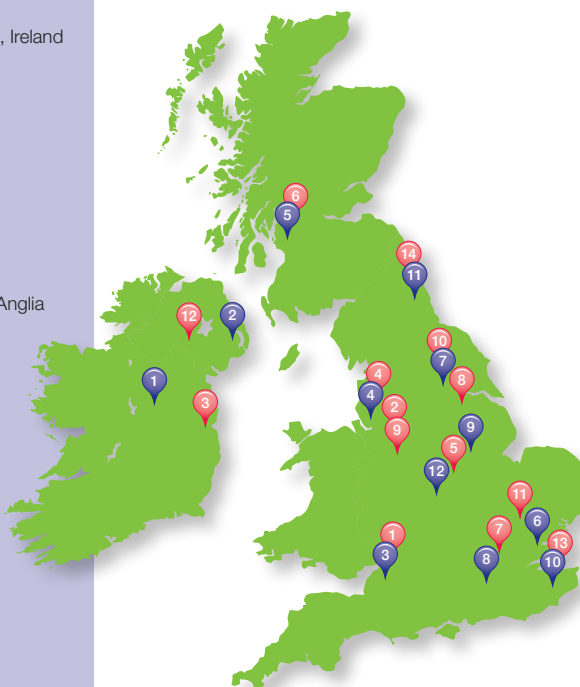

### Motors Authorized Value Providers

1. APDS Ltd, South West  
Tel: 0117 982 2049
2. Beta Power Engineering, Cheshire  
Tel: 0161 432 9995
3. Campbell Electric Motors Ltd, Ireland  
Tel: +353(0) 1 4628 333
4. Central Electrical, Merseyside  
Tel: 0151 546 6000
5. CovElec (Leics) Ltd, Leicestershire  
Tel: 0116 269 8111
6. EDC (Scotland) Ltd, Scotland  
Tel: 0141 812 3222
7. EMR Silverthorn Ltd, Middlesex  
Tel: 020 8903 6590
8. Francis Chambers & Co Ltd, South Yorkshire  
Tel: 01709 522 175
9. H.G. Rewinds Ltd, Staffordshire  
Tel: 01782 262525
10. Halcyon, West Yorkshire  
Tel: 0113 236 1509
11. Heasell Electromechanical Services Ltd, Hertfordshire  
Tel: 0871 222 7896
12. JJ Loughran, Northern Ireland  
Tel: 028 8676 2295
13. MKE Engineering, Kent  
Tel: 01795 438 436
14. Quantum Controls, North East  
Tel: 01661 835 566

# What's new in 2013?

## Next generation ABB industrial drives, ACS880

Available initially from 0.55 to 250 kW at 208 to 690 V, the drive range is designed to tackle any challenge in any motor-driven application across any industry.



The range is the first low voltage AC drive to use ABB's new common architecture that features the same control panel, harmonised parameters and functions, universal accessories and engineering tools. The architecture brings faster commissioning, minimal operator training and a familiarity across all ABB drives to be launched in the future.

The ACS880 family can be obtained as a cabinet solution up to 250 kW, with many factory approved factory fitted options.



## Control panel supports easiest commissioning yet

ABB's new high contrast, high resolution control panel is clearly visible in all conditions and features a flashing backlight for warning/fault, output-views, signals and progress views, helping the user to identify and analyse variations and faults in the process. The control panel's menus and messages can be customised to use terminology appropriate to the application. The panel's text editor lets the user add information and customise text, such as I/O labelling, fault names and contact information for service.



## Accurate control of any motor type

Induction motors, synchronous motors and induction servo motors are all supported as standard by the drive, without any additional software. The latest revolutionary SynRM (synchronous reluctance motor) is also supported by the ACS880 platform.

The next generation ABB industrial drive will control motors in either open-loop or closed-loop, through its high precision motor control platform, direct torque control (DTC). Since its launch in 1996, ABB has actively developed DTC to maximise productivity with highly accurate motor control.

## Robust and safe

The drive's robust design makes it suitable for many types of challenging industrial environments with an IP21 enclosure as standard. It is also offered with an optional IP55 rating with the same physical footprint.



The drive offers integrated safety features, reducing the need for external safety components. Safe torque-off (STO) comes as standard, while options such as safe brake control (SBC), safe stop 1 (SS1), safe stop emergency (SSE) and safe maximum speed (SMS) are available when the dedicated safety module is installed.



## Programming support

The new ABB industrial drives support the CoDeSys programming environment, the same software used for ABB's PLC, the AC500. This commonality allows easy integration of the drive and the AC500 PLC, since the control logic of the application can be designed using the same software, while some control logic can even be transferred from the PLC to the drive.

## Fieldbus support

The ABB industrial drive can interface with the most widely used fieldbus protocols on the market and offers remote monitoring solutions.



## Applications

Among the challenging applications suited to this drive are compressors, conveyors, cranes, winches, mixers, pumps, fans, winders and extruders. The ABB industrial drive is suitable for many industries including marine, mining, cement, oil and gas, metals, chemical, material handling and pulp & paper.

Built-to-order to meet customers' needs, the ABB industrial drive can tackle any technical challenge through its array of options that can include a wide selection of fieldbuses, EMC filters, resolvers, encoders, du/dt filters, sine wave filters, chokes and brake resistors, as well as application-specific software.

# What's new in 2013?

## MV drives increase power range and topologies

The medium voltage (MV) drives range available from ABB has extended its power range up to 35 MW. ABB has added active rectifier technology and offshore (marine) cabinet configurations to the already extensive range. For further information please refer to pages 54 and 55.

## ABB industry-specific drive for water and wastewater, ACQ810

The ACQ810 modules, which are designed and manufactured for MCC integrators, has a new addition to the power range. The "G" frame replaces the higher powered module and extends the power rating up to 500 kW at 500 V. The module is mounted on wheels for easy manual handling. Input cables come in at the top and motor output connects to the bottom. These areas are shrouded and the shrouds remain in place when the module is removed for maintenance. This module makes it easier for MCC integrators to incorporate large powers into their cabinets for water and wastewater clients.



## AC500 safety PLC

AC500-S is the new safety PLC that fulfils the highest safety requirements and standards. The PLC is TÜV certified up to SIL3 (IEC 62061) and PL e (ISO13849). Separate safety and non-safety application programming provides flexibility and scalability for customised solutions by using the complete AC500 CPU range. ABB's new AC500-S safety PLC sets new standards in the field of safety engineering by bringing an incredibly powerful set of functions for trigonometric operations, including COS, SIN, TAN, ASIN, ACOS and LOG. Integrating AC500 with ACS880 and other safety hardware from Jokab Safety, allows ABB to offer a full safety solution.



## Synchronous reluctance motor and drive package

ABB's new, highly energy-efficient synchronous reluctance motor and drive package (SynRM) is an innovative motor design that has no rotor windings, unlike traditional synchronous designs. The rotor, therefore, suffers virtually no power losses and the rotor temperature remains lower than in conventional rotors, helping to achieve better power density and higher energy efficiency. The package includes a matched motor and drive with dedicated software. Optimised for variable-speed operation it offers smooth, efficient process control and optimal use of energy.

The SynRM package has a high output variant that produces the same power as traditional asynchronous AC motors but

in mechanical frames which are two sizes smaller. This high output variant also boasts IE3 efficiency figures. The high output motor is suitable for OEM and machine builders who have limited physical space.



The second high efficiency variant has the same physical dimensions as a standard asynchronous AC motor but is able to achieve IE4 efficiency, which is ideal for minimising energy usage in fan and pump applications. The SynRM package requires an ABB variable-speed drive to control the speed of the shaft. Depending on the required application, ABB can choose from a number of drives that can control the SynRM motor.

## BS EN 62061 - new Machinery Directive

ABB's approach features:

1. Built-in safe torque-off (STO) to SIL 3 within the ABB machinery drive range (ACS355, ACS850 and ACSM1); the ABB industrial drive range (ACS800); and the ABB industry-specific drive for water and wastewater (ACQ810).
  - STO can replace emergency stop contactors in traditional safety circuits, where power removal is not required
  - Other products within the ABB industrial drive range have STO certified to SIL2
2. For more demanding safety solutions, calculations and risk assessments, ABB has a dedicated safety company, that offer's a comprehensive consultancy service.
3. ABB drives, like the ACS880, also contain more complex integrated safety functionality.

## Energy monitoring built-in as standard

ABB has been committed to saving energy for decades. The company's Energy and Productivity Improvement Plan includes the first true energy appraisal.

To enhance the ability of ABB's products to save energy, the ABB standard drive and the ABB industrial drive are enhanced to include a built-in energy saving calculator:

- Drive calculates energy being saved compared to application being controlled DOL (direct-on-line)
- Energy being saved is displayed on keypad in local currency; in tonnes of CO<sub>2</sub> saved; and in kWh and MWh – an ideal feature for energy managers and energy efficient customers.
- ABB products are on the UK Government's Energy Technology List (ETL).



# ABB micro drive

## 0.18 kW to 2.2 kW, ACS55

Motor control method - scalar

200/240 V, 1-phase supply, 3-phase output, 0.18 kW - 2.2 kW

100/120 V, 1-phase supply, 3-phase output, 0.18 kW - 0.37 kW

### What is an ABB micro drive, ACS55?

The ABB micro drive meets the requirements of OEMs, machinery builders and panel builders. It is a component that is bought, together with other components, from a logistical distributor. The aim is for the ABB micro drive to be so small and simple that users of contactors and softstarters are encouraged to move to the benefits of variable-speed control. The ACS55 is a simple drive, programmed by switches. Extended programming is possible via a PC if required, as is programming without power.

### Where can it be used?

- Washing machines
- Mixers
- Boring machines
- Pizza ovens
- Vacuum cleaners
- Sliding doors
- Dryers
- Dishwashers
- Treadmills
- Car washing machines
- Rotating billboards
- Electric gates

### Highlights

- Quick and easy installation - less than 5 minutes
- No programming - easy and descriptive interface
- Can be programmed via DriveConfig if needed to access extended functions (useful to OEMs)
- Compact size and narrow shape
- Ideal drive for DIN-rail mounting
- 110 V single phase – input gives 240 V, 3-phase output
- Two mounting orientations
- IP20 as standard
- No control panel required
- User interface via three rotary switches and a further eight on/off function DIP switches located on panel front
- Potentiometer option
- Integral EMC filter for 1st environment (EN61800-3), unrestricted distribution (C1)
- Optional first environment filter for extended cable runs
- Optimised switching frequency for low noise (up to 16 kHz)
- Silent motor



For more details, please refer to Technical Catalogue 3AFE68899842

### Main features

Feature	Advantage	Benefit
No programming if required	Inverter parameter settings with DIP switches and potentiometers. Extended programming is possible via DriveConfig if needed	Faster set-up Easier configuration Easy drive for new users
Compact size and narrow shape	Up to 0.37 kW, 45 mm width; 2.2 kW, 67.5 mm width	Less space required for installation
Removable mounting clip	Removable clip allows DIN-rail and wall-mounting from back and side of the unit	Flexible and easy mounting
DriveConfig kit	Fast and safe configuration of an unpowered drive	Simple programming for high volume OEMs - programming in the box, no mains power needed
EMC	First environment. C1 EMC filters as standard ('E' model)	Low EMC emissions
Automatic switching frequency	Increases switching frequency automatically when drive temperature is decreased	Provides lowest possible noise without derating the drive
110-240 V AC, single phase supplies	Output always capable of full 240 V, 3-phase, regardless of supply voltage	Can easily replace single phase cap start motors
RoHS compliance	Compliance achieved during 2007	Environmentally friendly drives



# ABB micro drive

ACS55 – Ratings, types, voltages, prices and dimensions

## 200/240 V, 1-phase supply, 3-phase output

Nominal ratings				Frame	Fuse A Type gG	Heat dissipation W	Cooling requirements m³/h	Type	List price
Nominal	Input current	Nom. output current	Max output						
kW	A	A	A						
With EMC filter									
0.18	4.4	1.4	2.1	A	10	21	* Nat Vent	ACS55-01E-01A4-2	£93
0.37	6.9	2.2	3.3	A	16	32	* Nat Vent	ACS55-01E-02A2-2	£102
0.75	10.8	4.3	6.5	B	16	51	* Nat Vent	ACS55-01E-04A3-2	£122
1.5	18.2	7.6	11.4	D	25	74	26	ACS55-01E-07A6-2	£170
2.2	22	9.8	14.7	D	32	103	26	ACS55-01E-09A8-2	£199
Without EMC filter									
0.18	4.4	1.4	2.1	A	10	21	* Nat Vent	ACS55-01N-01A4-2	£88
0.37	6.9	2.2	3.3	A	16	32	* Nat Vent	ACS55-01N-02A2-2	£97
0.75	10.8	4.3	6.5	B	16	51	* Nat Vent	ACS55-01N-04A3-2	£114
1.5	18.2	7.6	11.4	C	25	74	26	ACS55-01N-07A6-2	£159
2.2	22	9.8	14.7	C	32	103	26	ACS55-01N-09A8-2	£186

\* Ensure minimum installation space is provided, see User's Manual for details

## 100/120 V, 1-phase supply, 3-phase output

Nominal ratings				Frame	Fuse A Type gG	Heat dissipation W	Cooling requirements m³/h	Type	List price
Nominal	Input current	Nom. output current	Max output						
kW	A	A	A						
With EMC filter									
0.18	6.4	1.4	2.1	A	10	24	* Nat Vent	ACS55-01E-01A4-1	£101
0.37	9.5	2.2	3.3	A	16	35	* Nat Vent	ACS55-01E-02A2-1	£113
Without EMC filter									
0.18	6.4	1.4	2.1	A	10	24	* Nat Vent	ACS55-01N-01A4-1	£98
0.37	9.5	2.2	3.3	A	16	35	* Nat Vent	ACS55-01N-02A2-1	£106

\* Ensure minimum installation space is provided, see User's Manual for details


## Dimensions and weights

Frame size	H1 mm	H2 mm	W mm	D mm	Weight Kg
A	170	146.5	45	128	0.65
B	170	146.5	67.5	128	0.70
C	194	171	70	159	1.1
D	226	203	70	159	1.1

H1 = Height with mounting clip  
H2 = Height without mounting clip  
W = Width  
D = Depth



## ACS55 typical I/O connections

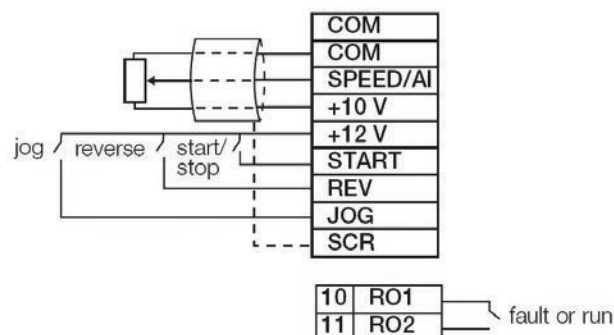

## Options and interfaces

### Potentiometer

Potentiometer with two switches: start/stop and forward/reverse direction. No external power source is needed for the potentiometer, connects directly to drive I/O.



### DriveConfig programming with no power

To increase the number of applications possible with the ACS55, the DriveConfig kit can be used to access an extended parameter set. It is still possible to programme in the usual way, if these extended features are not required. DriveConfig also allows programming in the box without power.



# ABB micro drive

## 0.37 kW to 4 kW, ACS150

Motor control method - scalar

200/240 V, 1-phase supply, 0.37 kW - 2.2 kW

200/240 V, 3-phase supply, 0.37 kW - 2.2 kW

380/480 V, 3-phase supply, 0.37 kW - 4 kW

### What is an ABB micro drive, ACS150?

The ABB micro drive meets the requirements of OEMs, machinery builders and panel builders. It is a component that is bought, together with other components, from a logistical distributor. ABB micro drives are designed to encourage users of contactors and softstarters to move to the benefits of variable-speed control. The ACS150 extends the capability of the ACS55 (see page 10), by adding an extended range of power frames and programmability. The ACS150 can solve more difficult tasks like PID functionality. To retain the simplicity of an ABB micro drive, the ACS150 does not have a serial communications interface or extended options but does have a fixed keypad and speed control potentiometer.

### Where can it be used?

ACS150 can be used to control less demanding components in any machine, fans or pumps or anywhere where a fixed speed motor needs to go to variable-speed control. The functionality of the drive is designed to compliment the ABB machinery drives and ABB motion control drives.

### Highlights

- PID controller built-in
- DC hold stop ensures stationary motor shaft
- IR compensation improves starting torque for heavy loads
- Parameter lock prevents tampering by unauthorised staff
- DIN rail or screw mounting as standard

### Main features

Feature	Advantage	Benefit
FlashDrop*	Faster and easier drive set-up and commissioning for volume manufacturing. Programming in the box	No need for high voltage safe programming areas Parameters can be hidden for clarity Programme the drive during machine production build-up
Fixed interface	Simple drive with comfortable and robust interface Easy to navigate parameter structure	Integrated control panel with clear LCD display, backlight and buttons for editing and control
Fixed potentiometer	Intuitive speed setting	Integrated potentiometer. Settings shown on the control panel
Programmable functions	Useful control functions like PID, accelerating rates and start/stop modes included	Take control of the motor and reduce cost in the installation
Built-in EMC filter	No need for external filtering	2nd environment built-in filter. Complying with IEC 61800-3 as standard
Built-in brake chopper	Reduced cost, saved space and simple wiring	100 percent braking capability
Flexible installation	Optimum layout and efficient cabinet space usage	Screw, DIN-rail, sideways and side-by-side mounting Unified height and depth
Drive protection	Latest solutions to protect the drive and offer trouble-free use and the highest quality	The drive protects itself when power is connected to the motor terminals. I/O protected against short-circuit. Coated boards included as standard
Brand labelling	Drive logo, control panel logo, manuals and box can be printed with machine builders logo and name	Drives and packaging badged to your design
RoHS compliance	Compliance achieved during 2007	Environmentally friendly drives

\* For details of FlashDrop, see user interfaces in ABB machinery drive section (page 18)



For more details, please refer to Technical Catalogue 3AFE68596114

- IP20 enclosure
- Fixed basic control panel
- Dedicated control potentiometer
- Two-year warranty
- Flashdrop - parameter programming whilst still in its box - excellent for OEMs
- Protected against wiring errors: shows fault if power cable is inadvertently connected to motor terminals
- Automatic noise reduction
- Optional short or long parameter mode for standard or advanced users
- Unified height across the power range simplifies cabinet design
- Drive branding possible for large users

# ABB micro drive

## ACS150 – Ratings, types, voltages and prices

### 200/240 V, 1-phase supply voltage

Nominal ratings		Max Output A	Frame	Fuse A Type gG	Heat dissipation W	Cooling requirements m³/h	Type	List price
Nominal	Nom. output current							
kW	A							
0.37	2.4	4.2	R0	10	25	*Nat Vent	ACS150-01E-02A4-2	£100
0.75	4.7	8.2	R1	16	46	24	ACS150-01E-04A7-2	£117
1.1	6.7	11.7	R1	20	71	24	ACS150-01E-06A7-2	£147
1.5	7.5	13.1	R2	25	73	21	ACS150-01E-07A5-2	£165
2.2	9.8	17.2	R2	35	96	21	ACS150-01E-09A8-2	£198

\* Ensure enough space around the unit - refer to the User's Manual for details

### 200/240 V, 3-phase supply voltage

3-phase, 240 V is also available for customers supplying the North American market. Please enquire for details.

### 380/480 V, 3-phase supply voltage

Nominal ratings		Max Output A	Frame	Fuse A Type gG	Heat dissipation W	Cooling requirements m³/h	Type	List price
Nominal	Nom. output current							
kW	A							
0.37	1.2	2.1	R0	10	11	*Nat Vent	ACS150-03E-01A2-4	£159
0.55	1.9	3.3	R0	10	16	*Nat Vent	ACS150-03E-01A9-4	£168
0.75	2.4	4.2	R1	10	21	13	ACS150-03E-02A4-4	£183
1.1	3.3	5.8	R1	10	31	13	ACS150-03E-03A3-4	£201
1.5	4.1	7.2	R1	16	40	13	ACS150-03E-04A1-4	£220
2.2	5.6	9.8	R1	16	61	19	ACS150-03E-05A6-4	£315
3	7.3	12.8	R1	16	74	24	ACS150-03E-07A3-4	£379
4	8.8	15.4	R1	20	94	24	ACS150-03E-08A8-4	£431

\* Ensure enough space around the unit - refer to the User's Manual for details

The drive can be fitted with the NEMA 1 kit for easy wall-mounting and convenient protection, see user interfaces in ABB machinery drive section, page 18.

# ABB micro drive

ACS150 – Dimensions, I/O and options

## Dimensions and weights

Cabinet-mounted drives (UL open), wall mounted drives (NEMA 1)

Frame size	IP20 UL open						NEMA 1				
	H1	H2	H3	W	D	Weight	H4	H5	W	D	Weight
	mm	mm	mm	mm	mm	Kg	mm	mm	mm	mm	Kg
R0	169	202	239	70	142	1.1	257	280	70	142	1.5
R1	169	202	239	70	142	1.3	257	280	70	142	1.5
R2	169	202	239	105	142	1.5	257	282	105	142	1.5

H1 = Height without fastenings and clamping plate

H2 = Height with fastenings but without clamping plate


H3 = Height with fastenings and clamping plate

H4 = Height with fastenings and NEMA 1 connection box

H5 = Height with fastenings, NEMA 1 connection box and hood

W = Width


D = Depth

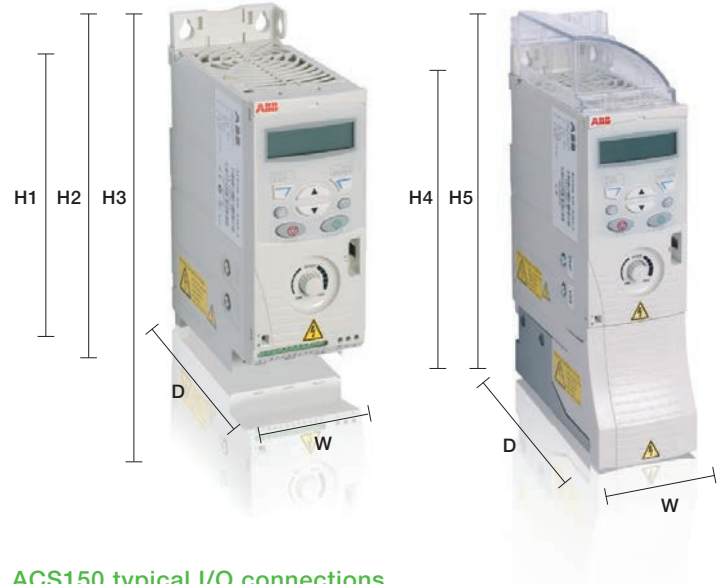

## Options available


- Input and output chokes
- Brake chopper resistors (all drives in the ACS150 range have integral chopper)
- 1st. environment EMC filters - footprint style
- Low leakage EMC filters < 30mA leakage
- FlashDrop - programming without power
- NEMA kit allows installations to be neater and provides mechanical support for glanded cables

## ACS150 typical I/O connections

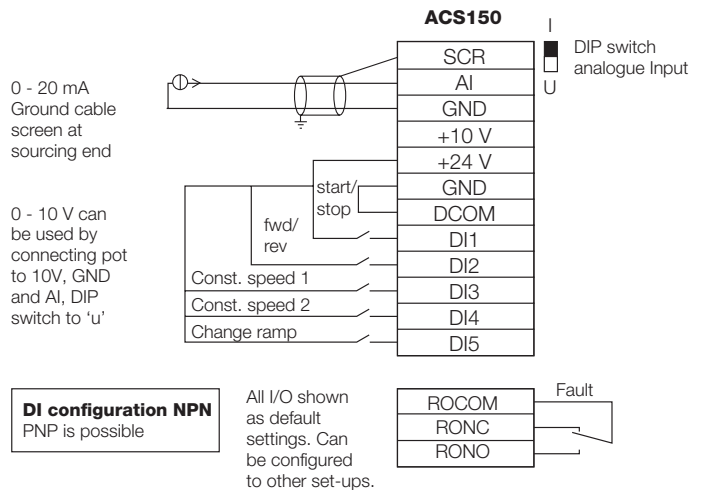

## ACS150 user interfaces

The ACS150 has a simple user interface, consisting of I/O connections and a fixed programming keypad. An integrated speed control potentiometer is also provided.

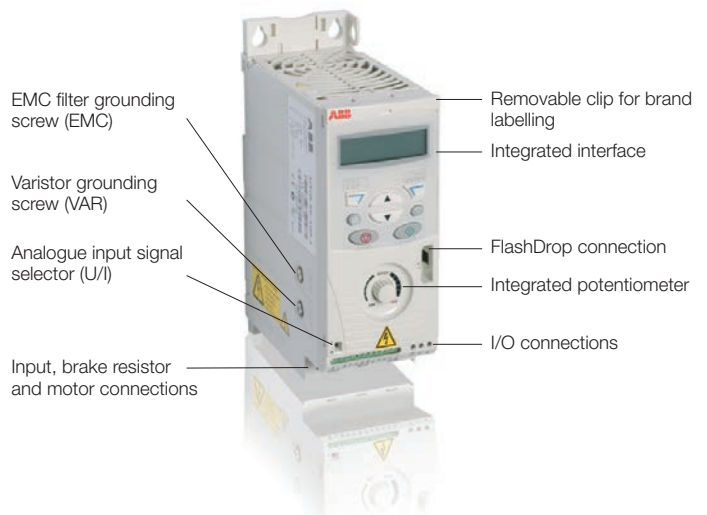



# ABB machinery drive

## 0.37 kW to 22 kW, ACS355

Motor control method - scalar, vector (open and closed loop)

200/240 V, 1-phase supply, 0.37 kW - 2.2 kW

200/240 V, 3-phase supply, 0.37 kW - 11 kW

380/480 V, 3-phase supply, 0.37 kW - 22 kW

### What is an ABB machinery drive?

ABB machinery drives are designed for the machine building sector. In serial type manufacturing the consumed time per unit is critical. The drive is designed to be optimal in terms of installation, setting parameters, available machinery features and commissioning. The basic product has been made as user-friendly as possible, yet providing high intelligence. The drive offers diverse functionality to cater for the most demanding needs. The drive is also equipped with a dual channel safe torque-off interface to SIL3/PL e.

### Where can it be used?

ABB machinery drives are designed to meet the requirements of an extensive range of machinery applications. The drive is ideal for food and beverage, material handling, textile, printing, rubber and plastics and woodworking applications. The higher IP66 class variant meets all of the relevant hygiene requirements for the food and beverage industry.

The functionality of this ABB drive is designed to complement the ABB motion control drives and the ABB micro drives.

### Highlights

- FlashDrop - parameter programming with drive still in its box - excellent for OEMs
- Sequence programming designed for food and beverage and materials handling applications - Eight-steps included



For more details, please refer to Technical Catalogue 3AFE68596106

- Impressive software and compact hardware
- Unified height and depth across the power range simplifies cabinet design
- Optimised interfaces for users and machines (can select Basic or Assistant control panel)
- Protected against wiring errors: shows fault if power cable is inadvertently connected to motor terminals
- Automatic noise reduction
- Drive branding possible for large users

### Main features

Feature	Advantage	Benefit
FlashDrop*	Faster and easier drive set-up and commissioning for volume manufacturing. Programming with no power	Fast, safe and trouble-free method to set up and commission without powering up the drive - patented
Safe torque-off	Built-in compliance to new machinery directive	SIL3/PL e certified dual channel input - TÜV approved
Sequence programming	Application specific 8-state programming with comprehensive triggering conditions	Logic programming included as standard Reduces the need for external PLC
Common DC link	Connection to existing DC power sources (patented)	Easy integration into high performance machines
User interfaces	Wide range, including Assistant panel	Cost efficient approach - meets requirements of OEM
Fieldbus	Extensive range of industrial fieldbus option modules available	Connectability to all of the most popular fieldbuses
24 V 'live keypad' operation	Connect 24 V to the drive via the MPOW option	Keep fieldbus, control card and I/O healthy while able to remove the main supply - safer maintenance
Built-in EMC filter	2nd environment filter complying with IEC 61800-3 as standard	No extra space, parts, time or cost required
Built-in brake chopper	100 percent braking capability	Reduces cost, saves space and simplifies wiring
Drive protection	Latest solutions to protect the drive and offer trouble-free use and the highest quality	The drive protects itself when power is connected to the motor terminals. I/O protected against short-circuit Coated boards included as standard
IP66/69k enclosure option	Makes drive suitable for hose down applications	Meets food hygiene standards in a wall-mounted enclosure
Brand labelling	Drive logo, control panel logo, manuals and box can be printed with machine builders logo and name	Drives and packaging badged to your design
RoHS compliance	Compliance achieved during 2007	Environmentally friendly drives

\* For details of FlashDrop, see user interfaces in ABB machinery drive section, page 18

# ABB machinery drive

## ACS355 - Ratings, types, voltages and prices

### 200/240 V, 1-phase supply voltage

Nominal ratings		Max Output A	Frame	Fuse A Type gG	Heat dissipation W	Cooling requirements m³/h	Type (code shown is IP20)	IP20 list price without control panel*	IP66 list price with control panel**
Nominal	Nom. output current								
kW	A								
0.37	2.4	4.2	R0	10	48	*Nat Vent	ACS355-01E-02A4-2	£111	n/a
0.75	4.7	8.2	R1	16	72	24	ACS355-01E-04A7-2	£139	n/a
1.1	6.7	11.7	R1	20	97	24	ACS355-01E-06A7-2	£163	n/a
1.5	7.5	13.1	R2	25	101	21	ACS355-01E-07A5-2	£179	n/a
2.2	9.8	17.2	R2	35	124	21	ACS355-01E-09A8-2	£219	n/a

\* Ensure enough space around the unit - refer to the User's Manual for details

\* Note: IP20 drives require a keypad for parameter alteration

\*\* Note: IP66 drives are always delivered with the Assistant keypad

### 200/240 V, 3-phase supply voltage

3-phase, 240 V is also available for customers supplying the North American market. Please enquire for details.

### 380/480 V, 3-phase supply voltage

Nominal ratings		Max Output A	Frame	Fuse A Type gG	Heat dissipation W	Cooling requirements m³/h	Type (code shown is IP20 For IP66 add +B063)	IP20 list price without control panel*	IP66 list price with control panel**
Nominal	Nom. output current								
kW	A								
0.37	1.2	2.1	R0	10	35	*Nat Vent	ACS355-03E-01A2-4	£189	£400
0.55	1.9	3.3	R0	10	40	*Nat Vent	ACS355-03E-01A9-4	£199	£402
0.75	2.4	4.2	R1	10	50	13	ACS355-03E-02A4-4	£218	£417
1.1	3.3	5.8	R1	10	60	13	ACS355-03E-03A3-4	£247	£463
1.5	4.1	7.2	R1	16	69	13	ACS355-03E-04A1-4	£300	£526
2.2	5.6	9.8	R1	16	90	19	ACS355-03E-05A6-4	£348	£600
3	7.3	12.8	R1	16	107	24	ACS355-03E-07A3-4	£454	£777
4	8.8	15.4	R1	20	127	24	ACS355-03E-08A8-4	£517	£882
5.5	12.5	21.9	R3	25	161	52	ACS355-03E-12A5-4	£599	£1,043
7.5	15.6	27.3	R3	30	204	52	ACS355-03E-15A6-4	£777	£1,237
11	23.1	40.4	R3	50	301	71	ACS355-03E-23A1-4	£949	n/a
15	31.0	54.3	R4	80	408	96	ACS355-03E-31A0-4	£1,216	n/a
18.5	38.0	66.5	R4	100	498	96	ACS355-03E-38A0-4	£1,443	n/a
22	44.0	77.0	R4	100	588	96	ACS355-03E-44A0-4	£1,764	n/a

\* Ensure enough space around the unit - refer to the User's Manual for details

\* Note: IP20 drives require a keypad for parameter alteration

\*\* Note: IP66 drives are always delivered with the Assistant keypad

### Control panel for ACS355

Control panel	Type	Price
Assistant control panel	ACS-CP-A	£86†
Basic keypad	ACS-CP-C	£24

† Price of control panel only when purchased with drive

Panel mounting kit and user interface descriptions, see page 18

# ABB machinery drive

ACS355 – Dimensions, I/O and options

## Dimensions and weights

Frame size	IP20 UL Open							NEMA 1/UL Type 1							IP66/67/UL Type 4x						
	H1	H2	H3	W	D1	D2	Weight	H4	H5	W	D1	D2	Weight	H	W	D1	Weight				
	mm	mm	mm	mm	mm	mm	Kg	mm	mm	mm	mm	mm	kg	mm	mm	mm	Kg				
R0	169	202	239	70	161	187	1.2	257	280	70	169	187	1.6	-	-	-	-				
R1	169	202	239	70	161	187	1.2	257	280	70	169	187	1.6	305	195	281	7.7				
R2	169	202	239	105	165	191	1.5	257	282	105	169	191	1.9	-	-	-	-				
R3	169	202	236	169	169	195	2.5	260	299	169	177	195	3.1	436	246	277	13				
R4	181	202	244	260	169	195	4.4	270	320	260	177	195	5.0	-	-	-	-				

H = Height

H1= Height without fastenings and clamping plate

H2 = Height with fastenings but without clamping plate

H3 = Height with fastenings and clamping plate


H4 = Height with fastenings and NEMA 1 connection box

H5 = Height with fastenings, NEMA 1 connection box and hood

W = Width


D1 = Standard depth

D2 = Depth with MREL or MTAC option

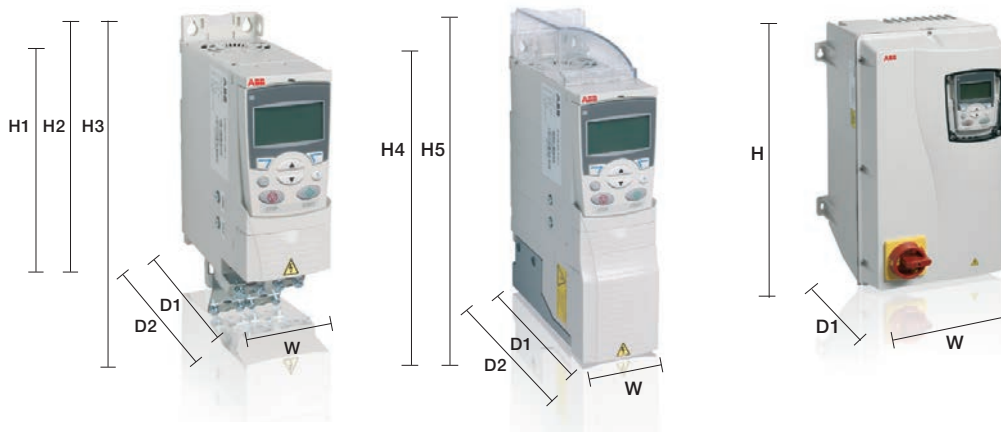

## STO connections



The ACS355 has a dual channel STO (safe torque-off) input as standard, certified to BS EN 62061 and BS EN 13849-1

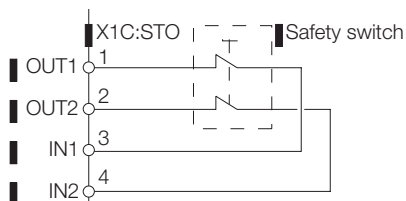

## Options available


- Input and output chokes
- Brake chopper resistors (all drives in the ACS355 range have integral chopper)
- 1st. environment EMC filters - footprint style
- Low leakage EMC filters < 30 mA leakage
- FlashDrop, programming in the box
- Fieldbus modules
- NEMA kit allows installations to be neater and provides mechanical support for glanded cables
- An extensive range of user interfaces is available - please see following pages
- IP66 pressure relief valves

## Typical control connections

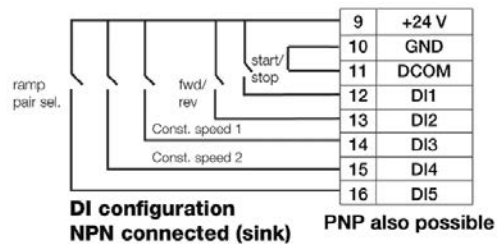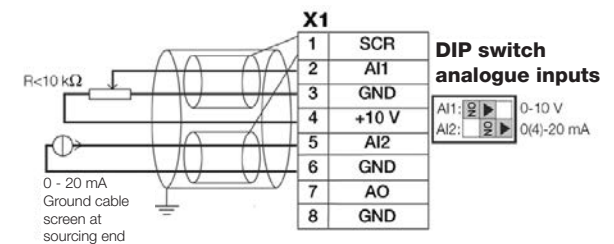

DI configuration  
NPN connected (sink)

PNP also possible

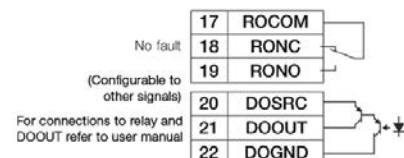

# ABB machinery drive

## ACS355 – User interfaces

### Assistant control panel (+J400)

The Assistant control panel features a multilingual alphanumeric display for easy drive programming. The control panel has various assistants and a built-in help function to guide the user. It includes a real-time clock, which is used during fault logging and in controlling the drive, such as start/stop. The control panel can be used for copying parameters for backup or for downloading to another drive. A large graphical display and soft keys make it extremely easy to navigate. For further information, see ABB general purpose drive section on page 28.



### Basic control panel (+J404)

The Basic control panel features a single line numeric display. The panel can be used to control the drive, set the parameter values or copy them from one drive to another, or view changes.



### Panel cover

The panel cover protects the drive when no control panel is used. The ABB machinery drive is delivered with a panel cover as standard, thereby providing a cost effective package. In addition, there are two alternative control panels available as options, see above.



### NEMA 1 kit

The NEMA 1 kit is a convenient cover which is added to the drive and enables easy wall-mounting. It includes a connection box for cable gland or conduit tube installation and a hood for protection against dirt and dust.



### Panel mounting kit, IP54 and IP66

The panel mounting kits enable mounting of control panels onto cabinet doors. These kits include a 3 m extension cable, a gasket, mounting screws and a mounting template - two versions are now available, IP54 and IP66. The IP66 has an additional keypad membrane cover.

Note: IP66 cover is not suitable for outdoor use.



### Relay extension module (+L511)

Add an additional three relays to the ACS355 to allow greater use of the drives programme. Fits behind the keypad.



### Potentiometer (+J402)

Potentiometer with two switches: start/stop and forward/reverse direction. No external power source is needed for the potentiometer. Fits to the drive I/O.



### FlashDrop

Programme the drive whilst still in the box, with no power. Perfect for OEMs and machine builders. FlashDrop is a powerful palm-sized tool for fast and easy parameter selecting and setting. It gives the possibility to hide selected parameters to protect the machine. The tool stores 20 parameter sets, which can be moved between a PC and a drive. Safe programming during machine building production for unskilled staff.



### Fieldbus interfaces

Extensive range of plug-in fieldbus interfaces, allowing connection to Profibus, DeviceNet, CanOpen, Modbus RTU and Ethernet and many others.



### 24V “live keypad” options

There are two ways of powering the fieldbus modules, so that they operate when the main power is removed.



FEPA - maintains power to the fieldbus module only.



MPOW (+G406) - Powers the fieldbus module, the control card, the drive I/O and the drive keypad, generating the functionality commonly known as ‘live keypad’ operation.

### DriveWindow Light PC tool

DriveWindow Light is a parameterisation and commissioning tool used to set-up and commission the drive. Monitoring and diagnostic facilities are included, as well as a local control panel. Wizards are included to guide the user through the most commonly performed tasks.



# ABB general purpose drive for fans and pumps

## 0.37 kW to 22 kW, ACS310

Motor control method – Scalar

200/240 V, 1-phase supply, 0.37 kW - 2.2 kW

200/240 V, 3-phase supply, 0.37 kW - 11 kW

380/480 V, 3-phase supply, 0.37 kW - 22 kW

### What is an ABB general purpose drive for fans and pumps?

ABB general purpose drives include a dedicated fan and pump controller designed for squared-torque applications such as booster pumps, submersible pumps, irrigation pumps and centrifugal fans.

The drive design includes a powerful set of features which benefit pump and fan applications including built-in PID controllers and PFC (pump and fan control). The drives also have pre-programmed protection functions such as pipe cleaning (anti-jam) and duty standby functionality, including soft pipe filling to reduce leaks.

These features, combined with pre-programmed application macros, an intuitive user interface, and several assistant screens, speed up the installation, parameter setting and commissioning of the drive.

### Where can it be used?

The ABB general purpose drive's software features are ideal for solving the challenges and issues surrounding pumping in general, and those of water and wastewater in particular.

The drive is designed to compliment the features offered by the industry specific products for water and wastewater (see page 29).



For more details, please refer to Technical Catalogue 3AUA0000051082

### Highlights

- Pump and soft pump and fan control (PFC and SPFC), for multi-pump and soft fill control
- Pipe cleaning (anti-jam) and pipe fill functions
- Multiple PID set points, allowing for automatic duty/assist/standby schemes to be implemented
- Energy efficiency counters, real-time clock
- Energy optimiser – optimises the motor control for the application to run with minimum energy requirements
- Load analyser for optimised dimensioning of the drive, motor and process
- Embedded Modbus RS-485 fieldbus interface
- FlashDrop tool for fast parameter setting, without mains power

### Main features

Feature	Advantage	Benefit
Pump and fan control (PFC) feature to control pumps and fans in parallel	One drive controls several pumps or fans and eliminates the need for an external programmable logic controller Interlock function enables one motor to be disengaged from the mains supply while others continue operating in parallel	Saves cost of additional drives and external PLC Longer life for pump or fan system while reducing maintenance time and costs. Maintenance can be carried out safely without stopping the process
Soft pump and fan control feature (SPFC)	Reduces unwanted pressure peaks in pumps and pipelines when an auxiliary motor is started	Reduces maintenance costs and leaks typically seen in DOL starting. Longer life for pump or fan system
Pump protection functions	Pre-programmed features like: Pipe cleaning (anti-jamming), inlet/outlet pressure supervision and detection of under or overload for preventive maintenance	Reduces maintenance costs Smoother processes: improved and optimised system Longer life for pump and fan system, reduced maintenance costs
Energy monitoring and optimising features	Drive monitors the saved energy compared to equivalent DOL operation Drive controls the motor voltage dependant on the load	Energy savings presented in local currency and CO <sub>2</sub> Consumed energy optimised across the speed and load range
Full output current at 50°C ambient	Drive can be operated in ambient temperatures up to 50°C without de-rating the output current	Optimised drive dimensioning for wide temperature range
Unified height and depth	Optimum installation layout, as all drive frames are the same height – only the width changes	Space savings. Easier to lay the cabinet back panel out
Best-in-class user interfaces	Assistant and Basic keypads with intuitive operation. Short and long menus, Assistants and wizards for ease of use	Users are supported as they program the drive, can tailor the open menu views to suite there customer needs
FlashDrop*	Faster and easier drive set up and commissioning for volume manufacturing	Fast, safe and trouble-free method to set up and commission without powering up the drive - patented
RoHS compliance	Compliance achieved during 2007	Environmentally friendly drives

\* For details of FlashDrop, see user interfaces (page 22)

# ABB general purpose drives for fans and pumps

ACS310 – Ratings, types, voltages and prices

## 200/240 V, 1-phase supply voltage

Nominal ratings		Max Output A	Frame	Fuse A Type gG	Heat dissipation W	Cooling requirements m³/h	Type	IP20 list price without control panel*
Nominal	Nom. output current							
kW	A							
0.37	2.4	4.0	R0	10	48	*Nat Vent	ACS310-01E-02A4-2	£110
0.75	4.7	7.9	R1	16	72	24	ACS310-01E-04A7-2	£125
1.1	6.7	11.4	R1	20	97	24	ACS310-01E-06A7-2	£146
1.5	7.5	12.6	R2	25	101	21	ACS310-01E-07A5-2	£162
2.2	9.8	16.5	R2	35	124	21	ACS310-01E-09A8-2	£197

\* Ensure enough space around the unit - refer to the User's Manual for details

\* Drives require a control panel for parameter alteration

For 50°C ratings contact ABB

## 200/240 V, 3-phase supply voltage

3-phase 240 V is also available for customers supplying the North American market. Please enquire for details.

## 380/480 V, 3-phase supply voltage

Nominal ratings		Max Output A	Frame	Fuse A Type gG	Heat dissipation W	Cooling requirements m³/h	Type	IP20 list price without control panel*
Nominal	Nom. output current							
kW	A							
0.37	1.3	2.1	R0	10	35	*Nat Vent	ACS310-03E-01A3-4	£171
0.55	2.1	3.3	R0	10	40	*Nat Vent	ACS310-03E-02A1-4	£180
0.75	2.6	4.2	R1	10	50	13	ACS310-03E-02A6-4	£197
1.1	3.6	5.8	R1	10	60	13	ACS310-03E-03A6-4	£219
1.5	4.5	7.2	R1	15	69	13	ACS310-03E-04A5-4	£285
2.2	6.2	9.8	R1	15	90	19	ACS310-03E-06A2-4	£315
3	8	12.8	R1	20	107	24	ACS310-03E-08A0-4	£404
4	9.7	15.4	R1	25	127	24	ACS310-03E-09A7-4	£459
5.5	13.8	21.9	R3	30	161	52	ACS310-03E-13A8-4	£533
7.5	17.2	27.3	R3	35	204	52	ACS310-03E-17A2-4	£702
11	25.4	40.4	R3	50	301	71	ACS310-03E-25A4-4	£857
15	34.1	54.3	R4	80	408	96	ACS310-03E-34A1-4	£1,101
18.5	41.8	66.5	R4	100	498	96	ACS310-03E-41A8-4	£1,284
22	48.4	77.0	R4	100	588	96	ACS310-03E-48A4-4	£1,569

\* Ensure enough space around the unit - refer to the User's Manual for details

\* Drives require a control panel for parameter alteration

For 50°C ratings contact ABB

## Control panel for ACS310

Control panel	Type	Price
Assistant control panel	ACS-CP-A	£86**
Basic keypad	ACS-CP-C	£24


\*\* Price of control panel only when purchased with drive

Panel mounting kit and user interface descriptions, see page 22

# ABB general purpose drives for fans and pumps

ACS310 – Dimensions, I/O and options

## Dimensions and weights

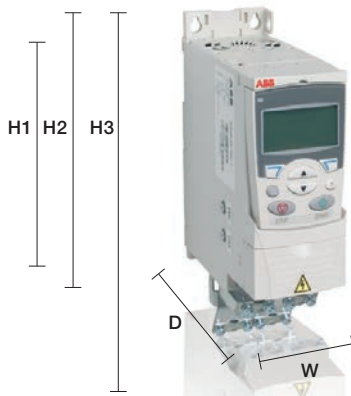

Cabinet-mounted drives (IP20 UL open)



Wall-mounted drives (NEMA 1)

	IP20 UL Open						NEMA 1/UL Type 1				
Frame size	H1 mm	H2 mm	H3 mm	W mm	D mm	Weight Kg	H4 mm	H5 mm	W mm	D mm	Weight kg
R0	169	202	239	70	161	1.1	257	280	70	169	1.5
R1	169	202	239	70	161	1.3	257	280	70	169	1.7
R2	169	202	239	105	165	1.5	257	282	105	169	1.69
R3	169	202	236	169	169	2.9	260	299	169	177	3.5
R4	181	202	244	260	169	4.4	270	320	260	177	5.0


H1 = Height without fastenings and clamping plate  
H2 = Height with fastenings but without clamping plate  
H3 = Height with fastenings and clamping plate  
H4 = Height with fastenings and NEMA 1 connection box  
H5 = Height with fastenings, NEMA 1 connection box and hood  
W = Width  
D = Depth

## Options available

- Input and output chokes
- ACS310 has no braking options
- 1st environment EMC filters - footprint style
- Low leakage EMC filters < 30mA leakage
- FlashDrop
- NEMA kit allows installations to be neater and provides mechanical support for glanded cables
- An extensive range of user interfaces is available - please see following pages

## Typical control connections

- All I/O are programmable for other configurations

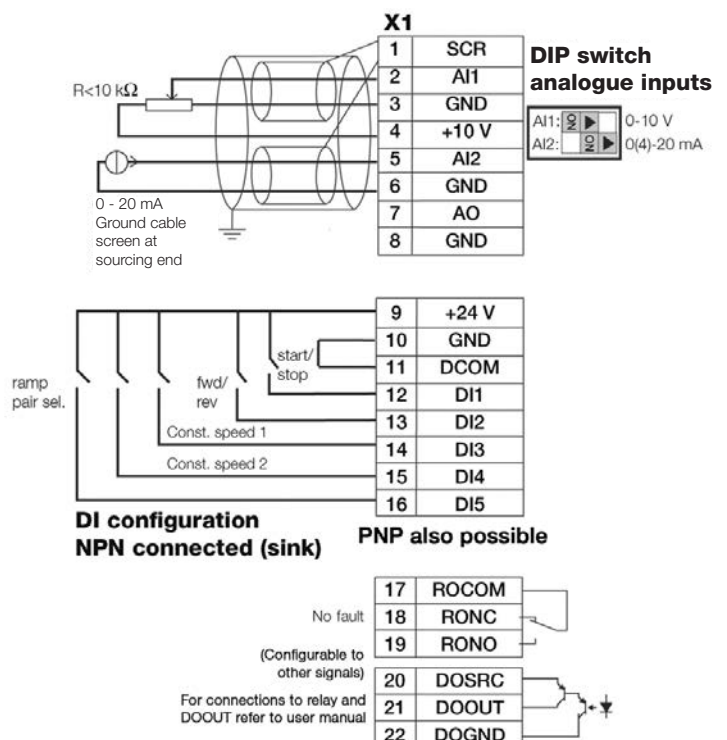

# ABB general purpose drives for fans and pumps

## ACS310 – User interfaces

### Assistant control panel (+J400)

The Assistant control panel features a multilingual alphanumeric display for easy drive programming. The control panel has various assistants and a built-in help function to guide the user. It includes a real time clock, which is used during fault logging and in controlling the drive, such as start/stop. The control panel can be used for copying parameters for backup or for downloading to another drive. A large graphical display and softkeys make it extremely easy to navigate. For further information, see ABB general purpose drive section on page 28.



### Basic control panel (+J404)

The Basic control panel features a single line numeric display. The panel can be used to control the drive, set the parameter values or copy them from one drive to another.



### Panel cover

The panel cover protects the drive's connection when no control panel is used. The ABB general purpose drive is delivered with a panel cover as standard, thereby providing a cost effective package. In addition, there are two alternative control panels available as options, see above.



### NEMA 1 kit

The NEMA 1 kit is a convenient cover which is added to the drive and enables easy wall-mounting. It includes a connection box for cable gland or conduit tube installation and a hood for protection against dirt and dust.



### Panel mounting kit, IP54 and IP66

The panel mounting kit enables mounting of control panels on cabinet doors. These kits include a 3 m extension cable, a gasket, mounting screws and a mounting template - two versions are now available, IP54 and IP66. The IP66 has an additional keypad membrane cover.



Note: IP66 cover is not suitable for outdoor use.

### Relay extension module (+L511)

Add an additional three relays to the ACS310 to allow greater use of the PFC program. Fits behind the keypad.



### FlashDrop

Programme the drive whilst still in the box, with no power. Perfect for OEMs and machine builders. FlashDrop is a powerful palm sized tool for fast and easy parameter selecting and setting. It gives the possibility to hide selected parameters to protect the machine. The tool stores 20 parameter sets, which can be moved between a PC and a drive. Safe programming during machine building production for unskilled staff.



### Fieldbus communications

ACS310 has no industrial fieldbus interfaces, but it does have an RS485 Modbus communications link built-in. This link can be used to communicate to industrial HMIs or remote monitoring devices or to a fieldbus via a suitable gateway.

### DriveWindow Light PC tool

DriveWindow Light is a parameterisation and commissioning tool used to set-up and commission the drive. Monitoring and diagnostic facilities are included, as well as a local control panel. Wizards are included to guide the user through the most commonly performed tasks.



# ABB general purpose drive (for general industry)

## 0.75 kW to 355 kW, ACS550

Motor control method - Scalar, vector speed and torque (open and closed loop)

208/240 V, 3-phase supply, 0.75 kW - 75 kW

380/480 V, 3-phase supply, 0.75 kW - 355 kW

### What is an ABB general purpose drive?

The ABB general purpose drive is simple to buy, install, configure and use, saving considerable time. It is widely available through ABB's distributors. The drive has a common user and process interface, common software tools for sizing, commissioning and maintenance and common spare parts. A wide range of fieldbus options gives excellent connectivity and new energy monitoring allows energy management. IP21 and IP54 variants mean it can be installed in almost any environment.

### Where can it be used?

The ABB general purpose drive can be used in a wide range of industries. Typical applications are many and varied. The vector motor control means the drive can be used to fulfil the needs of reasonably demanding applications of all kinds. For highly demanding torque applications, the ABB industrial drive with DTC should be chosen. The ABB general purpose drive is ideal in those situations where there is a need for simplicity to install, commission and use and where reasonable amounts of flexibility and functionality are required.

### Highlights

- Easy ordering
- Quick installation
- Rapid start-up
- Trouble-free use

### Main features

Feature	Advantage	Benefit
FlashDrop*	Faster and easier drive set up and commissioning for volume manufacturing. Programming with no power.	Fast, safe and trouble-free method of programming available without powering up the drive - patented
Application macros	Ready-made macros for common applications	Fast single parameter set-up
Assistant control panel	Two softkeys, function of which changes according to the state of the panel. Built-in "Help" button, giving programming hints. Real-time clock, allows timed tracing of faults and setting of parameters to activate functions at various times of day. Changed parameters menu also included	Easy commissioning - Start-up assistant User friendly maintenance - Maintenance assistant Rapid fault diagnosis - Diagnostic assistant Quick access to all parameter changes - separate list
Clone drives	Copy parameters from drives of differing rating or software versions	Easy to copy parameters to other drives, reducing commissioning times
Programmable customer load curve	8-point load curve set during commissioning, with under and overload regions, as well as alarm conditions	Allows precise monitoring of changes in plant conditions and early warning of potential problems
Brake chopper	Built-in up to 11 kW	Reduced cost
Swinging chokes	Swinging DC chokes - matches the right inductance to the right load, thereby suppressing and reducing harmonics	Reduces total harmonic distortion (THD) emissions up to 25 percent, even at reduced load
EMC	1st and 2nd environment RFI filters as standard	No need for additional external filtering
Fieldbus	Built-in Modbus using RS 485 Optional plug-in fieldbus modules	Reduced cost, full access to industrial networks
Sensorless vector control	Improved motor control performance	Enables wider range of applications to be tackled
Low peak volts and du/dt	Motor peak voltage and rate of rise meets IEC 60034-17	Kind to motor windings
RoHS compliance	Compliance achieved during 2007	Environmentally friendly drives

\* For details of FlashDrop, see user interfaces (page 28)



For more details, please refer to Technical Catalogue 3AFE64792857

- Easy interfacing
- Wide power range in wall-mounted IP21 and IP54 variants
- Assistant control panel for intuitive use
- Patent pending swinging choke for superior harmonic reduction, even at reduced motor load
- Sensorless vector and scalar control
- Integral EMC filter for 1st and 2nd environment as standard
- Flexible fieldbus system with built-in Modbus and numerous internally mountable fieldbus adapters
- New energy monitoring features record energy, CO<sub>2</sub> and money saved (compared to equivalent DOL)

# ABB general purpose drive (for general industry)

ACS550 – Variants, ratings, types, voltages and prices

## ABB general purpose drive variants

### Wall-mounted - 0.75 kW - 160 kW, 380/480 V

- Wall-mounted, frame sizes R1-R6
- IP21 as standard, IP54 as option
- 55 percent size reduction at 160 kW
- Built-in EMC filter
- Standard software, easy to configure
- Built-in Modbus interface
- Cable connection box
- Brake chopper in frame sizes R1-R2
- Assistant control panel
- Built-in patented swinging choke
- Sensorless vector control, scalar control
- FlashDrop compatible
- RoHS compliant



### Free-standing - 160 kW - 355 kW, 380/480 V

- Free-standing, frame size R8
- IP21 as standard, very compact design
- Built-in EMC filter
- Standard software, easy to configure
- Built-in Modbus interface
- Pedestal unit on wheels, easy handling
- Assistant control panel
- Sensorless vector control, scalar control
- Free-standing units are not FlashDrop compatible
- Not RoHS compliant
- For dimensions and prices, please contact ABB



### 380/480 V, 3-phase supply voltage

† Ratings Normal use		Frame	Fuse A	Heat dissipation W	Cooling requirements m³/h	Type (code shown is IP21, for IP54 add +B055)	IP21 list price without control panel*	IP54 list price without control panel*
P <sub>N</sub> kW	I <sub>2N</sub> A	A	Type gG					
1.1	3.3	R1	10	40	44	ACS550-01-03A3-4	£417	£495
1.5	4.1	R1	10	52	44	ACS550-01-04A1-4	£526	£582
2.2	5.4	R1	10	73	44	ACS550-01-05A4-4	£549	£614
3	6.9	R1	10	97	44	ACS550-01-06A9-4	£604	£658
4	8.8	R1	10	127	44	ACS550-01-08A8-4	£679	£767
5.5	11.9	R1	16	172	44	ACS550-01-012A-4	£822	£876
7.5	15.4	R2	16	232	88	ACS550-01-015A-4	£953	£1,029
11	23	R2	25	337	88	ACS550-01-023A-4	£1,160	£1,226
15	31	R3	35	457	134	ACS550-01-031A-4	£1,488	£1,619
18.5	38	R3	50	562	134	ACS550-01-038A-4	£1,936	£2,078
22	45	R3	50	667	134	ACS550-01-045A-4	£2,265	£2,374
30	59	R4	63	907	280	ACS550-01-059A-4	£2,755	£2,963
37	72	R4	80	1120	280	ACS550-01-072A-4	£3,192	£3,389
45	87	R4	125	1440	280	ACS550-01-087A-4	£3,947	£4,219
55	125	R5	160	1940	350	ACS550-01-125A-4	£4,667	£4,990
75	157	R6	200	2310	405	ACS550-01-157A-4	£5,017	£5,340
90	180	R6	250	2810	405	ACS550-01-180A-4	£6,384	£6,912
110	205	R6	250	3050	405	ACS550-01-195A-4	£7,706	£8,234
132	245	R6a**	315	3260	405	ACS550-01-246A-4	£9,465	£9,992
160	290	R6a**	315	3850	405	ACS550-01-290A-4	£11,184	£11,712

Includes EMC Filter

\* Control panel is required for programming and set-up - see below

† Heavy duty ratings available, when higher overload requirements are needed - contact ABB

\*\* R6a is not an official frame size, it just designates slightly different dimensions

### 208/240 V, 3-phase supply voltage

3-phase 240 V is also available for customers supplying the North American market. Please enquire for details.

### Control panel for ACS550

Control panel	Type	Price
Assistant control panel	ACS-CP-A	£86**

\*\* Price of control panel only when purchased with drive

# ABB HVAC drive (for heating, ventilation & air conditioning industry)

## 0.75 kW to 355 kW, ACH550

Motor control method - Scalar, vector speed and torque (open and closed loop)

208/240 V, 3-phase supply, 0.75 kW - 75 kW

380/480 V, 3-phase supply, 0.75 kW - 355 kW

### What is an ABB HVAC drive?

The ABB HVAC drive, ACH550, is a complete dedicated low voltage AC drive especially for heating, ventilation & air-conditioning (HVAC) applications. The drives are designed to meet the HVAC market requirements including harmonics and EMC standards and for easy integration with building management systems straight out of the box. They feature built-in control programmes specifically designed for HVAC applications like cooling tower fans, supply and return fans, and booster pumps and condensers. With built-in PID control, native BACnet communication, timers, real-time clock and a calendar, ABB drives provide flexible solutions for a wide range of HVAC needs.

### Where can it be used?

ABB HVAC drives make maintaining a buildings comfort zone easy, quick and energy efficient. The drives control the speed of pump, fan and compressor motors used in air handling units, cooling towers, chillers and other HVAC applications. They help reduce the HVAC system's energy consumption by up to 70 percent, and quite often have payback times of less than a year. With more than 500,000 drives for HVAC installed globally, these highly reliable drives with built-in BACnet easily integrate into building management systems. The drives are stocked globally for quick delivery.

### Main features

Feature	Advantage	Benefit
Swinging choke	Patented by ABB Reduces the drives' harmonic signature	Reduces part load harmonics by up to 25 percent, in comparison with traditional chokes. Variable air volume (VAV) systems run on partial loads at least 95 percent of the time
EMC (manufacturer's statement available)	Integrated category C2 (1st environment) filters to BS EN 61800-3	EMC filters suitable for 400 V network connection built into the drive as standard will save panel space, avoid additional wiring, earthing and assembly costs
Additional serial communications	HVAC protocols built in as standard. BACnet, Modbus RTU, FLN Apogee, N2 Metasys, RS 485 Fieldbus adapter allows connection of: LonWorks, Profibus-DP, CANopen, DeviceNet, Modbus/TCP, ControlNet, Ethernet	Can connect to any building management system (BMS)
Real-time clock	Easily set up at time of installation and protected by its own battery back-up	Can be used together with timer functions of the drive to trigger various events (via relays or outputs) within the application software such as time / speed profile, allowing the drive to be a stand-alone unit without the need for BMS input.
System diagnostics	Diagnostic assistant, on board fault history with real time of when fault occurred, covering voltage, current, DC link level etc	Instant fault tracking and date stamping, gives status of drive to enable rapid drive diagnostics
Energy efficiency counters	Works out energy savings of the application in kWh and MWh; the cost of the energy saved in a local currency; and the carbon dioxide (CO <sub>2</sub> ) emissions equivalent of the energy saved	Can assist with electricity billing in accordance with Part L2 Building Regulations. Allows verification of energy savings before making investments in capital equipment

\* For details of FlashDrop, see user interfaces (page 28)



For more details, please refer to Technical Catalogue 3AFE68295378

### Highlights

- Easy ordering
- Quick installation
- Rapid start-up, trouble-free use, easy interfacing
- Built in BACnet
- Wide power range in wall-mounted IP21 and IP54 variants
- Programmed with several HVAC applications, including supply and return fans, cooling tower fans, booster pumps and condensers.
- Intelligent HVAC control panel with clear text
- New energy monitoring features record energy, CO<sub>2</sub> and money saved (compared to equivalent DOL)

# ABB HVAC drive (for heating, ventilation & air conditioning industry)

ACH550 – Variants, ratings, types, voltages and prices

## ABB HVAC drive variants

### Wall-mounted - 0.75 kW - 160 kW, 380/480 V,

- Wall-mounted, frame sizes R1-R6
- 2 variants, IP21 and IP54
- 55 percent size reduction at 160 kW
- Built-in EMC filter (1st & 2nd environment)
- Standard software, easy to configure
- Built-in BACnet and Modbus interfaces
- Cable connection box
- Brake chopper in frame sizes R1-R2
- HVAC assistant control panel
- Built-in patented swinging choke
- Sensorless vector control, scalar control
- FlashDrop compatible
- RoHS compliant



### Free-standing - 160 - 355 kW, 380/480 V

- Free-standing, frame size R8
- IP21 as standard, very compact design
- Built-in EMC filter
- Standard software, easy to configure
- Built-in BACnet and Modbus interface
- Pedestal unit on wheels, easy handling
- HVAC assistant control panel
- Sensorless vector control, scalar control
- Free-standing units are not FlashDrop compatible
- Not RoHS compliant
- For dimensions and prices, please contact ABB



## Types, ratings and dimensions

### 380-480 V, 3-phase supply voltage

† Ratings Normal use		Frame	Fuse A	Heat dissipation W	Cooling requirements m³/h	Type (code shown is IP21, for IP54 add +B055)	IP21 list price without control panel*	IP54 list price without control panel*
P <sub>N</sub> kW	I <sub>2N</sub> A	A	Type gG					
0.75	2.4	R1	10	30	44	ACH550-01-02A4-4		
1.1	3.3	R1	10	40	44	ACH550-01-03A3-4		
1.5	4.1	R1	10	52	44	ACH550-01-04A1-4		
2.2	5.4	R1	10	73	44	ACH550-01-05A4-4		
3	6.9	R1	10	97	44	ACH550-01-06A9-4		
4	8.8	R1	10	127	44	ACH550-01-08A8-4		
5.5	11.9	R1	16	172	44	ACH550-01-012A-4		
7.5	15.4	R2	16	232	88	ACH550-01-015A-4		
11	23	R2	25	337	88	ACH550-01-023A-4	For prices on industry specific products please contact ABB's HVAC team	
15	31	R3	35	457	134	ACH550-01-031A-4		
18.5	38	R3	50	562	134	ACH550-01-038A-4		
22	45	R3	50	667	134	ACH550-01-045A-4		
30	59	R4	63	907	280	ACH550-01-059A-4		
37	72	R4	80	1120	280	ACH550-01-072A-4		
45	87	R4	125	1440	280	ACH550-01-087A-4		
55	125	R5	160	1940	350	ACH550-01-125A-4		
75	157	R6	200	2310	405	ACH550-01-157A-4		
90	180	R6	250	2810	405	ACH550-01-180A-4		
110	205	R6	250	3050	405	ACH550-01-195A-4		
132	245	R6a**	315	3260	405	ACH550-01-246A-4		
160	290	R6a**	315	3850	405	ACH550-01-290A-4		

Includes EMC Filter

\* Control panel is required for programming and set-up - see below

† Heavy duty ratings available, when higher overload requirements are needed - contact ABB

\*\* R6a is not an official frame size, it just designates slightly different dimensions

## 208/240 V, 3-phase supply voltage

3-phase 240 V is also available for customers supplying the North American market. Please enquire for details.

## Control panel for ACS550

Control panel	Type	Price
Assistant control panel	ACS-CP-A	£POA




# ABB general purpose drive and ABB HVAC drive

ACS550 and ACH550 – Dimensions, I/O and options

## Dimensions and weights

Frame size	IP21 / UL open					IP54 / UL type 12			
	H1 mm	H2 mm	W mm	D mm	Weight Kg	H mm	W mm	D mm	Weight Kg
R1	369	330	125	212	6.5	449	213	234	8.2
R2	469	430	125	222	9	549	213	245	11.2
R3	583	490	203	231	16	611	257	253	18.5
R4	689	596	203	262	24	742	257	284	26.5
R5	739	602	265	286	34	776	369	309	38.5
R6	880	700	300	400	69	924	410	423	80
R6a	986	700	302	400	73	1119	410	423	84

\*\* R6a not an official frame size, shown here to highlight the slightly different dimensions of the largest rating

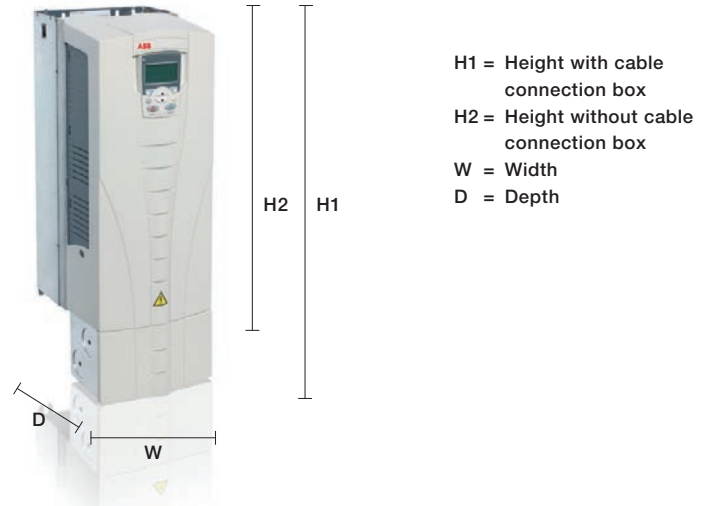

## Brake units and choppers technical data

Frequency converter input voltage	Resistor ohm	Continuous output W	Max. output 20 s W	Brake unit type code
200 - 240 V AC	32	2000	4500	ACS-BRK-C
380 - 480 V AC	32	2000	12000	ACS-BRK-C
200 - 240 V AC	10.5	7000	14000	ACS-BRK-D
380 - 480 V AC	10.5	7000	42000	ACS-BRK-D

## Chopper dimensions

Width (W) mm	Height (H) mm	Depth (D) mm	Weight kg	Brake unit type code
150	500	347	7.5	ACS-BRK-C
270	600	450	20.5	ACS-BRK-D


## Other available options ACS550 and ACH550

- IP54 protection class (frames R1-R6a)
- Encoder feedback option available
- For other options, please see the user interfaces on page 28


## Typical control connections ACS550 and ACH550

These connections are shown as examples only. Please refer to the User's Manual – macro section, for more detailed information and for different I/O configurations.

### Typical I/O connections ACS550

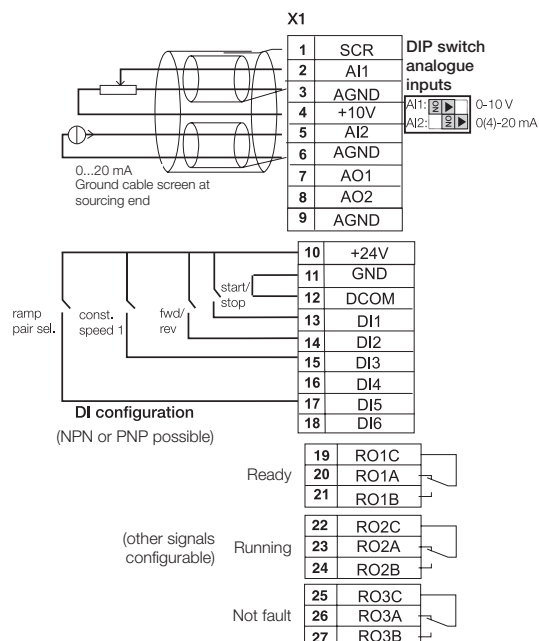

### Typical I/O connections ACH550

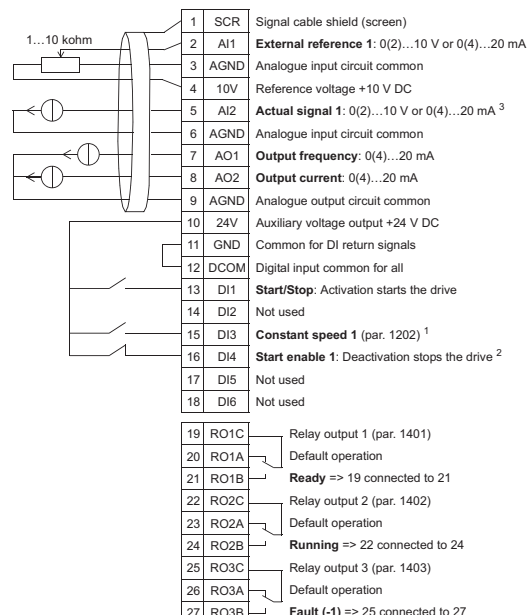


# ABB general purpose drive and ABB HVAC drive


ACS550 and ACH550 – User interfaces

## Assistant control panel


For easy drive programming, a detachable, multilingual alphanumeric Assistant control panel is offered as standard. The control panel has various assistants and a built-in help function to guide the user. It includes a real time clock, which can be used during fault logging and in controlling the drive, such as start/stop at certain times of the day. The control panel can be used for copying parameters for back-up or for downloading to another drive. A large graphical display and soft-keys make it extremely easy to navigate.

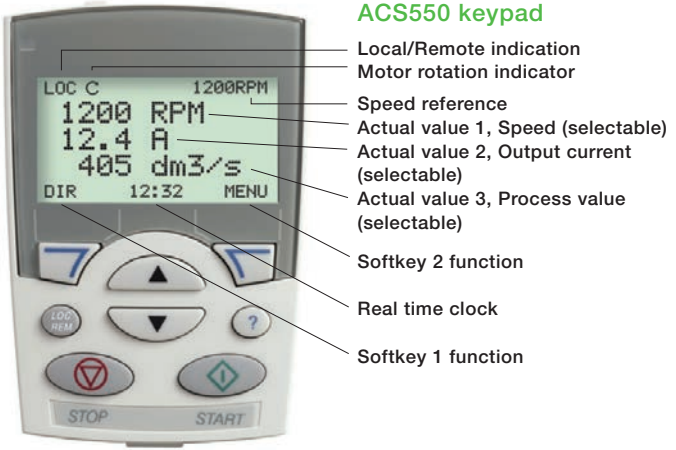

	ACS550	ACH550	Function
	Start	Hand	Initiates operation of motor control
	Stop	Off	Ceases operation of motor control
	Up	Up	Changes parameters and their value/ increases reference
	Down	Down	Changes parameters and their value/ decreases reference
	Loc/Rem	Auto	Changes drive state from local/hand control (control panel) to remote/auto control (I/O or other external source)
	HELP		Built-in "Help" button
	Softkey 1		Function changes according to state of panel
	Softkey 2		Function changes according to state of panel

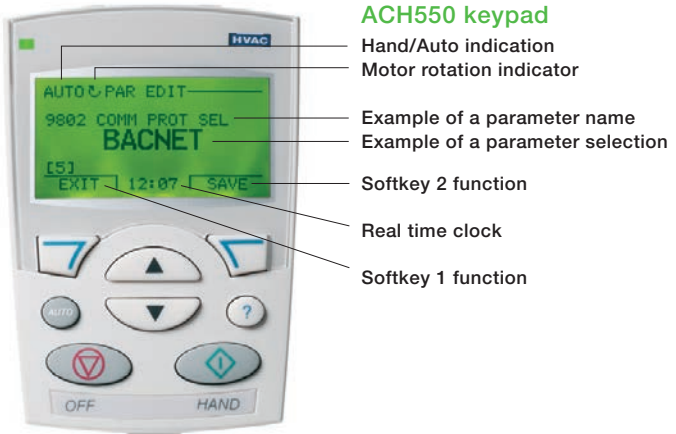

## Overview of ACS550 and ACH550 interfaces

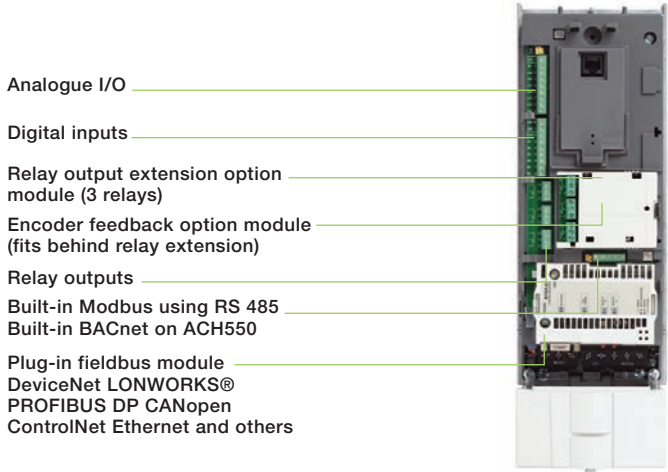

## Relay extension (+L511)

An extra 3 V free change-over relays can be added to the ACx550 by requesting an OREL module.

## Panel mounting kit, IP54 and IP66

The panel mounting kit enables mounting of control panels on cabinet doors. These kits include a 3 m extension cable, a gasket, mounting screws and a mounting template - two versions are now available, IP54 and IP66. The IP66 has an additional keypad membrane cover.

## FlashDrop

A powerful palm-sized tool for fast and easy parameter setting, ideal for programming many drives. Programming in the box - unpowered. Ideal for OEMs as programming can be left until the moment before commissioning, or at the end of the production line, making it a safe option.

## Fieldbus modules and fieldbus

An extensive range of fieldbus modules are available to allow connection to all the major industrial protocols. The drive has an RS485 Modbus interface built-in.

## DriveWindow Light PC tool

DriveWindow Light is a parameterisation and commissioning tool used to set-up and commission the drive. Monitoring and diagnostic facilities are included, as well as a local control panel. Wizards are included to guide the user through the most commonly performed tasks.

# ABB industry-specific drive for water and wastewater

0.37 kW to 500 kW, ACQ810

Motor control method – DTC

200/480 V, 3-phase supply, 0.37 kW - 500 kW



## What is an ABB industry-specific drive for water and wastewater?

The ABB industry-specific drive is designed for all of the applications commonly used in the water and wastewater industry. The specifically designed modules feature tailor-made pump control functions for single and multi-pump systems. These functions ensure smooth, disturbance-free operation of water and wastewater processes, maximising energy efficiency while reducing unnecessary downtime. The drives' pump-specific functions decrease the lifecycle cost of the pumping system, helping to save time and money. The power range has now been expanded with the introduction of the G1 and G2 frame sizes.

## Where can it be used?

The ABB industry-specific drive module can be used for most of the variable-speed applications contained within the water and wastewater industry, to optimise the system and to save energy. The modules are designed for cabinet assembly and are easily mounted side-by-side. Intelligent start-up assistants ensure that drive commissioning is straightforward. The functions needed for most pumping systems can be easily implemented with the pre-programmed macros. Starting up a pumping system and optimising its performance is extremely easy.

## Highlights

– Optimal pump control for various applications



For further information, see Technical Catalogue 3AUA0000055685

- Intelligent solution for controlling pump performance
- Remote monitoring and diagnostics
- Pump auto change
- Full multipump software now available
- Flow measurement included in the product, ideal for leak detection and a low cost
- Anti-rag pump cleaning algorithms
- Easy and cost-effective cabinet assembly
- Rapid and simple pumping system start-up
- Advanced energy efficiency in pumping systems
- Maximised process uptime
- Lifecycle support

## Main features

Feature	Advantage	Benefit
Direct torque control	Premium motor control platform	Lower losses, improved energy saving
Soft pipe filling	Provides a pump with a smooth build-up of flow in pipes	This avoids pressure peaks and reduces the stresses on weak or ageing water mains when demand changes
Pump cleaning or anti-jam	Used in wastewater pumping stations to prevent pump and pipe clogging and expensive maintenance activities	The function can be set to trigger against different commands e.g on each pump start; on monitoring if the pump is becoming blocked; in response to a digital input or PLC command. If the pump cleaning function runs too often, an alarm is raised
Flow calculation	The drive has a flow meter routine that very accurately determines the flow rate within a process	Avoids the need for costly external flow meters and is suitable for applications where the flow data is not needed for invoicing purposes
Level control	Used to effectively control the filling or emptying of water or wastewater storage tanks	Fast-ramp starting creates a flush effect to keep pipes clear. Users can define the "efficiency speed" based on the pumps best efficiency point
Multi-pump control	Optimal control of applications where several parallel pumps are operated together and the required flow rate is variable	Maintains stable process conditions optimising the speed and number of the pumps needed
Pump priority	Optimal control of applications where the consumption rate varies based on demand	Operate higher capacity pumps during daytime and smaller units at night. This allows pumps to be operated closer to their best efficiency point
Pump specific protection features	The protection functions indicate if the pre-defined process conditions change	Underload and overload functions are pre-defined across the speed range at five distinct points. Belt breaks or dry sumps can be detected
Safe torque-off	TÜV certified safely to SIL3	Remove contactor from MCC

# ABB industry-specific drive for water and wastewater

ACQ810 – Variants, ratings, types, voltages and prices



## ABB industry-specific drive variants

The ACQ810 is available in several frame sizes to optimise the packing density ensuring MCC cabinet line-ups are as compact as possible. Minimised MCC line-ups mean that compliant bids to the water industry are as small as possible whilst still complying with EMC and thermal requirements.

**Frame A and B** – EMC external but plug-in, so no extra cabling required. Drives can be horizontally mounted for smaller compartments.

**Frame C to E** – EMC and harmonics choke built into the unit, so most compact size with no extra items to fit or cable.

**Frame G1 and G2** – New high power design, mounted on wheels for easy manual handling. Removeable cabling boxes ensure power cables are fitted only once.

## 380/480 V, 3-phase supply voltage

Light overload $P_N$ kW	No overload use $I_{2N}$ A	$I_{cont. max}$ A	Max output A	Frame	Fuses A Type gG	Heat dissipation W	Cooling requirements m³/h	Type	MCC mounting kits	IP20 Price
1.1	2.7	3	4.4	A	6	100	24	ACQ810-04-02A7-4	+J410	
UL	3	3.6	5.3	A	6	106	24	ACQ810-04-03A0-4	+J410	
1.5	3.5	4.8	7	A	10	126	24	ACQ810-04-03A5-4	+J410	
2.2	4.9	6	8.8	A	10	148	24	ACQ810-04-04A9-4	+J410	
3	6.3	8	10.5	A	16	172	24	ACQ810-04-06A3-4	+J410	
4	8.3	10.5	13.5	B	16	212	48	ACQ810-04-08A3-4	+J410	To ensure ABB can tailor the drive to your needs, price on application
5.5	11	14	16.5	B	20	250	48	ACQ810-04-11A0-4	+J410	
7.5	14.4	18	21	B	25	318	48	ACQ810-04-14A4-4	+J410	
11	21	25	33	C	25	375	142	ACQ810-04-021A-4	+J410	
15	28	30	36	C	32	375	142	ACQ810-04-028A-4	+J410	
18.5	35	44	53	C	50	541	200	ACQ810-04-035A-4	+J410	
22	40	50	66	C	50	646	200	ACQ810-04-040A-4	+J410	
30	53	61	78	D	63	840	290	ACQ810-04-053A-4	+J410	
37	67	78	100	D	80	1020	290	ACQ810-04-067A-4	+J410	
45	80	94	124	D	100	1200	290	ACQ810-04-080A-4	+J410	
55	98	103	138	E0	125	1190	168	ACQ810-04-098A-4	+J410	
75	138	144	170	E0	160	1440	405	ACQ810-04-138A-4	+J410	
90	162	202	282	E	250	2310	405	ACQ810-04-162A-4	+J410	
110	203	225	326	E	250	2810	405	ACQ810-04-203A-4	+J410	
132	240	260	326	E	315	3260	405	ACQ810-04-240A-4	+J410	
160	286	290	348	E	315	4200	405	ACQ810-04-286A-4	+J410	
200	377	387	470	G1	<sup>Δ</sup> 630	4403	1200	ACQ810-04-377A-4	+J410 +H381	
250	480	500	560	G1	<sup>Δ</sup> 800	5602	1200	ACQ810-04-480A-4	+J410 +H381	
315	570	580	680	G1	<sup>Δ</sup> 1000	6409	1200	ACQ810-04-570A-4	+J410 +H381	
355	634	650	730	G1	<sup>Δ</sup> 1000	8122	1200	ACQ810-04-634A-4	+J410 +H381	
400	700	710	850	G2	<sup>Δ</sup> 1250	8764	1200	ACQ810-04-700A-4	+J410 +H381	
450	785	807	1020	G2	<sup>Δ</sup> 1400	9862	1200	ACQ810-04-785A-4	+J410 +H381	
500	857	875	1100	G2	<sup>Δ</sup> 1400	10572	1420	ACQ810-04-857A-4	+J410 +H381	

$I_{2N}$  - Nominal output current. 110% overload 1 min / 5 min.  $I_{cont}$  - Continuous rms output current with no overload capacity

UL = UL - NEMA rated motor - no IEC motor equivalent, however the current rating may be useful

<sup>†</sup> For fuse selection, refer to the hardware manual, weak networks may require aR fuses

<sup>Δ</sup> These fuses are aR type, gG fuses not recommended for this frame size



# ABB industry-specific drive for water and wastewater


ACQ810 – Dimensions, I/O and options



## Dimensions and weights

Frame size	Height <sup>1)</sup> mm	Depth <sup>2)</sup> mm	Width mm	Weight kg
A	364	219	94	3.3
B	380	297	101	5.4
C	567	298	166	15.6
D	567	298	221	21.3
E0	602	376	276	34
E	700	465	312	67
G	1,564	571	562	200
G1	1,462 (1,560)	505 (515)	305 (329)	161 (191)
G2	1,662 (1,710)	505 (515)	305 (329)	199 (229)

( ) = Dimensions with optional cable boxes




### Notes

All dimensions and weights are without options

- <sup>1)</sup> Height is the maximum measure without clamping plates. In A and B frames the external C3 EMC-filter adds 160mm to the height. (The EMC filter does not have to be plugged in, it can be sited nearby) EMC-filter is internal in frames C, D, E0 and G
- <sup>2)</sup> Total depth with control panel, 10mm less with keypad removed
- <sup>1) 2)</sup> These notes do not apply to the G1 and G2 frames

## Typical I/O connections

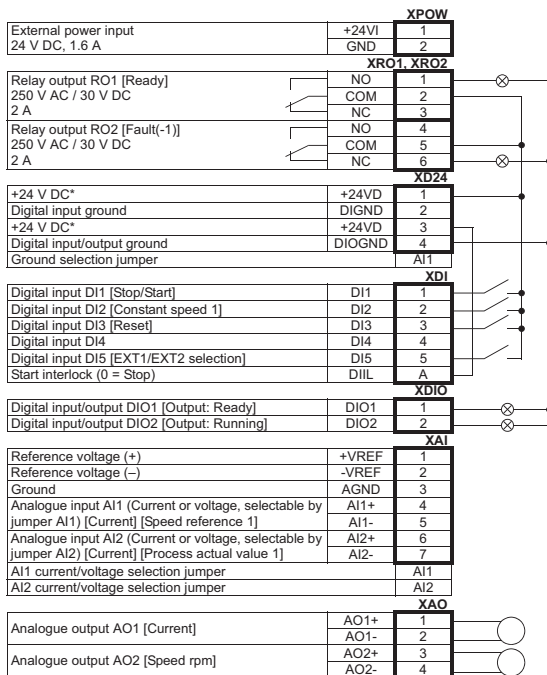

## Options


A number of control panel mounting options are available, to optimise MCC design. The drive is normally delivered with a control panel and holder fitted as standard. Other options include:

- No control panel at all
- Control panel door mounting kit
- No cover at all for the drive unit
- The new G1 and G2 frames can be ordered with cabling boxes (providing surrounding) which allow easier module removal

Other options for the ACQ810 include:

- Analogue I/O extension module
- Analogue and digital extension module
- Relay I/O extension module
- Extensive range of plug-in fieldbus modules
- External du/dt filters if required


## Typical STO and drive-to-drive link connections

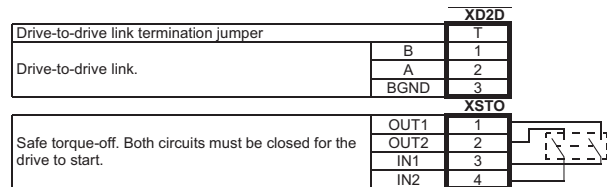

STO stands for safe torque-off and is certified by TÜV to SIL3 to IEC61508.

STO can be used to guarantee no mechanical rotation (no torque) at the shaft of the motor and thus allows MCC panels to be built without the need for the traditional contactor, where maintenance of the rotating machinery is a requirement. Electrical isolation will only be required for working on the drive or the electrical connections of the motor, so the traditional door isolator will suffice for that requirement.

## ACQ810 main connections overview

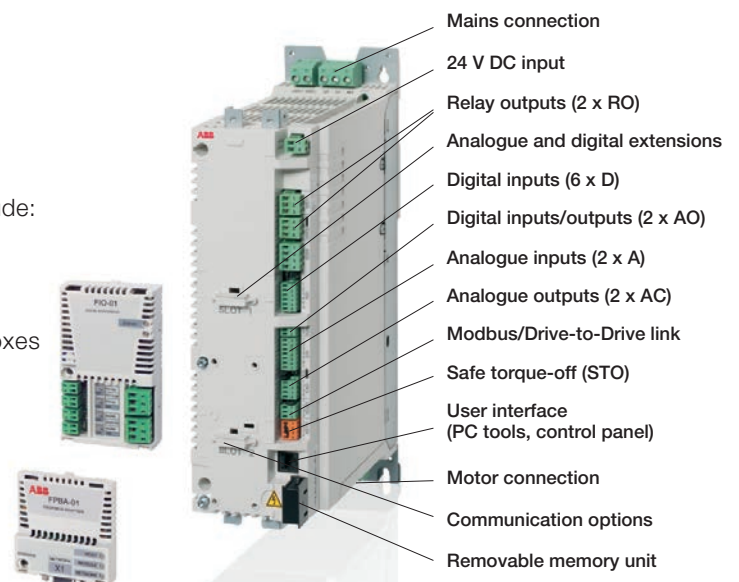




# ABB industry-specific drive for water and wastewater

ACQ810 – User interfaces

## Assistant keypad

For easy drive programming, a detachable, multilingual alphanumeric Assistant control panel is preferred as standard. The control panel has various assistants and a built-in help function to guide the user. It includes a real-time clock, which can be used during fault logging and in controlling the drive, such as start/stop. The control panel can be used for copying parameters for back-up or for downloading to another drive. A large graphical display and softkeys make it extremely easy to navigate.

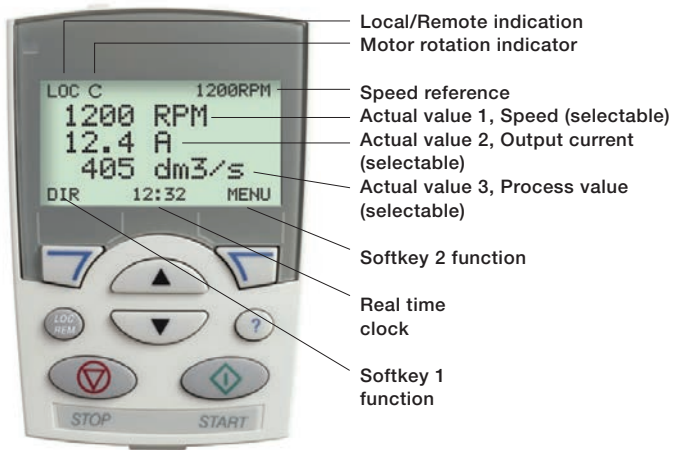

Name	Function
	Start Initiates operation of drive
	Stop Ceases operation of drive
	Up Changes parameters and their value/ increases reference
	Down Changes parameters and their value/ decreases reference
	Loc/Rem Changes drive state from local control (control panel) to remote control (I/O or other external source)
	HELP Built-in "Help" button
	Softkey 1 Function changes according to state of panel
	Softkey 2 Function changes according to state of panel

## Keypad door mounting platform

Designed to hold the keypad so that it can be attached to the MCC door. An IP54 variant is also available for higher IP requirements.



## Removable memory unit

The memory unit stores the complete parameter and firmware set for the drive. Should a drive need to be replaced, swapping the memory unit to the new drive will transfer a complete drive set-up – absolutely no recommissioning is required. This reduces down time in the event of a problem.



## Expansion for analogue and digital I/O

Additional I/O can be added to the ACQ810. This I/O can be addressed by the fieldbus so that the ACQ810 can be used as an I/O "nest", or of course the I/O can be used to simply allow more connectability from the process to the drive, for example, flow or level transducers.



## EMC filters – frames A and B

Pluggable EMC filters for frame sizes A and B can be plugged directly into the drive, or can be mounted next to the drive on the end of a plug and socket cable – easy to install and mount.

## Fieldbus interfaces

Extensive range of plug-in fieldbus interfaces, allowing connection to Profibus, DeviceNet, CanOpen, Modbus RTU and Ethernet.



## DriveStudio PC tool

DriveStudio is a parameterisation and commissioning tool used to set-up and commission the water and wastewater drive. Monitoring and diagnostic facilities are included, as well as a local control panel. Wizards are included to guide the user through the most commonly performed tasks.

## DriveSPC PC tool

DriveSPC (Solution Program Composer) allows access to the extended programming area of the ACQ810. Application specific IEC 61131 solution programmes can be generated and stored inside the drive. This way the drive can be tailored to the application and fully utilise the extended I/O.

# ABB industrial drive

**0.55 kW to 2,800 kW, ACS800**

Motor control method - DTC

208/240 V, 3-phase, powers dependent on range

380/415 V, 3-phase, powers dependent on range

380/500 V, 3-phase, powers dependent on range

525/690 V, 3-phase, powers dependent on range



## What is an ABB industrial drive?

ABB industrial drives are highly flexible AC drives that can be customised to meet the precise needs of many industrial applications. The drives cover a wide range of powers and voltages, including voltages up to 690 V. ABB industrial drives can be built in a number of differing formats: wall mounted, free standing, cabinet, industrial kits, multidrives or liquid cooled. This section describes the most popular styles. Page 41 describes other variants. Order-based customisation is an integral part of the offering.



## Where can it be used?

The ABB industrial drive is equipped with the premium motor control platform, DTC, and as such is ideally suited for the most demanding industrial applications, like high performance centrifuges as well as constant torque applications such as cranes, winders, hoists, extruders and heavy conveyors. Applications with high breakaway torque, like rubber mixers and highly precise applications like paper machines and engine dynamometers are easily handled. The drive has ATEX certification with ABB's Ex d, Ex de, Ex nA and Ex tD motors and has marine certification for Lloyds, DNV and ABS.

## Highlights

- Build-to-order product can be tailored for the needs of the application
- Blanket ATEX certification (Ex) with ABB motors
- Specialised software variants for selected applications
- Adaptive programming - like having a small PLC inside
- Common user and process interface with fieldbus
- Common software tools for sizing and commissioning
- 6-pulse, 12-pulse, low harmonic, 4Q, air-cooled, water-cooled, flange mounting
- Innovative hardware variants
- DTC (direct torque control) superior motor performance
- Flexibility to programme more advanced applications

## Main features

Feature	Advantage	Benefit
Direct torque control (DTC)	Full torque at zero speed without encoder Accurate speed and torque control	Consistently excellent performance ensures that drive is not the limiting factor in process
Built-to-order	Customer can specify a wide range of options and build variants. Loaded with application specific software	Always meets application needs, tailored for the customer
Adaptive programming	Small PLC inside your drive as standard. 15 programmable function blocks. Up to 200 blocks by loading 'multiblock'	Needs no additional hardware or PC tool Adapt the drive to the specific needs of the project
Dedicated software loading packages	Industry specific software, fully researched, factory written and fully supported e.g. crane, winder, winch etc	Solve the application with very little effort
Application macros	Popular I/O configurations, pre-written sets	Fast settings for many applications
Brake choppers (where ordered)	Brake chopper fits internally (smaller space)	Reduced costs, high performance, internal monitoring No additional space or installation time needed
Safe torque-off option	TÜV approved safety feature SIL2/PL d	Satisfies the need for latest machinery directive (when ordered)
Low peak volts and du/dt	Motor peak voltage and rate of rise meets IEC 60034-17	Kind to motor windings
Compact size	Contains EMC filter and harmonic chokes inside the drive	No extra space or cabling is needed
Cooling fan	Silent long-lifetime cooling fan that switches on and off	Reduced maintenance, time and running costs
EMC	2nd environment RFI filters as standard 1st environment optional	No need for additional external filtering, additional space, or additional cabling between drives and filter
Fieldbus gateway	Snap-on module that is easily mounted inside drive	Automation system independent of drive company
I/O	Extensive and flexible standard and expansion I/O provides additional analogue or digital connections	No need for additional space or cabling
Start-up assistant	Guides user through all essential settings without going to parameter list	Easy set-up of parameters, your own language, on-line info system always available
Huge range of hardware variants	Special variants for wall, cabinet mount, 4Q, low harmonic, pre-built cabinets, drive kits, water-cooled	There is always an ABB industrial drive variant that fits the specification and requirements
Liquid cooled drives	Most compact fully enclosed drive on the market Fully certified for marine use	Low losses to control room, low noise, totally enclosed for harsh environments

# ABB industrial drive

ACS800 – Variants, ratings, types, voltages and prices



## Wall-mounted single drives

### Series ACS800-01

- 0.55 kW - 160 kW, (230 - 690 V)
- 55 percent size reduction at 160 kW
- IP21 as standard, IP55 as option
- Wide range of built-in options
- Optional cable box for SWA cables
- Coated boards and internal I/O options
- Built-in brake chopper
- EMC filter for 1st environment, restricted distribution according to EN 61800-3 - optional
- EMC filter for 2nd environment, unrestricted distribution according to EN 61800-3 - standard
- Internal fieldbus options
- ACS800-01 is type tested for marine applications
- Blanket certification with ABB ATEX motors



For further information, see Technical Catalogue 3AFE 68375126 EN

**380, 400 or 415 V, 3-phase supply voltage. The power ratings are valid at nominal voltage (400 V)**

No-overload use		Light overload		Heavy-duty use		Max output	Frame	Fuse A	Heat dissipation	Cooling requirements	Type (+E200 to EMC filter +E210 for R6 frame)	IP21 Price with keypad	IP55 Price with keypad
P <sub>cont. max</sub> kW	I <sub>cont. max</sub> A	P <sub>N</sub> kW	I <sub>N</sub> A	P <sub>hd</sub> kW	I <sub>hd</sub> A	A		†Type gG	W	m <sup>3</sup> /h			
1.5	5.1	1.5	4.7	1.1	3.4	6.5	R2	10	100	35	ACS800-01-0003-3	£1,089	£1,279
2.2	6.5	2.2	5.9	1.5	4.3	8.2	R2	10	120	35	ACS800-01-0004-3	£1,132	£1,322
3	8.5	3	7.7	2.2	5.7	10.8	R2	10	140	35	ACS800-01-0005-3	£1,210	£1,400
4	10.9	4	10.2	3	7.5	13.8	R2	16	160	35	ACS800-01-0006-3	£1,373	£1,563
5.5	13.9	5.5	12.7	4	9.3	17.6	R2	16	200	35	ACS800-01-0009-3	£1,515	£1,705
7.5	19	7.5	18	5.5	14	24	R3	20	250	69	ACS800-01-0011-3	£1,693	£1,947
11	25	11	24	7.5	19	32	R3	25	340	69	ACS800-01-0016-3	£1,944	£2,198
15	34	15	31	11	23	46	R3	40	440	69	ACS800-01-0020-3	£2,260	£2,514
22	44	18.5	41	15	32	62	R4	50	530	103	ACS800-01-0025-3	£2,687	£3,024
30	55	22	50	18.5	37	72	R4	63	610	103	ACS800-01-0030-3	£3,070	£3,407
37	72	30	69	22	49	86	R5	80	810	250	ACS800-01-0040-3	£3,358	£3,720
45	86	37	80	30	60	112	R5	100	990	250	ACS800-01-0050-3	£4,057	£4,419
55	103	45	94	37	69	138	R5	125	1190	250	ACS800-01-0060-3	£4,767	£5,129
75	145	75	141	45	100	170	R5	160	1440	405	ACS800-01-0075-3	£5,116	£5,478
90	166	75	155	55	115	202	R6	200	1940	405	ACS800-01-0100-3	£6,502	£7,092
110	202	90	184	75	141	282	R6	224	2310	405	ACS800-01-0120-3	£7,691	£8,281
110	225	110	220	90	163	326	R6	250	2810	405	ACS800-01-0135-3	£7,825	£8,415
132	260	132	254	110	215	326	R6	315	3260	405	ACS800-01-0165-3	£9,582	£10,172
160	290	160	285	132	234	351	R6a	315	4200	405	ACS800-01-0205-3	£11,303	£11,893

† For fuse selection, refer to the hardware manual, weak networks may require aR fuses

Prices include 2nd environment EMC filter and control panel

Other ratings and voltages are available, 230 V, 500 V, 690 V. Price on application

R6a frame denotes a slightly different physical dimension

# ABB industrial drive

## ACS800-01 – Dimensions and options



### Dimensions and weights


Frame size	IP21					IP55			
	H1 mm	H2 mm	W1 mm	Depth mm	Weight kg	H mm	W mm	Depth mm	Weight kg
R2	405	370 <sup>1)</sup>	165	226	9	528	263	241	16
R3	471	420 <sup>1)</sup>	173	265	14	528	263	273	18
R4	607	490 <sup>1)</sup>	240	274	26	774	377	278	33
R5	739	602 <sup>1)</sup>	265	286	34	775	377	308	51
R6	880	700 <sup>1)</sup>	300	399	67	923	420	420	77
R6a	977	700 <sup>1)</sup>	300	399	70	923	420	420	77

H1 = Height with cable connection box

H2 = Height without cable connection box

R6a shown to highlight different dimensions only

<sup>1)</sup> ACS800-01 without cable connection box does not fulfil IP21 requirements

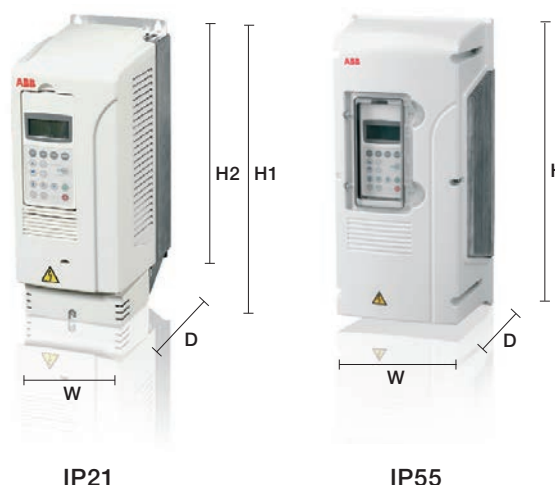

### Options for ACS800-01

ACS800-01 is a wall mounted drive, so the options fit inside:

- IP55 variant
- UK gland box to accommodate SWA cable
- Different levels of EMC compliance
- SIL2/PL d safe torque-off interface (unit mounts outside the drive)
- Coated boards
- Extended warranty
- Marine certification mounts and kits

All ABB industrial drives use the same common options and user interfaces. These are detailed on page 43.

- The drive has two slots for I/O and fieldbus expansion and one optical interface slot (an additional mother board can also be added – giving three more slots)
- I/O modules can be chosen from analogue expansion, digital expansion, encoder and resolver feedback options
- Fieldbus modules are always fixed to slot 1 and all of the major industrial fieldbus modules are available

- The drive can be ordered with specially designed application specific software variants. There are 17 variants available. For example, crane, master-follower, winder control, etc. The advantage of selecting these pre-written software variants, is that they have been written to cover the market requirements, they are tested and certified by the factory and come complete with a user manual and cabling instructions.

### User interfaces

Please refer to page 43 for details of the ACS800 common user interfaces.



# ABB industrial drive

ACS800 – Variants, ratings, types, voltages and prices



## Single drive modules for cabinets

### Series ACS800-04 and ACS800-04M

- Specifically designed for system integration
- 0.55 kW - 1,900 kW (230 V - 690 V)
- IP00 kits or IP20 modules depending on frame size
- R1-R6 frames are back sheet mounted; R7 and R8 stands on cabinet floor; R8i wheels into the cabinet
- Easy access to power terminals: plug connections on wheeled D4 and R8i units
- Side-by-side mounting (excl. versions with side exit)
- Extensive, programmable I/O with galvanically isolated inputs
- Three I/O and fieldbus extension slots inside
- ACS800-04M can be ordered as disassembled kit of parts to optimise the items purchased (R7 and R8 frames)
- Rittal assembly kits available for easy cabinet integration
- Service 'skateboard' for R7, R8 frames

The R7 and R8 modules are detailed below, please contact ABB for information on the other frame sizes shown here.



For further information, see Technical Catalogue 3AFE68404592

## 380, 400 or 415 V, 3-phase supply voltage. The power ratings are valid at nominal voltage (400 V)

No-overload use		Light overload		Heavy-duty use		Max output	Frame	Fuse A	Heat dissipation	Cooling requirements	Type	IP00 Price
P <sub>cont. max</sub>	I <sub>cont. max</sub>	P <sub>N</sub>	I <sub>N</sub>	P <sub>hd</sub>	I <sub>hd</sub>	A		†Type gG	W	m <sup>3</sup> /h	(+E210, +J400 and +J410 to order EMC and keypad)	with keypad*
kW	A	kW	A	kW	A							
110	206	110	202	90	163	326	R7	250	3000	540	ACS800-04-0140-3	£7,043
132	248	132	243	110	202	404	R7	315	3650	540	ACS800-04-0170-3	£8,551
160	289	160	284	132	240	432	R7	315	4300	540	ACS800-04-0210-3	£10,080
200	445	200	440	160	340	588	R8	500	6600	1220	ACS800-04-0260-3	£11,965
250	521	250	516	200	370	588	R8	630	7150	1220	ACS800-04-0320-3	£13,821
315	602	315	590	250	477	840	R8	630	8100	1220	ACS800-04-0400-3	£15,711
355	693	355	679	315	590	1017	R8	800	8650	1220	ACS800-04-0440-3	£17,820
400	720	400	704	355	635	1017	R8	800	9100	1220	ACS800-04-0490-3	£20,299

Other ratings and voltages available on application, 230 V, 500 V, 690 V

Drive can be purchased pre-assembled or as a disassembled kit, where parts can be omitted for cost optimisation by panel builders (R7, R8 frames)

Price includes 2nd environment EMC filter, control panel and door mounting kit  
Multiple control panel mounting options - please ask.

\* Comes with keypad and a door mount kit (+J400, +J410)

† For fuse selection, refer to the hardware manual. Weak networks may require aR fuses

## Dimensions and weights

Frame size	Bookshelf mounting				Flat-type mounting			
	H mm	W mm	D mm	Weight kg	H mm	W mm	D mm	Weight kg
R7	1121	427 <sup>†</sup>	473	100	1152	632	259	100
R8	1564	562 <sup>†</sup>	568	205	1596	779	403	205

<sup>†</sup> R7 module only 250mm wide, R8 module only 350mm wide

## Options for ACS800-04

When purchased as an ACS800-04, the kit always contains pedestal, busbars, power module, control module and keypad. If purchased as an ACS800-04(M) then it is possible to tailor the offering, remove busbars, have left or right handed or flat or bookcase orientation.



## User interfaces

Please refer to page 43 for details of the ACS800 common user interfaces.





### Cabinet-built drives (air- and liquid-cooled)

#### Series ACS800-07

- 45 kW - 2,800 kW, (380 - 690 V)
- IP21 as standard, IP22, IP42, IP54 and IP54R as options
- Up to 500 kW based on a single module including rectifier and inverter
- Above 500 kW separate rectifier and inverter modules that have plug-in power connectors for easy maintenance and redundancy. Modules wheel-in and -out of cabinet
- 6- or 12-pulse operation as standard (>500 kW)
- Extremely compact, internal swinging gate for control options
- Factory-built cabinet with EMC and thermally type-tested for trouble-free operation
- Extensive range of standard options
- ATEX approved PTC interfaces and blanket certification with ABB motors
- TÜV approved emergency stopping options



For further information, see Technical Catalogue 3AFE68375126

The ACS800-07 cabinet drive range covers an extensive power and options range. The drives shown in the table are for the basic IP21 build format and only up to 400 kW. Please contact ABB to discuss the exact requirements of your factory built and certified cabinet, to ensure all relevant options are catered for.

#### Liquid-cooled option

ACS800-07 can also be supplied in a liquid cooled format, ACS800-07LC, please refer to page 41 for details.

### 380, 400 or 415 V, 3-phase supply voltage. The power ratings are valid at nominal voltage (400 V)

No-overload use		Light overload		Heavy-duty use		Max output	Frame	Fuse A	Heat dissipation	Cooling requirements	Type	Price
P <sub>cont. max</sub>	I <sub>cont. max</sub>	P <sub>N</sub>	I <sub>N</sub>	P <sub>hd</sub>	I <sub>hd</sub>	A		† Type aR	W	m³/h		
kW	A	kW	A	kW	A							
75	145	75	141	45	100	170	R5	315	1440	405	ACS800-07-0075-3	
90	166	75	155	55	115	202	R6	315	1940	405	ACS800-07-0100-3	
110	202	90	184	75	141	282	R6	400	2310	405	ACS800-07-0120-3	
110	214	110	220	90	163	326	R6	500	2570	405	ACS800-07-0135-3	
132	260	132	254	110	215	326	R6	550	3260	405	ACS800-07-0165-3	
160	290	160	285	132	234	351	R6	550	4200	405	ACS800-07-0205-3	
200	445	200	440	160	340	588	R8	800	6600	1220	ACS800-07-0260-3	
250	521	250	516	200	370	588	R8	1000	7150	1220	ACS800-07-0320-3	
315	602	315	590	250	477	840	R8	1250	8100	1220	ACS800-07-0400-3	
355	693	355	679	315	590	1017	R8	1400	8650	1220	ACS800-07-0440-3	
400	720	400	704	355	635	1017	R8	1400	9000	1220	ACS800-07-0490-3	

Other ratings and voltage ranges available, 230 V, 500 V, 690 V.

Price on application

Includes 2nd environment EMC filter and control panel and can include many other factory fitted options

† For fuse selection, refer to the hardware manual

ABB panels can be ordered with a wide range of standard options. Price on application



### Dimensions and weights, cabinet built (air-cooled)

Frame size	*Width with fuse switch	Height IP 21/22/42	Height IP54	Depth	*Depth top entry/exit	Weight (kg) with line fuse switch
R5/R6	430	2130	2315	645	646	300
R8	830	2130	2315	646	646	500

ACS800-07 can be supplied with an extensive range of standard cabinet options. Contact your ABB representative for details

\*some of these options alter the cabinet dimensions

Higher power standard and bespoke cabinets can be quoted on request

### Options for ACS800-07

ACS800-07 is a cabinet drive, so its options fit inside the cabinet. The cabinet drive can be fitted with:

- IP21, 22, 42, 54, 54R variants (no IP55)
- Emergency stop variants, TÜV approved
- Motor thermistor relays
- ATEX-approved motor protection
- Marine construction
- UL approved components
- Various types of cable markings, cabinet heaters, door furniture and lighting etc.
- Sine filter fitted to output (for older motors)
- Top or bottom cable entry for either motor or power cables
- UK gland plates for SWA cables
- 110 V control inside the cabinet
- Different levels of EMC compliance
- Extended warranty
- Additionally, ABB can accommodate any specialised option or feature by using its in-house application design team

ACS800-07 also comes with options that are fitted to the drive module which is inside the cabinet:

- SIL2 safe torque-off interface
- Coated boards



Larger powers are built with D4 and R8i modules. Ratings and dimensions available on request.

### User Interfaces

All ACS800s use the same common options and user interfaces. These are detailed on page 43

- The drive has two slots for I/O and fieldbus expansion and one slot for an optical interface (an additional mother board can also be added – giving three more slots)
- I/O modules can be chosen from analogue expansion, digital expansion, encoder and resolver feedback options
- Fieldbus modules are always fixed to slot 1 and all of the major industrial fieldbus modules are available
- The drive can also be ordered with specially designed application specific software variants. There are 11 variants available, for example, crane, master follower, winder control, etc. The advantage of selecting these pre-written software variants is that they have been written to cover the market requirements, they are tested and certified by the factory, and come complete with a user manual and cabling instructions.

# ABB industrial drive

ACS800 – Variants, ratings, types, voltages and prices



## Low harmonic, active rectifier drives

### Wall-mounted and cabinet-built

A dedicated range of low harmonic drives based on active rectifier technology. No regenerative capability ensures no mistakes on generator supplies, still retaining a low 2-4 percent total harmonic distortion (THD) signature.


### Series ACS800-31, wall-mounted

- 5.5 kW - 110 kW (230 - 690 V)
- IP21 as standard
- Single package for easy cabinet installation, reducing installation time and cabinet space


### Series ACS800-37, cabinet-built

- Power range from 37 kW to 2700 kW (230 to 690 V)
- IP21 as standard; IP22, IP42, IP54 and IP54 R available as options
- Wheel-out power modules for improved manual handling
- Plug-in power connectors for easy maintenance and redundancy
- Power module redundancy for improved availability
- Factory-built cabinets ensure good installation

The R5 and R6 modules are detailed below. Please contact ABB if you require higher powers. Also, fully regenerative products are available called ACS800-11 and ACS800-17. Please refer to page 41 for more information.

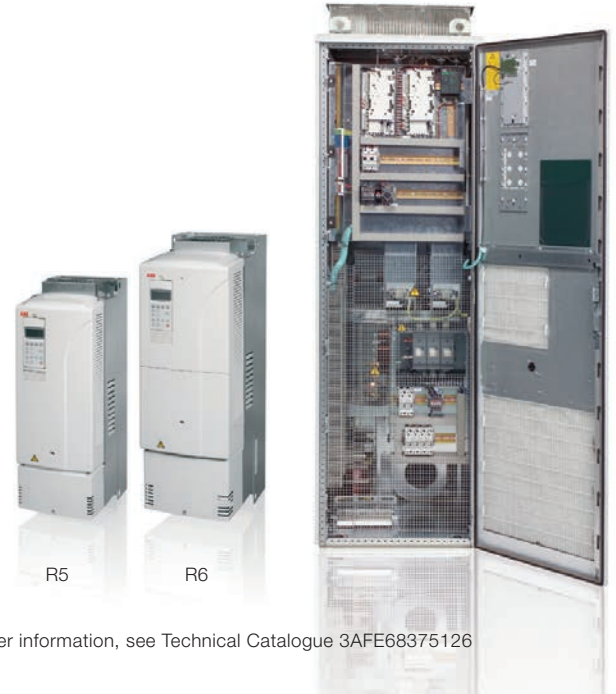

For further information, see Technical Catalogue 3AFE68375126

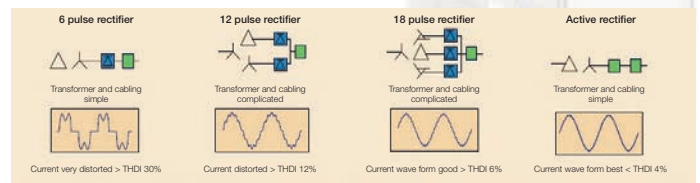

Alternatives in reducing line harmonics

## Low harmonic, wall-mounted drives - ACS800-31

380, 400 or 415 V, 3-phase supply voltage. The power ratings are valid at nominal voltage (400 V)

No-overload use		Light overload		Heavy-duty use		Max output	Frame	Fuse	Heat dissipation	Cooling requirements	Type	IP21 Price
P <sub>cont. max</sub>	I <sub>cont. max</sub>	P <sub>N</sub>	I <sub>N</sub>	P <sub>hd</sub>	I <sub>hd</sub>	A		A	W	m <sup>3</sup> /h	(+E200 to order the EMC filter)	with keypad
kW	A	kW	A	kW	A			†Type gG				
15	34	15	32	11	26	52	R5	40	550	350	ACS800-31-0016-3	£3,998
18.5	38	18.5	36	15	34	61	R5	40	655	350	ACS800-31-0020-3	£4,481
22	47	22	45	18.5	38	68	R5	50	760	350	ACS800-31-0025-3	£5,091
30	59	30	56	22	45	90	R5	63	1000	350	ACS800-31-0030-3	£5,836
37	72	37	69	30	59	118	R5	80	1210	350	ACS800-31-0040-3	£6,874
45	86	45	83	30	65	137	R5	100	1450	350	ACS800-31-0050-3	£8,159
55	120	55	114	45	88	168	R6	125	1750	405	ACS800-31-0060-3	£9,350
75	150	75	143	55	117	234	R6	160	2350	405	ACS800-31-0070-3	£10,871
90	165	75	157	75	132	264	R6	200	2800	405	ACS800-31-0100-3	£12,489

Other ratings and voltage ranges available, 230 V, 500 V, 690 V. Price on application.

Price includes 2nd environment EMC filter and control panel

Prices for low harmonic cabinet drives ACS800-37 also available on application

† For fuse selection, refer to the hardware manual. Weak networks may require aR fuses



### Dimensions and weights, ACS800-31

Frame size	Height mm	Width mm	Depth mm	Weight kg
R5	816	265	390	62
R6	970	300	440	100

Height includes cable box, one enclosure, no external items

### Options for ACS800-31, wall-mounted

- UK gland box to accommodate SWA cable
- Different levels of EMC compliance
- SIL2 safe torque-off interface (unit mounts outside the drive)
- Coated boards standard
- Extended warranty
- Marine certification mounts and kits

### Options for ACS800-37, cabinet-built

Being cabinet drive, all of the options available for ACS800-31 are also valid, as they fit inside the cabinet. Additionally the cabinet drive can be fitted with:

- IP21, IP22, IP42, IP54, IP54R variants (no IP55)
- Emergency stop variants
- Motor thermistor relays
- ATEX-approved motor protection
- Marine construction
- UL approved components
- Various types of cable markings, cabinet heaters, door furniture and lighting etc.
- Sine filter fitted to output (for older motors)
- Top or bottom cable entry for either motor or power cables
- UK gland plates for SWA cables
- 110V control inside the cabinet
- Additionally, ABB can accommodate any specialised option or feature, by using its in-house application design team

ACS800-37 also comes with options that are fitted to the drive module which is inside the cabinet

- SIL2/PL d safe torque-off interface
- Coated boards



Ratings and dimensions for larger variants available on request.

### User interfaces

All ACS800s use the same common options and user interfaces, these are detailed on page 43.

- The drive has two slots for I/O and fieldbus expansion and one slot for an optical interface (an additional mother board can also be added – giving three more slots)
- I/O modules can be chosen from analogue expansion, digital expansion, encoder and resolver feedback options
- Fieldbus modules are always fixed to slot one, and all of the major industrial fieldbus modules are available
- The drive can also be ordered with specially designed application specific software variants. There are 11 variants available in all, for example, crane, master follower, winder control, etc. The advantage of selecting these pre-written software variants is that they have been written to cover the market requirements. They are tested and certified by the factory and come complete with a User Manual and cabling instructions.

# Other industrial drives from ABB



## Regenerative, active rectifier drives

### Series ACS 800-11, wall-mounted


- 5.5 kW to 110 kW (230 - 690 V)
- IP21 as standard
- Active rectifier unit
- Single package for easy cabinet installation, reducing installation time and cabinet space

### Series ACS800-17, cabinet-built

- 45 kW - 2,500 kW (230 - 690 V)
- IP21 as standard, IP22, IP42, IP54 and IP54 R available as options
- Wheel-out power modules for improved manual handling
- Plug-in power connectors for easy maintenance and redundancy
- Power module redundancy for improved availability
- Factory-built cabinets ensure good installation and compliance with standards
- ATEX approved PTC interfaces and blanket certification with ABB motors



For further information see Technical Catalogue 3AFE 68375126

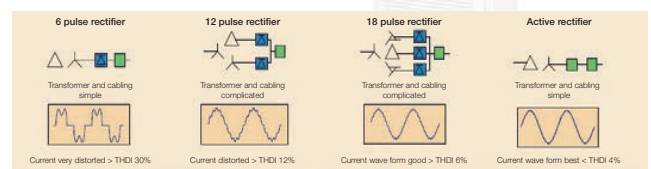

Alternatives in reducing line harmonics

## Regenerative, active rectifier drive modules - low harmonic

### Series ACS800-14

- 75 kW - 1700 kW (380 - 690 V)
- IP00 kits
- Assembly kits for Rittal cabinets and generic cabinets
- Separate controllers for galvanic isolation
- Requires a separate +24 V DC supply at 3 A
- Active supply unit can be configured for low harmonic mode (2-4 percent harmonic distortion) or regenerative mode, for better dynamic performance
- Comprehensive installation instructions and CAD drawings



For further information see Technical Catalogue 3AFE 68404592

## Liquid cooled modules

### Series ACS800-x04LC

- Extremely compact size, compared to air-cooled
- 98 percent of drive losses transferred to liquid - removes the need for air conditioned control rooms
- Tested electrical/mechanical kits available - which make different solutions easy to build
- ACAD, PDF and full 3D EPLAN® modelling support
- Pre-designed mounting frames available to reduce design time
- Liquid / liquid-heat exchanger assemblies can be supplied by ABB
- Module features:
  - Diode supply modules include line side chokes
  - Inverter modules include du/dt filters
  - Easy structure, fewer components
  - Inverter units, IGBT supply units and dynamic braking units are based on one common R8i module



For further information see Technical Catalogue 3AFE68404592



# Other industrial drives from ABB



## Multidrives

A multidrive is a custom-made cabinet to suit a larger application or a process line. The cabinet contains multiple inverter stages of differing size, supplied from a common DC bus. The DC bus can be provided by a selection of supply units, diode, thyristor or IGBT (active supply unit).

### Series ACS800 multidrive cabinets

- 1.5 kW - 5,600 kW, 380 - 690 V
- IP21 as standard, IP22, IP42 and IP54 as option
- Smaller power modules have high packing density, using a patented mounting arrangement
- Power modules on wheels for easy manual handling
- Plug-in power connectors for easy maintenance and redundancy
- Wide range of built-in options, including brake choppers, EMC filters, fuse switches, contactors, communication options etc
- ATEX approved PTC interfaces and blanket certification with ABB motors
- TÜV approved emergency stops



For further information see ACS800 Technical Catalogue 3AFE 68248531

### Series ACS800 multidrive modules

- A range of IP20 module and IP00 kits to generate bespoke multidrive systems built into system integrators own panels
- Modules have no rectifiers, they are inverters only and range in frames from R2i to R8i (i=inverter only)
- Selection of rectifiers available to generate DC link for system. Diode, thyristor or active rectifier are available
- Cabinet kits for Rittal and generic, ensure easy integration
- ACAD, PDF and full 3D EPLAN® modelling support



For further information see Technical Catalogue 3AFE68404592

## Liquid-cooled drives

### Series ACS800 - 17LC and ACS800 - 37LC

- 37 kW - 2,700 kW, (380-690 V)
- IP42 as standard, IP54 as option
- ACS800 - 17LC, fully regenerative, ACS800 - 37LC, low harmonic
- Provides reliable operation in adverse conditions
- Silent and safe operation without the need for air ventilation or air conditioning, fully enclosed cabinets, smaller than previous generation
- Extensive range of cabinet options, including water pumping and heat exchanger cabinets
- Marine enclosure available
- Parallel modules allow redundant configuration
- Ideal where space is limited, in harsh environments, or at sites that require quieter operation, in applications where cooling water is freely available
- IEC, UL, CSA, Lloyds, DNV, ABS approvals
- ATEX-approved PTC interfaces and blanket certification with ABB motors



For further information see Technical Catalogue 3AFE68375126

# ABB industrial drive

ACS800 – Common user interfaces



## Control panel

The control panel features a full-text multilingual display. Dedicated keys allow fast access to actual signals, parameters, assistant functions and drive information. The panel can be used for parameter copying and for configuring adaptive programmes, working as a PLC inside the drive. Local motor control and parameter copying is also possible.



## Panel mounting kits

Kits are available that allow mounting on the cabinet door, or in a holder inside the cabinet. The panel can be screwed to the cabinet door, without the need for an additional holder.



## Fieldbus

The ACS800 supports an extensive list of fieldbus modules for connectivity to industrial networks.



## I/O expansion

ACS800 can be fitted with a large range of analogue and digital I/O modules to expand its I/O capability.



## DriveWindow - PC Tool

DriveWindow is a high specification, high speed commissioning, maintenance and monitoring tool for the ACS800 drive range. It operates over an optical fibre link. (Drive requires an RCDO module)


## DriveAP - PC Tool

DriveAP allows access to the ACS800 adaptive, block programming environment.

## Typical I/O and control connections

The ABB industrial drive family uses the same control card, keypad and software structure throughout its entire range. Analogue and digital I/O channels are used for different functions such as control, monitoring and measurement purposes (e.g. motor temperature). In addition, optional I/O extension modules are available providing additional analogue or digital I/O connections.

Below are the standard drive control I/O of the ABB industrial drive with factory macro. For other ACS800 application macros the functions may be different. Please refer to the firmware manual for details.

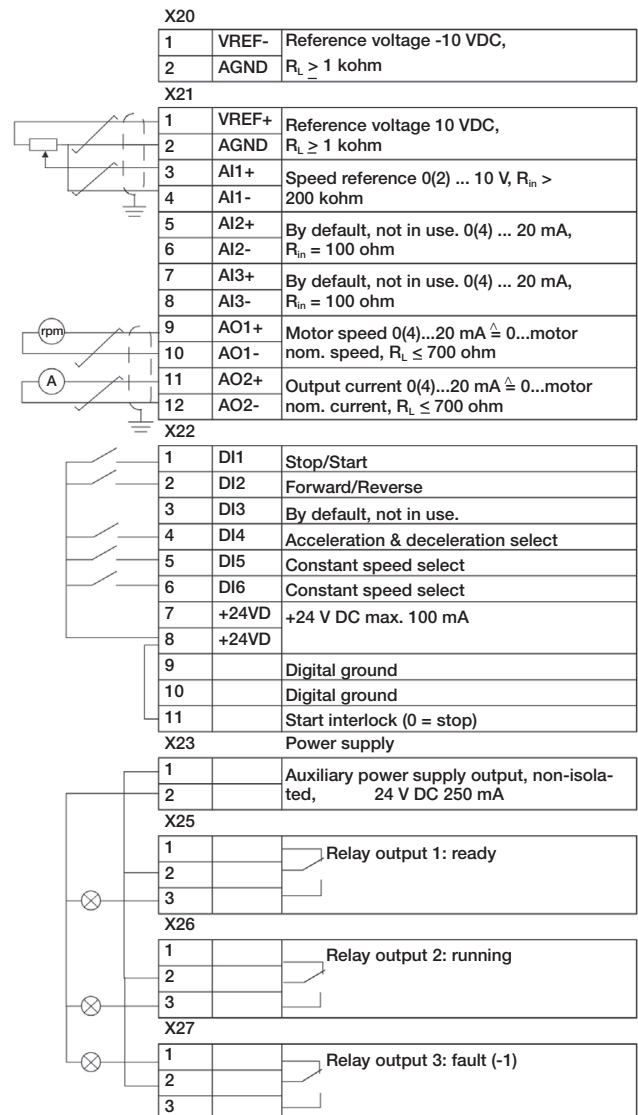

# Next generation of ABB industrial drive - coming soon

## 0.55 kW to 250 kW, ACS880

Motor control method – DTC or Scalar

208 / 240 V, 3-phase supply, powers dependent on range

380 / 415 V, 3-phase supply, powers dependent on range

380 / 500 V, 3-phase supply, powers dependent on range

525 / 690 V, 3-phase supply, powers dependent on range



### What is the next generation ABB industrial drive?

The highly successful ACS800 range of drives have been completely redesigned and updated to form the next generation all-compatible range. The drive contains a new harmonised parameter set, taking its features from all of the best functions within the existing ABB drive's family, making it process compatible. The drive is programmed by the most intuitive and user-friendly keypad ABB has produced to date and a new PC tool has been designed to incorporate all of the latest functionality that new operating systems bring, including a free-of-charge entry level version, making it compatible with all user types. The drive also contains the very latest 4th generation DTC motor control core, making the drive all compatible with any motor available in the market today, asynchronous, permanent magnet, and synchronous reluctance (SynRM) are all controllable by the same software platform. Energy saving functions make it environmentally compatible as well.



### Main features

Feature	Advantage	Benefit
Direct torque control (DTC)	Full torque at zero speed without encoder Accurate speed and torque control	Consistently excellent performance ensures that drive is not the limiting factor in the process
Intuitive modern keypad	High contrast, high definition display giving intuitive access to the drive parameters	Easy commissioning, programming, maintenance and fault finding
Start-up assistant	Guides user through all essential settings without going to parameter list	Easy set-up of parameters, your own language, on-line information system always available
Removable memory unit	Programme, parameter edits, motor calibrations and fault histories stored in the removable memory unit	Zero re-commissioning in case of drive failure, just move the memory unit, very short MTTR
Integrated, patented, TÜV approved safety module option	No need to use external programmable safety hardware for drive specific functions. The module carries out drive specific safety functionality more efficiently than external programmable devices, as they are designed to work directly with the drive. Patented safety monitoring functions allow the drive to undertake speed related safety functions with no additional speed feedback devices needed	Minimise installation time and space. Shorter design times using TÜV approved module. Drive specific safety functions save time and money as they are built in, and do not require additional speed monitoring devices to operate
Modern PC tools	Entry level (FOC) and pro level PC tools are available for commissioning, tuning, parameter management and monitoring	Keep copies of the parameters for back-up. Use the PC tools to optimise the application
Fieldbus gateway	Snap-on module that is easily mounted inside drive	Access to all major automation platforms
I/O extension modules	Additional I/O can be added to the drive	Easy addition of extra I/O to allow the drive to control the application properly
Speed feedback modules	A large array of high performance speed feedback devices can be interfaced to the drive via these modules	Higher performances can be achieved or position control can be undertaken
Energy monitoring and optimising features	Drive controls the motor voltage dependant on the load. Drive monitors the saved energy compared to equivalent DOL operation	Consumed energy optimised across the speed and load range. Energy savings presented in local currency and tonnes of CO <sub>2</sub>
Drive-to-drive link	Built-in industrial control link	Built-in ability to undertake master-follower applications with no extra hardware

# Next generation of ABB industrial drive - coming soon

## What is the next generation ABB drive? (cont)

The drive contains energy saving features like speed controlled cooling fans, energy optimising and monitoring software features, making the drive compatible with the environment as well.

New innovations include built-in machinery safety functionality with functions like safe torque-off (STO) to SIL 3 PL e as standard. Other more complicated solutions can be realised with the plug-in safety functions module (see page 51 for more details). As with the existing ABB industrial drive range the next generation drives can be built in a number of differing formats: wall mounted, cabinets, industrial kits or multidrives. The range is growing as ABB increase this product offering, so please ask which variants are available to ensure the range covers your requirements. Meanwhile the existing ABB Industrial drive will remain fully available and current, remaining in production for some years ahead.

## Where can it be used?

The next generation ABB industrial drive is equipped with the 4th generation premium motor control platform, DTC, and as such is ideally suited for the most demanding industrial applications. Constant torque and torque at zero speed is perfect from the DTC core.

Suitable applications include cranes, winders, hoists, extruders and heavy conveyors. Applications with high breakaway torque, like rubber mixers and highly precise applications like paper machines and engine dynamometers will be easily handled. The new motor control platform also allows control of every major AC motor type (including SynRM), so many and varied applications are possible.

## Highlights – ACS880

- Built to order product can be tailored for the needs of the application
- Highly intuitive high contrast and high resolution keypad suitable for gloved hands
- Built-in safety functionality to satisfy the demands of IEC 62061 and ISO 13849-1
- Removable memory unit
- Flexibility to programme more advanced applications
- Common user and process interface with fieldbus
- Common software tools for sizing and commissioning
- Innovative hardware variants
- DTC (direct torque control) superior motor performance
- Energy efficiency counters
- Energy optimiser – optimises the motor control for the application
- Load analyser for optimised dimensioning of the drive, motor and process





# Next generation of ABB industrial drive - coming soon

ACS880 – Variants, ratings, types, voltages and prices



## Wall-mounted single drive

### Series ACS880-01

- 0.55 kW - 250 kW, (208 - 690 V)
- Largest power wall-mounted drive on market
- Coated boards as standard
- TÜV approved safe torque-off (STO) to SIL 3 PL e standard
- IP21 as standard, IP55 as option
- IP55 variant same footprint as IP21 variant
- Brake chopper standard to R4 frame, option thereafter
- Wide range of built-in options
- Optional UK cable box option for SWA cables
- EMC filter for C3 category according to EN 61800-3 (2004) standard – category C2 optional
- Internal fieldbus options
- Optional safety module
- Optional I/O expansion
- ACS880 user interfaces described later



For further information, see Technical Catalogue 3AUA0000098111

## 380/480 V, 3-phase supply voltage. The power ratings are valid at nominal voltage (400 V)

No-overload (nominal) use		Light-duty use		Heavy-duty use		Max output	Frame	Fuse A	Heat dissipation	Cooling requirements	Type	Price
P <sub>N</sub> kW	I <sub>N</sub> A	P <sub>Ld</sub> kW	I <sub>Ld</sub> A	P <sub>hd</sub> kW	I <sub>hd</sub> A	A		† Type gG	W	m <sup>3</sup> /h		
0.75	2.4	0.75	2.3	0.55	1.8	3.1	R1	4	30	44	ACS880-01-02A4-3	When the product is launched pricing will be available. Please contact ABB at that time.
1.1	3.3	1.1	3.1	0.75	2.4	4.1	R1	6	40	44	ACS880-01-03A3-3	
1.5	4.0	1.5	3.8	1.1	3.3	5.6	R1	6	52	44	ACS880-01-04A0-3	
2.2	5.6	2.2	5.3	1.5	4.0	6.8	R1	10	73	44	ACS880-01-05A6-3	
3.0	7.2	3.0	6.8	2.2	5.6	9.5	R1	10	94	44	ACS880-01-07A2-3	
4.0	9.4	4.0	8.9	3.0	7.2	12.2	R1	16	122	44	ACS880-01-09A4-3	
5.5	12.6	5.5	12.0	4.0	9.4	16	R1	16	172	44	ACS880-01-12A6-3	
7.5	17	7.5	16	5.5	12.6	21	R2	25	232	88	ACS880-01-017A-3	
11	25	11	24	7.5	17	29	R2	32	337	88	ACS880-01-025A-3	
15	32	15	30	11	25	42	R3	40	457	134	ACS880-01-032A-3	
18.5	38	18.5	36	15	32	54	R3	50	562	134	ACS880-01-038A-3	
22	45	22	43	19	38	64	R4	63	667	134	ACS880-01-045A-3	
30	61	30	58	22	45	76	R4	80	907	280	ACS880-01-061A-3	
37	72	37	68	30	61	104	R5	100	1117	280	ACS880-01-072A-3	
45	87	45	83	37	72	122	R5	100	1120	280	ACS880-01-087A-3	
55	105	55	100	45	87	148	R6	125	1295	435	ACS880-01-105A-3	
75	145	75	138	55	105	178	R6	160	1440	435	ACS880-01-145A-3	
90	169	90	161	75	145	247	R7	^315	1940	450	ACS880-01-169A-3	
110	206	110	196	90	169	287	R7	^315	2310	450	ACS880-01-206A-3	
132	246	132	234	110	206	350	R8	^350	3300	550	ACS880-01-246A-3	
160	293	160	278	132	246*	418	R8	^400	3900	550	ACS880-01-293A-3	
200	363	200	345	160	293	498	R9	^550	4800	1150	ACS880-01-363A-3	
250	430	250	428	200	363**	545	R9	^630	6000	1150	ACS880-01-430A-3	

\*130% overload, \*\*125% overload

† For fuse selection, refer to the hardware manual. Weak networks may require aR fuses

^ These fuses are aR fuses, ABB does not recommend gG fuses on these larger drives



# Next generation of ABB industrial drive - coming soon

ACS880-01 – Dimensions and options



## Drive dimensions and weights wall mounted drives


Frame size	Height 1 IP21 (mm)	Height 2 IP21 (mm)	Width (mm)	Depth (mm)	Weight (kg)
R1	405	370	155	226	6
R2	405	370	155	249	8
R3	471	420	172	261	10
R4	573	490	203	274	18.5
R5	730	596	203	274	23
R6	726	569	251	357	45
R7	880	600	284	365	55
R8	963	681	300	386	70
R9	955	680	380	413	98

H1 - Height with cable entry box

H2 - Height without cable entry box

Width and depth with cable entry box

Frame size	Height 1 IP55 (mm)	Width IP55 (mm)	Depth IP55 (mm)	Weight IP55 (kg)
R1	450	162	292	6
R2	450	162	315	8
R3	525	180	327	10
R4	576	203	344	18.5
R5	730	203	344	23
R6	726	252	421	45
R7	880	284	423	55
R8	963	300	446	70
R9	955	380	496	98

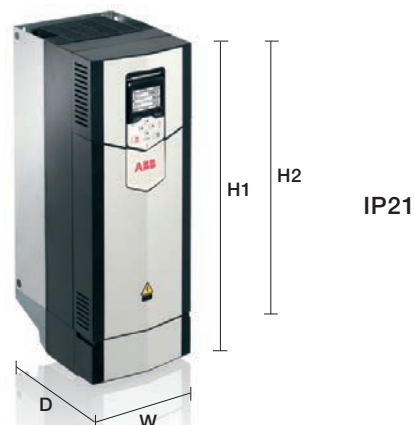

## Options for ACS880-01

ACS880-01 is a wall-mounted drive, so all of the options fit inside:

- IP55 variant
- Extensive range of expansion I/O options
- Extensive range of motor feedback devices
- Extensive range of fieldbus options
- Built-in safety option module, TÜV approved
- UK gland box to accommodate SWA cable
- Different levels of EMC compliance
- Extended warranty

All ABB industrial drives use the same common options and user interfaces. These are detailed on page 51.

- The IP55 variant has been designed to occupy the same physical space as the IP21 unit, thus minimising wall space required to support this module.
- The drive has three slots for I/O and fieldbus expansion and one drive-to-drive serial communication link.
- I/O modules can be chosen from analogue expansion,

- digital expansion, encoder and resolver feedback options
- Fieldbus modules can be connected to any slot and all of the major industrial fieldbus modules are available. The drive also support two fieldbus modules at a time, so can control via a traditional industrial fieldbus, but data gather via an Ethernet based protocol
- Remote monitoring modules can be employed to monitor the drive over the web
- The safety module occupies a separate dedicated connection point ensuring safety integrity
- The drive is operated and commissioned either from a keypad or from a PC tool. The PC tool used with ACS880 is Drive Composer

## User interfaces for ACS880-01

Please refer to page 51 for details of the ACS880 common user interfaces.

# Next generation of ABB industrial drive - coming soon

ACS880 – Variants, ratings, types, voltages and prices



## Cabinet-built single drive

### Series ACS880-07

- 45 kW - 250 kW, (380 - 500 V)
- IP21 as standard, IP42 and IP54 as options
- 250 kW based on a single module including rectifier and inverter
- Coated boards as standard
- TÜV approved safe torque-off (STO) to SIL 3 PL e standard
- TÜV approved emergency stopping options
- Extremely compact, internal swinging gate for control options minimises cabinet size, but ensures easy access
- Internal customer wiring is redesigned to give easier access, with plugable connectors included
- Drive module can be extracted using a set of maintenance rails
- Factory-built cabinet with EMC and thermally type-tested for trouble-free operation
- Extensive range of standard options, that are increased to incorporate the most popular engineered options ordered with the ACS800 range
- Optional UK cable option for SWA cables
- Optional motor thermistor and PTC connections
- Internal fieldbus options
- Optional safety module
- Optional I/O modules
- ACS880 user interfaces described later



For further information, see Technical Catalogue 3AUA0000098111

## 380 to 480 V, 3-phase supply voltage. The power ratings are valid at nominal voltage (400 V)

No-overload (nominal) use		Light-duty use		Heavy-duty use		Max output	Frame	Fuse A	Heat dissipation	Cooling requirements	Type	Price
$P_N$	$I_N$	$P_{Ld}$	$I_{Ld}$	$P_{hd}$	$I_{hd}$	A		† Type aR	W	m³/h		
kW	A	kW	A	kW	A							
55	105	55	100	45	87	148	R6	160	1795	435	ACS880-07-0105A-3	ABB panels can be ordered with a wide range of standard options. Price on application once the ACS880 is launched
75	145	75	138	55	105	178	R6	250	1940	435	ACS880-07-0145A-3	
90	169	90	161	75	145	247	R7	250	2440	450	ACS880-07-0169A-3	
110	206	110	196	90	169	287	R7	315	2810	450	ACS880-07-0206A-3	
132	246	132	234	110	206	350	R8	400	3800	550	ACS880-07-0246A-3	
160	293	160	278	132	246*	418	R8	500	4400	550	ACS880-07-0293A-3	
200	363	200	345	160	293	498	R9	630	5300	1150	ACS880-07-0363A-3	
250	430	250	428	200	363**	545	R9	700	6500	1150	ACS880-07-0430A-3	

\*130% overload, \*\*125% overload

† For fuse selection, refer to the hardware manual

ABB recommends the use of aR fuses for their cabinet drives, other fuses could be used if their melting curve matches ABB's recommendations

# Next generation of ABB industrial drive - coming soon

## ACS880-07 – Dimensions and options

### Dimensions and weights, cabinet-built drives

Frame size	Height 1 IP22/42 (mm)	Height 2 IP54 (mm)	Width (mm)	Depth (mm)	Weight (kg)
R6	2145	2315	430	673	240
R7	2145	2315	430	673	250
R8	2145	2315	430	673	265
R9	2145	2315	830	698	375

Note: these are the dimensions of the basic cabinet, dimensions will change with the addition of some options

### Options for ACS880-07

ACS880-07 is a cabinet built drive, so its options fit inside the cabinet. The cabinet drive can be fitted with:

- IP21, IP42, IP54, variants (no IP55)
- Emergency stop variants, TÜV approved
- Motor thermistor relays
- Marine construction
- UL approved components
- Various types of cable markings, cabinet heaters, door furniture and lighting etc.
- Top or bottom cable entry for either motor or power cables
- UK gland plates for SWA cables
- 110 V control inside the cabinet
- Different levels of EMC compliance
- Extended warranty
- Additionally, ABB can accommodate any specialised option or feature by using its in-house application design team

ACS880-07 comes with options that are fitted to the drive module which is inside the cabinet:

- The drive module has three slots for I/O and fieldbus expansion and one drive-to-drive serial communication link.
- I/O modules can be chosen from analogue expansion, digital expansion, encoder and resolver feedback options
- Fieldbus modules can be connected to any slot and all of the major industrial fieldbus modules are available. The drive also supports two fieldbus modules at a time, so can control, via a traditional industrial fieldbus, but data gathers via an Ethernet-based protocol



- Remote monitoring modules can also be employed to monitor the drive over the web
- The safety module occupies a separate dedicated connection point ensuring safety integrity
- The drive is operated and commissioned either from a keypad or from a PC tool. The PC tool used with ACS880 is Drive Composer.

### User interfaces for ACS880-07

Please refer to page 51 for details of the ACS880 common user interfaces

# Other next generation ABB industrial drives - coming soon



## ABB multidrive

A multidrive is a custom-made cabinet to suit a larger application or a process line. The cabinet contains multiple inverter stages of differing size, supplied from a common DC bus.


ABB can provide a ready-made cabinet, or it can provide system integrators with a comprehensive range of power modules and mechanical kits to build bespoke cabinets for end clients.

## Series ACS880 multidrive cabinets

- 1.5 kW - 250 kW
- IP21 as standard IP42 as option
- High packing density with 16 inverter units (up to frame size R2i) can be installed into one 1000 mm cabinet
- Diode bridge that is highly reliable with high power density
- Fast connectors for motor cables in the bottom part of the cabinet making installation easy
- Integrated safety including safe torque-off (STO) as standard with several safety functions as options
- Coated boards as standard
- Braking options
- DC fuse disconnectors, DC fuses or DC fuse switch including charging circuit for inverters
- Cabinet light and heater options
- Highly efficient thermal handling as heat loss of each inverter unit is guided to the back of the cabinet. All cabinets are their own separate compartment
- Long lifetime capacitors and high efficiency cooling fan with speed or on-off control
- TÜV approved emergency stops
- ACS880 user interfaces described later

## Series ACS880 multidrive modules

- 1.5 kW - 250 kW
- A range of IP20 modules and IP00 kits to generate bespoke multidrive systems built into system integrators own panels
- Modules have no rectifiers, they are inverters only and range in frames from R2i to R8i (i=inverter only)
- Inverter modules contain internal pre-charge circuits making them easier to integrate
- Inverter modules are extremely compact, making cabinet line-ups extremely compact and competitive
- Selection of rectifiers available to generate DC link for the system. Diode style are currently available
- New style diode module (DxD) only contains diodes, making it more competitively priced and more reliable
- Cabinet kits ensure easy integration
- Integrated safety including safe torque-off (STO) as standard with several safety functions as options using the new safety module
- Coated boards as standard
- ACS880 user interfaces described later

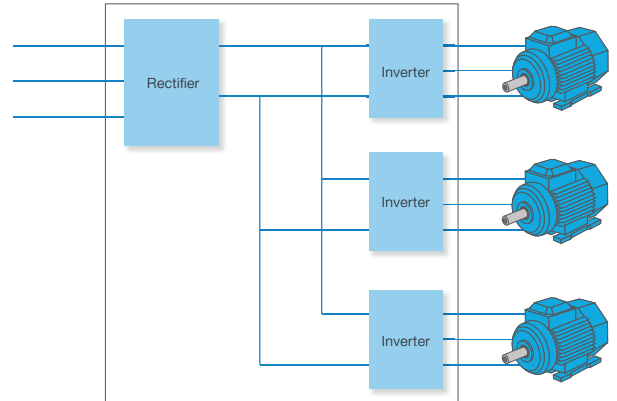

For further information, see Technical Catalogue 3AUA0000115037



For further information, see Technical Catalogue 3AUA0000115038



# Next generation ABB industrial drives - coming soon

ACS880 – Common user interfaces






## New control panel

State of the art high resolution keypad brings a new level of usability to the drives marketplace. The keypad has been designed by industrial designers to ensure maximum usability and intuitive use. The keypad display is extremely high definition and is visible in any control room. Innovative views, transitions and screen will be very familiar to users of smartphone technology. The display supports graphics and icons to help the user navigate. The keypad also supports text editing to allow users to re-name fault messages to match plant specific actions. Customer specific start-up images and parameter favourite's lists make the keypad easily tailor-able to customers and OEM's alike.



High resolution, high contrast display

Multiple display screens supporting graphs, bar graphs and graphical meters



Icon driven Menu selections and displays



Real time clock

USB connection – no special leads required

## Removable memory unit

The memory unit stores the complete parameter and firmware set for the drive. Should a drive need to be replaced, swapping the memory unit to the new drive will transfer a complete drive set-up – absolutely no recommissioning is required. This reduces down time in the event of a problem.



## Safety module, FSO-11

SIL3 rated TÜV approved safety module fits within the drive, to offer drive specific safety functions. Safely Limited Speed (SLS), Safe Maximum Speed (SMS), Safe Stop Emergency (SSE), Safe Stop 1 (SS1) / stop category 1 and Safe Brake Control (SBC) can be realised with no encoder feedback required (patent pending).



## Fieldbus

The ACS800 supports an extensive list of fieldbus modules for connectivity to industrial networks. These modules are common with other drives within the ABB drives range.



## Expansion for analogue and digital I/O

Additional I/O can be added to the ACQ810. This I/O can be addressed by the fieldbus so that the ACQ810 can be used as an I/O “nest”, or of course the I/O can be used to simply allow more connectability from the process to the drive, for example, flow or level transducers.



## Drive Composer PC tool

Drive Composer is the new PC tool for the ACS880 family. The PC tools come in 2 variants – the “Entry” level is a free of charge point to point tool and allows simple parameter editing and storage, as well as monitoring and commissioning support, while the “Pro” level has all of this as well as animated control diagrams and extended commissioning, monitoring and diagnostic support, as well as the ability to program the safety functions. The Pro tool also allows the user to connect to multiple drives either over “panel bus” where the keypad port is used, or over Ethernet.




# Other next generation ABB industrial drives - coming soon

## ACS880 – Common user interfaces

### Typical I/O and control connections

The ABB industrial drive family uses the same control card, keypad and software structure throughout its entire range. All I/Os are fully configurable to be whatever function is required. The diagram shows a typical I/O connection.

The ACS880 uses macros to configure its I/O. The macros pre-define the I/O functionality to comply with popular industrial configurations. It is also possible to configure the I/O manually to any function required.

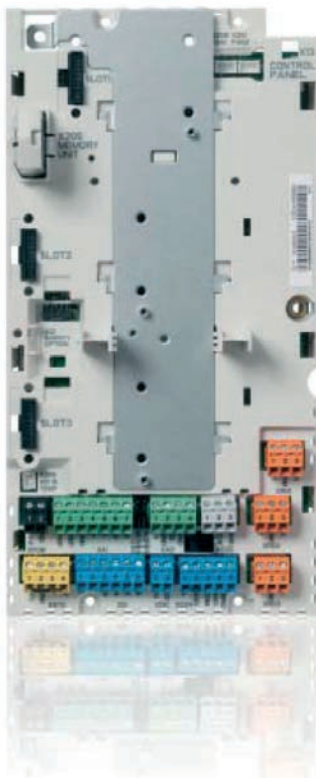

The ACS880 control card showing the colour coded terminal strips

	XPOW		External power input	
	1	+24VI	24 V DC, 2 A	
	2	GND		
	XAI		Reference voltage and analogue inputs	
	1	+VREF	10 V DC, $R_L$ 1 to 10 kohm	
	2	-VREF	-10 V DC, $R_L$ 1 to 10 kohm	
	3	AGND	Ground	
	4	AI1+	<b>Speed reference</b> 0(2) to 10 V, $R_{in} > 200$ kohm By default not in use. 0(4) to 20 mA, $R_{in} > 100$ ohm	
	5	AI1-		
	6	AI2+		
7	AI2-			
J1	J1	AI1 current/voltage selection jumper		
J2	J2	AI2 current/voltage selection jumper		
	XAO		Analogue outputs	
	1	AO1	<b>Motor speed rpm</b> 0 to 20 mA, $R_L < 500$ ohm	
	2	AGND		
	3	AO2	<b>Motor current</b> 0 to 20 mA, $R_L < 500$ ohm	
4	AGND			
	XD2D		Drive-to-drive link	
	1	B	Drive-to-drive link or built-in Modbus	
	2	A		
	3	BGND	Drive-to-drive link termination switch	
	J3	J3		
	XRO1, XRO2, XRO3 Relay outputs			
	1	NC		<b>Ready</b> 250 V AC/30 V DC 2 A
	2	COM		
	3	NO		
	1	NC		<b>Running</b> 250 V AC/30 V DC 2 A
2	COM			
3	NO			
1	NC		<b>Faulted (-1)</b> 250 V AC/30 V DC 2 A	
2	COM			
3	NO			
	XD24		Digital interlock	
	1	DIIL	By default not in use	
	2	+24VD	+24 V DC 200 mA	
	3	DICOM	Digital input ground	
	4	+24VD	+24 V DC 200 mA	
	5	DIOGND	Digital input/output ground	
J6	Ground selection switch			
XDIO		Digital input/outputs		
1	DIO1	Output: Ready		
2	DIO2	Output: Running		
	XDI		Digital inputs	
	1	DI1	Stop (0)/Start (1)	
	2	DI2	Forward (0)/Reverse (1)	
	3	DI3	Reset	
	4	DI4	Acceleration and deceleration select	
	5	DI5	Constant speed 1 (1=On)	
6	DI6	By default not in use		
	XSTO		Safe torque-off	
	1	OUT1	Safe torque-off. Both circuits must be closed for the drive to start.	
	2	SGND		
	3	IN1		
	4	IN2		
X12	Safety functions module connection			
X13	Control panel connection			
X205	Memory unit connection			

# ABB machinery drives and ABB motion control drives

## ABB motion control solutions

ABB offers an extensive range of machine control solutions for diverse industrial applications such as labelling, packaging, bottling, pick and place, laser cutting/trimming, stacking, cut-to-length, flying shear, web feeders and high speed rotary wrappers.

ABB's motion control solutions include human-machine interfaces (HMI), programmable logic controllers (PLC) and safety technology. Solutions extend to multi-axis motion controllers, high performance servo drives, rotary servo motors and linear motors. All of which seamlessly interface to provide a complete machine control solution.

With global representation and established proven technology ABB helps manufacturers reduce energy consumption, increase equipment up-time, minimise maintenance and increase productivity.

## ABB machinery drive modules

### Series ACS850-04

- New higher powered module. Integral wheels and shrouding
- Optimal power frame sizes and side-by-side mounting
- Power in at top, motor out at bottom for logical cable management within the cabinet
- DC bus connection - common DC link schemes are possible
- Integrated brake chopper - choppers in each module can be used when on a DC link, to distribute braking
- DTC motor control platform
- DriveStudio and DriveSPC PC tools for customising the parameter driven drive with IEC61131 application coding and software application blocks
- Memory module contains the complete firmware, parameter and programme set-up – no re-commissioning
- STO, safe torque-off to SIL3/PL e as standard
- Modules which compliment the full range of multidrive modules

## ABB motion control drive

### Series ACSM1

- For demanding machinery applications
- One drive for all motor types
- For synchronous and induction motors
- Adaptable design with modular, compact hardware
- Memory unit for easy drive management and re-commissioning
- Wide range of feedback interfaces
- Solution programming to extend drive functions, DriveStudio (IEC 61131 compatible)
- Modular and compact design, includes the functionality needed for the application
- Safe torque-off (SIL3 rated), TÜV approved



For technical information see Technical Catalogue 3AKA0000068580



For further information see Technical Catalogue 3AUA0000041481



For more details, please refer to Technical Catalogue 3AFE68675073



# Medium voltage AC drives

315 kW to 35 MW



## What is a medium voltage AC drive?

ABB offers a complete range of medium voltage AC drives for speed and torque control and for the starting of large AC motors. The drives, which are built with reliable IGCT power semiconductor technology, are available as complete package solutions including transformers and motors.

### Series ACS1000i

- Single drives 315 kW to 2000 kW
- Air-cooled, 24-pulse drive with integrated input transformer
- Retrofit-ready for existing motors, suitable for most MV applications
- Integrated output sine filter for pure sinusoidal voltage and current output
- Offshore cabinet versions available

### Series ACS1000

- Single drives from 315 kW to 5 MW
- Air-cooled (315 kW to 2 MW) and water-cooled (2 kW to 5 MW) versions
- Retrofit-ready for existing motors, suitable for most MV applications
- Integrated output sine filter for pure sinusoidal voltage and current output
- Offshore cabinet versions available

### Series ACS2000

- Single drives from 250 kW to 2.6 MW
- Active rectifier unit or 24-pulse diode front end for minimal line side harmonics
- Regeneration and power factor correction with active rectifier
- Direct-to-line versions for operation without an input transformer
- Multilevel topology allows the use of standard motors
- Simple drive system integration
- Modular power modules for reduced MTTR
- Sine filter output optional, for retrofit and long cable run applications

### Series ACS5000

- Single drives from 1.5 MW to 35 MW
- Air-cooled (1.5 MW to 6 MW) and water-cooled (4.5 MW to 35 MW) versions
- Air-cooled version with integrated input transformer (1.5 MW to 4.1 MW)
- Multilevel topology allows the use of standard motors
- Multilevel fuseless topology results in a drive with unbeatable efficiency, reliability and footprint
- Optimal network friendliness due to 36-pulse configuration





# Medium voltage AC drives and low voltage DC drives



## Medium voltage drives cont...

### Series ACS6000

- Single or multidrives 3 MW to 27 MW
- Active rectifier unit available for 4-quadrant operation, reduced harmonics and adjustable power factor
- Line supply unit available for 2-quadrant operation and a constant power factor of 0.96 across entire speed range
- Modular design for optimum configurations, including multidrive configurations
- Offshore cabinet versions available



### Series MEGADRIE LCI

- 2 MW to 72 MW (higher power on request)
- High power with series connection of thyristors
- N+1 thyristor redundancy possible
- Fuseless design
- Water- and air-cooled converters available
- Line side harmonics: 6-pulse, 12-pulse or 24-pulse
- Motor side harmonics: 6-pulse or 12-pulse
- High converter efficiency
- Proven technology and design
- Complete package solutions including transformers, drives and motors



## ABB standard DC drives

### Series DCS400

- Range from 20 to 820 A DC
- DCS400 is a digital DC drive targeted at OEMs, such as machine builders
- An integrated IGBT-based field supply results in less motor stress and better speed accuracy
- From 20 to 1,000 A at voltages up to 500 V AC (max. DC voltage 600 V)



## ABB industrial DC drives

### Series DCS800

- From 25 to 5,200 A
- Commissioning wizard gives easy start-up
- Easy to use - standard macros or user programmability
- Intuitive control panel with 'Help' key, consistent with many of the AC drives
- Adaptive programming for additional flexibility
- Modules can be connected in parallel up to 20,000 A
- Uses ACS800 I/O option modules and fieldbus modules
- I/O is backward compatible with DCS500 and DCS600
- Field converters built-in (up to 25 A)



# Power quality filters (PQF)

## Overview

- Actively eliminates harmonics in a controlled way
- Filters up to 50th harmonic in accordance with G5/4 requirements. Each harmonic individually programmable
- Redundancy feature allows units to continue when others have shut down
- Active filters - only work when harmonics are present thereby reducing unwanted losses, resulting in greater overall efficiency
- Close loop for better measurement of harmonics - thereby more accurately eliminating the potentially damaging harmonic
- Auto-detection of CT polarity - ensures accurate current distortion readings on network, resulting in easy commissioning
- Stores record trail. Fault and event log - any trip will have a record trail

## Series PQFM, PQFI

- Available in IP00 back plane or IP21, IP42 cabinets
- New intuitive user interface
- Current ratings, 70 A, 100 A, 130 A, 150 A, 250 A, 450 A, per module. The modules can be connected in parallel to a maximum of eight modules of equal rating

## Series PQFs

- Small compact unit suitable for wall mounting
- Low ratings available from 30 A, 45 A, 60 A, 70 A, 80 A, 90 A, 100 A. The modules can be connected in parallel to a maximum of four modules of equal rating
- Same user interface as the larger units
- Available in IP30



# Remote monitoring options

## Remote monitoring overview

Remote monitoring is the reporting of information back to the user, from a remote station or location. Typical remote monitoring information can include:

- Energy consumption and savings
- Motor condition
- Warnings (predictive maintenance), faults and alarms
- Diagnostics
- Monitoring actual values and parameters
- Parameter access is possible, but is not the primary function of remote monitoring



## Ethernet adapter – for ABB machinery drives and ABB standard drives

### Series - SREA-01

Ethernet adapter provides remote monitoring access for up to 10 drives. It connects to the drive(s) via an RS485 modbus interface. It can send process data, data logs and event messages independently, without a PLC or a dedicated on-site computer. The module can send either e-mails or SMS text messages to inform the user of the status of the drive(s) connected to it. It has an internal web server for easy configuration and drive access. Web pages can be configured with site photos and site naming.



## Ethernet adapter for ABB industrial drives

### Series - NETA-01, NETA-21

NETA-01 module provides remote access to nine ABB industrial drives. The module connects to the drive via a high speed optical connection that can be configured in a ring or star configuration. It can send process data, data logs and event messages independently, without a PLC or a dedicated on-site computer. The module can send either e-mails or SMS text messages to inform the user of the status of the drive(s) connected to it. It has an internal web server for easy configuration and drive access. Web pages can be configured with site naming. Full parameter access is possible.



## Ethernet adapter for local communication

### Series - MOXA

MOXA module provides remote access to a single individual drive. The module connects to the drive via an RS232 connection to the keypad/panel port of the drive. It is a low cost point-to-point remote monitoring device. MOXA is ideal as a point-to-point device over which commissioning tools can be connected to the drive from a remote location, so diagnosis of faults and problems are possible.



## High speed drive monitoring – remote diagnostics

### Series – DriveMonitor

DriveMonitor is a service tool which can be fitted to any ABB industrial drive in case of site problems and issues. It uses high speed optical connections to the drives power stages and monitors all of the switching signals sent. In this way complicated system problems can be diagnosed. DriveMonitor can also be used as a system optimisation and recording tool, as its memory buffers can save up to one years worth of performance data.



## Monitor drives on existing networks

### Series – DriveBrowser PC tool

DriveBrowser allows a user to monitor any ABB drive connected to an existing Ethernet network, without having to connect another “tools” chain network on the site. Connect DriveBrowser to a suitable “hub” location and view, edit and tune all of the ABB drives on the Ethernet ring.

# Software tools

ABB offers several software tools to facilitate and enhance the use of ABB drives. These tools provide a user-friendly and easy-to-use approach for the selection, commissioning and use of AC drives.

## Integration and programming tools

### Drive Composer




The Drive Composer PC tool offers fast and harmonised set-up, commissioning and monitoring for the new ABB industrial drive portfolio. The tool has 2 variants, a free version called Drive Composer

Entry and a professional level tool which is licensed. The free version of the tool provides start-up and maintenance programming with monitoring and parameter editing, while the professional version provides additional features such as custom parameter windows, control diagrams for easy parameter editing of the drive's configuration and the ability to programme the built-in safety module. Drive Composer will have add-ons for adaptive programming and CoDeSys programming for more complicated system designs.

### DriveAP

For adaptive programming of ABB industrial drives.

This PC tool is used to create, document, edit and download adaptive programs. Adaptive programming can be done with the standard control panel or with DriveAP.



DriveAP offers a clear and easy way to develop, test and document adaptive programmes with a PC. It modifies function blocks and their connections and requires no special programming.

### DriveStudio

A user-friendly PC environment for simple drive commissioning tasks as well as more demanding drive tuning and programming tasks. DriveStudio is used with the ABB machinery drive and ABB motion control drives and water and wastewater drives. Drive Studio contains:

Commissioning and tuning

- Drive overview screen
- Parameter setting and signal monitoring
- Data logger and on-line signal monitoring for tuning

Solution programme composer

- Function block programming with standard function block library

- Professional programming environment: hierarchy levels, custom circuits, user parameters, copy protection etc.


DriveCAM tool

Multiple methods for designing axis profile between reference axis and controlled drive axis

## Start-up and maintenance tools

### DriveWindow

A Windows application used for commissioning and maintenance. Functions include local control, monitoring, parameter edits, fault logging, trending, backup and restore




- Shows actual status of the connected drive
- Edit and show the drive parameters
- Save and load drive parameters
- Backup and restore drive parameters
- Offline configuration of drive parameters
- Read fault loggers and diagnostic data

Used with ABB industrial drives equipped with high-speed fibre optic communication, or remotely via the Internet.

### DriveWindow Light

Available for ABB general purpose drives and ABB machinery drives, has the same functions as DriveWindow but is designed for point-to-point communication, via control panel port.



### DriveConfig

Dedicated programming tool for the ABB micro drive. Allows access to the extended parameter set of ACS55 and allows un-powered programming.



### Drive Analyser

New PC tool to allow long term analysis of performance and diagnostics. Data can be collected for up to one year.

To download software tools, go to:  
[www.abb.com](http://www.abb.com) > drives > drive PC tools.



# Software tools

## Engineering tools

### DriveSize

For dimensioning drives and motors. This PC programme helps select an optimal motor, drive and transformer, which




is especially useful where a straightforward selection from a catalogue is not possible. DriveSize is used to compute network harmonics and to create documents about dimensioning. It contains current versions of ABB's motor and drive catalogues.

It can also be used in conjunction with ABB machinery drives to specify the dimensions of different kinds of linear or rotary movement mechanisms such as lead screws, rack and pinion combinations, belts and pulleys, conveyors, feed rolls and rotating tables.

DriveSize software can be used in Win98, WinNT, Win2000 and WinXP and Windows 7 operating systems.


### DriveChopper



For dimensioning a braking chopper and resistor.

DriveChopper is a web tool for braking chopper and resistor dimensioning. The programme is created especially for system designers who need a braking unit for a particular drive application.

### DriveUpgrade



For finding an adequate drive to replace an old one. This on-line tool is ideal for finding a replacement to an existing ABB drive that may be

coming to the end of its useful life. Simply input some basic information and the modern equivalent drive will be revealed.

To download, go to: [www.abb.com](http://www.abb.com) > drives > drive PC tools.

## Energy saving tools

For comparison of energy consumption between different flow control methods in pumps and fans, ABB has developed calculation tools for estimating the energy savings that become available when applying electric speed control to certain flow machines.

### PumpSave

For comparing AC drive control against throttling, on/off and hydraulic coupling control in pumps. Calculate how much energy and money you could be saving with ABB drives while also deriving other benefits such as soft starting and stopping, an improved power factor and connection into process automation. PumpSave also carries out a simple dimensioning and recommends an appropriate ABB drive type. Medium voltage drives now included.

### FanSave

For comparing AC drive control against traditional flow control methods in fans. Calculate the savings you can achieve by replacing outlet damper, inlet vane or pitch control methods with electronic speed control from an ABB drive. FanSave also provides financial and environmental figures concerning the control method retrofit project and recommends a suitable ABB drive type.

## The ABB Energy Calculator App

The App allows users to calculate the energy savings you can achieve on a typical pump or fan load by replacing direct-on-line control with a variable-speed drive. Simply select your industry and the operating duty profile, the voltage, phase and motor power rating, running hours and electricity cost. The App then estimates how much CO<sub>2</sub>, energy and money you can save by installing an ABB drive to control the application.

To download the ABB Energy Calculator App, visit the Apple APP store.

To download a series of energy saving tools go to: [www.abb.co.uk/energy](http://www.abb.co.uk/energy)

# Drive life cycle services

## Service options for variable-speed drives

A proactive drives maintenance programme keeps you competitive by minimising disruption to your production.

The many drives used in industry have a high degree of reliance placed upon them. Although drives are not normally the most expensive pieces of capital equipment, they often perform critical duties and have a high in-service value. A drive failure can result in loss of production and revenues, as well as having safety and environmental consequences. To reduce the risk and consequences of failure, the drive must be properly maintained at the right times in its lifecycle.

ABB provides customised and standard levels of service for drives support. The service levels mean your exact operational and financial needs can be met, maximising the reliability of your plant over its entire lifecycle. Service elements can be combined into a service contract, help with planning and budgeting.

## Life cycle services

The services offered by ABB span the entire value chain, from the moment a customer makes the first enquiry to disposal and recycling of the drive. Throughout the value chain, ABB provides training, technical support and customised contracts. All of this is supported by one of the most extensive global drive sales and service networks.

## Pre-purchase

ABB provides a range of services that help guide the customers to the right products for their applications.

## Order and delivery

Orders can be placed directly to ABB or through ABB's channel partners. ABB's sales and service network offers timely deliveries including express delivery.

## Installation and commissioning

While many customers have the resource to undertake installation and commissioning on their own, ABB and its channel partners offer professional installation and start-up services.

## Operation and maintenance

Through remote monitoring, ABB can guide the customer through a fast and efficient fault-finding procedure as well as analyse the operation of the drive and the customer's process. From site surveys to preventive maintenance and reconditioning of drives, ABB has all the options covered to keep its customers' processes operational.

## Upgrade and retrofit

An existing ABB drive can often be upgraded to the latest software or hardware to improve the performance of the application. Existing processes can be economically modernised by retrofitting the latest drive technology to cooling fans, removing the need for mechanical control equipment, such as inlet guide vanes or dampers and improving efficiency through energy savings.

## Replacement and recycling

ABB can advise on the best replacement drive while ensuring that the existing drive is disposed of in a way that meets all local environmental regulations.

## Entire value chain services

The main services available throughout the entire value chain include:

- Training and learning - ABB offers product and application training
- Technical support - At each stage of the value chain, an ABB expert is available to offer advice to keep the customer's process or plant operational.
- Contracts - Customised contracts can be devised between the customer and ABB.

The full portfolio of life cycle services are described in a separate brochure that is available on request – please call 07002 SERVICE (07002 7378423) for a copy.

## Drives Advantage

ABB's certified partners provide Drives Advantage: a series of services targeting the current range of products up to 400 kW. Services include:


- installation
- start-up assistance
- upgrades
- hire services
- planned maintenance
- repairs
- energy surveys
- training

The full portfolio of Drives Advantage services are described in a separate brochure that is available on request – please call 07000 DRIVES (07000 374837) for a copy.

## ABB University - Professional drives training

Factory certified courses delivered in a bespoke drives training facility by experienced applications and service personnel. With ABB University you can enrol onto either e-learning or classroom based courses. Please call **01952 228024** or visit [www.abb.com/abbuniversity](http://www.abb.com/abbuniversity)

# ABB low voltage AC motors

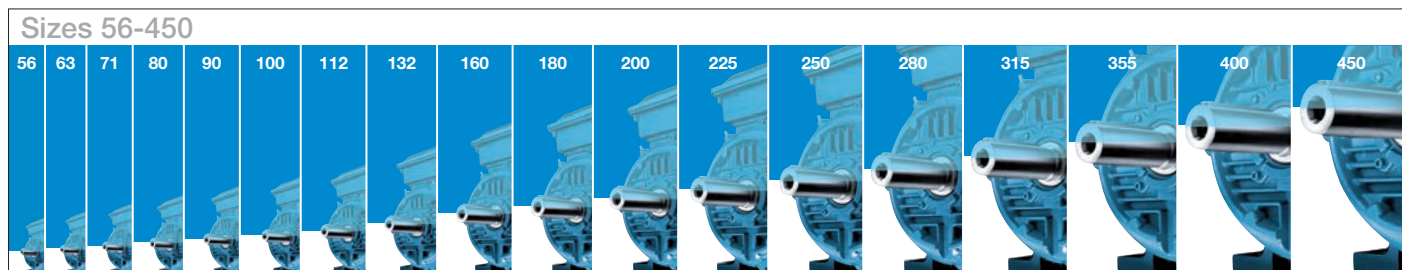

56	63	71	80	90	100	112	132	160	180	200	225	250	280	315	355	400	450
Aluminum motors																	
Cast iron motors																	

56	63	71	80	90	100	112	132	160	180	200	225	250	280	315	355	400	450
Cast iron motors																	
Premium efficiency motors																	

56	63	71	80	90	100	112	132	160	180	200	225	250	280	315	355	400	450
Flameproof motors																	
Increased safety motors																	
Non-sparking motors																	
Dust ignition proof motors																	

56	63	71	80	90	100	112	132	160	180	200	225	250	280	315	355	400	450
Process performance motors (cast iron)																	
General performance motors (aluminium, cast iron)																	
														Open drip proof motors			

Motors for additional applications																	
56	63	71	80	90	100	112	132	160	180	200	225	250	280	315	355	400	450
Brake motors										Open drip proof motors							
High ambient motors																	
Smoke venting motors																	
Single phase motors						Roller table motors											
														Water cooled motors			
														Permanent magnet motors			
																Wind turbine generators	
Servo motors																	

For more information call 07000 MOTORS (07000 668677)

# European MEPS for low voltage motors

**2009**

EuP Directive  
2005/32/EC  
Eco-design  
formally  
adopted 2009

## Mandatory EuP Directive

Applies to motors:

- rated voltage up to 1000 V
- single-speed, three-phase, 50 Hz
- 2, 4 and 6-pole
- rated output from 0.75 kW to 375 kW
- S1 Duty

Does not apply to motors designed to operate:

- in potentially explosive atmospheres as defined in ATEX directive 94/9/EC
- brake motors
- ambient air temperature outside the range -15°C...+40°C
- altitudes exceeding 1000m asl
- maximum operating air temperature above 400°C

## Implementation timetable

### Phase 1

From 16 June, 2012

Motors must meet the IE2 efficiency level

### Phase 2

From 1 January, 2015

Motors with a rated output of 7.5 kW - 375 kW must meet EITHER the IE3 efficiency level OR the IE2 level if fitted with variable-speed drive

### Phase 3

From 1 January, 2017

Motors with a rated output of 0.75 kW - 375 kW must meet EITHER the IE3 efficiency level OR the IE2 level if fitted with variable-speed drive

**2008**

IEC 60034-30

## Standard for LV motor efficiency classes

Motors covered by standard include:

- Single-speed, three-phase, 50 and 60 Hz
- 2, 4 or 6-pole
- Rated output from 0.75 kW to 375 kW
- Rated voltage  $U_N$  up to 1000 V
- Duty type S1 (continuous duty) or S3 (intermittent periodic duty) with a rated cyclic duration factor of 80 percent or higher
- Capable of operating direct online 50 and 60 Hz

## Super premium efficiency

IE4

Not yet defined

## Premium efficiency

IE3

Premium

## High efficiency


IE2

Comparable to Eff1

## Standard efficiency

IE1

Comparable to Eff2

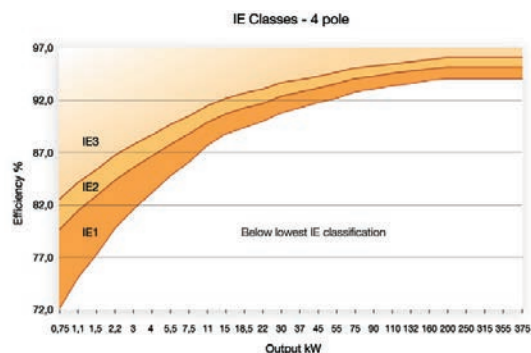

**2007**

IEC 60034-2-1

## Standard on efficiency measurement methods

Introduces new rules concerning the testing methods to be used for determining losses and efficiency.

The resulting efficiency values differ from those obtained under the previous IEC testing standard IEC 60034-2: 1996

ABB calculates efficiency values according to the indirect method, with additional losses determined from measurement. This is the preferred low uncertainty method outlined in the standard.



**For more information call 07000 MOTORS (07000 668677)**



# MotorAdvantage

A scheme to determine how best to save money, reduce energy use and lower maintenance costs from a plant's installed electric motor base.

MotorAdvantage aims to encourage industry to uncover the true cost of running electric motors. Research by ABB reveals that UK industry is failing to efficiently manage its motor inventory, thereby incurring millions of pounds of unnecessary downtime, repair and energy costs.

MotorAdvantage is aimed at companies operating a continuous process such as those found in food & beverage, chemical, oil & gas and pharmaceuticals. Such processes tend to have critical applications, whereby if a motor fails the cost to a company can be hundreds of pounds per hour in lost revenue. It is not just the loss of production but the potential loss of the company's customer.

## How it works

There are three stages to MotorAdvantage:

### 1. Consultation

During the consultation process ABB examines the installed motor asset register for the plant and, working with the local engineers, identifies up to five critical applications that are running either continuously or for more than 4,000 hours per annum. They then determine some basic information about these motors such as:

- How old are the installed motors?
- How efficient are the installed motors?
- How many hours do they run per annum?
- Have they been rewound before?
- What spares holding do you have for critical plant?
- What is your repair/rewind policy for 'failed' motors?

ABB also engages with the plant's process engineers to determine the exact design criteria for the various processes. This gives ABB a clearer understanding of how the process is meant to operate and its critical design operating points, thereby ensuring that a properly dimensioned motor is selected should a replacement be deemed necessary.

### 2. The Appraisal

An ABB engineer, or one of ABB's authorised channel partners, visits the end-user to inspect the selected motors, get an understanding of the plant, the inventory of spare motors, energy and maintenance plans. It is not unusual to find that an old motor can be 1-5 percent lower in efficiency compared to a new premium efficiency variant. If that motor is running continuously then you can achieve a typical payback of between two to three years should you wish to take the decision to scrap the motor prior to failure.

If the motor is replaced at the point of failure then taking the rewind cost into the payback calculation, the new motor cost can be recovered in less than 12 months. Bear in mind that



many rewind motors will only have a six month warranty of the repaired components whilst a new premium efficiency motor from ABB will come with a full three year warranty.

### 3. Proving the savings – report and recommendations

Following the collection of the data, the findings are analysed and potential savings identified using dedicated software. The findings are methodically presented, with tables being created to help identify where savings are likely to arise. Among the data available includes an estimation of present energy usage; whether the application would benefit from variable-speed control; payback time if an investment is made in new motors; carbon dioxide emission reductions; along with many other key facts and analysis.

An action plan is prepared, usually comprising an Executive Summary and a detailed Engineer's Report, highlighting applications that can save the most. The figures will normally be translated into monthly savings, and there will be detailed recommendations for implementation.

## Benefits

- In just half-a-day, an ABB engineer can quickly assess up to five installed motors that could benefit from a motor management plan
- Assesses the end-users current policy in the event of a motor failure and the financial impact on the company
- Identifies improvements to be made with regards to maintenance and stockholding
- Determines the energy use of the current installation
- Avoids damage to a customers brand or image caused through loss of production
- Avoids overly ambitious motor management plans that try to assess every single motor on a plant

# General performance motors

## What is a general performance motor?

General performance motors combine convenience and easy handling seamlessly with ABB's engineering expertise, while at the same time providing standard variants and modifications. The motors can be tailored according to the specific needs of OEMs. The high modularity enables adding a wide variety of elements to the robust frame, thus making the overall solution to fit the specific situation and customer need perfectly. As the user only pays for the enhancements needed and used, the motors are free from all unnecessary elements.

## Where can it be used?

- End-users in industry
- Tailored serial project OEM's
- Pumps
- Fans
- Compressors

## Highlights

- Variant codes from production which OEM customers need
- One year warranty
- IE2 efficiency
- 2, 4 & 6 pole designs



# General performance cast iron motors, 71-355, 2, 4 & 6 poles

IE2

TEFC low voltage motors, cast iron, IP 55, IC 411, single-speed. 400 V 3-phase 50 Hz

See product catalogues or [www.abb.com/motors&generators](http://www.abb.com/motors&generators) for more information on products.

Output kW	Frame size		Foot price	Flange price
3000 r/min = 2 poles				
0.37	M2BA	71 MA	£150	£164
0.55	M2BA	71 MB	£154	£173
0.75	M2BA	80 MB	£204	£222
1.1	M2BA	80 MC	£258	£296
1.5	M2BA	90 SLB	£306	£346
2.2	M2BA	90 SLC	£379	£418
3	M2BA	100 LB	£461	£512
4	M2BA	112 MB	£545	£598
5.5	M2BA	132 SMB	£714	£782
7.5	M2BA	132 SMC	£906	£977
11	M2BA	160 MLA	£962	£1,053
15	M2BA	160 MLB	£1,225	£1,313
18.5	M2BA	160 MLC	£1,456	£1,544
22	M2BA	180 MLA	£1,732	£1,868
30	M2BA	200 MLA	£2,361	£2,544
37	M2BA	200 MLB	£2,911	£3,094
45	M2BA	225 SMA	£3,410	£3,622
55	M2BA	250 SMA	£4,167	£4,410
75	M2BA(T)	280 SMA	£6,608	£6,965
90	M2BA(T)	280 SMB	£7,947	£8,304
110	M2BA(T)	315 SMA	£9,679	£10,286
132	M2BA(T)	315 SMB	£11,697	£12,304
160	M2BA(T)	315 SMC	£14,518	£15,125
200	M2BA(T)	315 MLA	£18,215	£18,822
250	M2BA(T)	355 S	£23,072	£24,143

Output kW	Frame size		Foot price	Flange price
1500 r/min = 4 poles				
0.25	M2BA	71 MA	£139	£157
0.37	M2BA	71 MB	£147	£176
0.55	M2BA	80 MA	£176	£204
0.75	M2BA	80 MD	£252	£277
1.1	M2BA	90 SLB	£316	£349
1.5	M2BA	90 SLD	£379	£412
2.2	M2BA	100 LC	£430	£479
3	M2BA	100 LD	£482	£531
4	M2BA	112 MB	£575	£628
5.5	M2BA	132 SMB	£736	£803
7.5	M2BA	132 SMC	£945	£1,015
11	M2BA	160 MLA	£995	£1,083
15	M2BA	160 MLB	£1,268	£1,356
18.5	M2BA	180 MLA	£1,456	£1,593
22	M2BA	180 MLB	£1,732	£1,868
30	M2BA	200 MLA	£2,274	£2,455
37	M2BA	225 SMA	£2,804	£3,016
45	M2BA	225 SMB	£3,410	£3,622
55	M2BA	250 SMA	£4,167	£4,410
75	M2BA(T)	280 SMA	£6,393	£6,750
90	M2BA(T)	280 SMB	£7,465	£7,840
110	M2BA(T)	315 SMA	£9,268	£9,875
132	M2BA(T)	315 SMB	£11,179	£11,786
160	M2BA(T)	315 SMC	£13,518	£14,125
200	M2BA(T)	315 MLA	£17,161	£17,768
250	M2BA(T)	355 S	£21,411	£22,465

Output kW	Frame size		Foot price	Flange price
1000 r/min = 6 poles				
0.18	M2BA	71 MA	£160	£181
0.25	M2BA	71 MB	£183	£206
0.37	M2BA	80 MA	£201	£227
0.55	M2BA	80 MB	£225	£255
0.75	M2BA	90 SLC	£236	£266
1.1	M2BA	90 SLE	£278	£312
1.5	M2BA	100 L	£348	£387
2.2	M2BA	112 MB	£469	£512
3	M2BA	132 SMB	£616	£659
4	M2BA	132 SMB	£670	£731
5.5	M2BA	132 SMF	£892	£927
7.5	M2BA	160 MLA	£1,028	£1,117

Output kW	Frame size		Foot price	Flange price
1000 r/min = 6 poles				
11	M2BA	160 MLB	£1,379	£1,467
15	M2BA	180 MLA	£1,793	£1,929
18.5	M2BA	200 MLA	£2,211	£2,393
22	M2BA	200 MLB	£2,629	£2,811
30	M2BA	225 SMA	£3,497	£3,710
37	M2BA	250 SMA	£4,205	£4,448
45	M2BA(T)	280 SMA	£5,840	£6,215
55	M2BA(T)	280 SMB	£7,143	£7,500
75	M2BA(T)	315 SMA	£9,572	£10,179
90	M2BA(T)	315 SMB	£11,500	£12,108
110	M2BA(T)	315 SMC	£13,983	£14,590
132	M2BA(T)	315 MLA	£16,697	£17,304
160	M2BA(T)	355 S	£20,643	£21,715

# General performance aluminium motors, 63-250, 2, 4 & 6 poles

IE2

TEFC low voltage motors, aluminium, IP 55, IC 411, single-speed. 400 V 3-phase 50 Hz

See product catalogues or [www.abb.com/motors&generators](http://www.abb.com/motors&generators) for more information on products.

Output kW	Frame size		Foot price	Flange price
3000 r/min = 2 poles				
0.09	M2AA	56 A	£118	£134
0.12	M2AA	56 B	£121	£138
0.18	M2AA	63 A	£130	£148
0.25	M2AA	63 B	£132	£150
0.37	M2AA	71 A	£141	£159
0.55	M2AA	71 B	£149	£167
0.75	M2AA	80 A	£198	£215
1.1	M2AA	80 B	£250	£287
1.5	M2AA	90 S	£297	£335
2.2	M2AA	90 L	£367	£405
3	M2AA	100 L	£447	£497
4	M2AA	112 M	£529	£580
5.5	M2AA	132 SA	£693	£759
7.5	M2AA	132 SB	£879	£948
11	M2AA	160 MLA	£1,067	£1,180
15	M2AA	160 MLB	£1,321	£1,417
18.5	M2AA	160 MLC	£1,584	£1,682
22	M2AA	180 MLA	£1,872	£1,998
30	M2AA	200 MLA	£2,422	£2,568
37	M2AA	200 MLB	£2,974	£3,138
45	M2AA	225 SMA	£4,546	£4,741
55	M2AA	250 SMA	£5,319	£5,531

Output kW	Frame size		Foot price	Flange price
1500 r/min = 4 poles				
0.06	M2AA	56 A	£114	£129
0.09	M2AA	56 B	£117	£132
0.12	M2AA	63 A	£126	£144
0.18	M2AA	63 B	£128	£146
0.25	M2AA	71 A	£134	£152
0.37	M2AA	71 B	£142	£170
0.55	M2AA	80 A	£170	£198
0.75	M2AA	80 B	£244	£268
1.1	M2AA	90 S	£306	£338
1.5	M2AA	90 L	£367	£400
2.2	M2AA	100 LA	£417	£465
3	M2AA	100 LB	£467	£515
4	M2AA	112 M	£558	£609
5.5	M2AA	132 S	£714	£779
7.5	M2AA	132 M	£917	£985
11	M2AA	160 MLA	£1,076	£1,189
15	M2AA	160 MLB	£1,345	£1,430
18.5	M2AA	180 MLA	£1,616	£1,729
22	M2AA	180 MLB	£1,904	£2,002
30	M2AA	200 MLA	£2,373	£2,486
37	M2AA	225 SMA	£3,193	£3,418
45	M2AA	225 SMB	£3,886	£4,112
55	M2AA	250 SMA	£4,643	£4,835

Output kW	Frame size		Foot price	Flange price
1000 r/min = 6 poles				
0.09	M2AA	63 A	£138	£156
0.12	M2AA	63 B	£142	£161
0.18	M2AA	71 A	£155	£175
0.25	M2AA	71 B	£177	£200
0.37	M2AA	80 A	£195	£220
0.55	M2AA	80 B	£218	£247
0.75	M2AA	90 S	£229	£258
1.1	M2AA	90 L	£269	£302
1.5	M2AA	100 L	£337	£375
2.2	M2AA	112 M	£455	£497
3	M2AA	132 S	£598	£639
4	M2AA	132 MA	£650	£709
5.5	M2AA	132 MB	£736	£775
7.5	M2AA	160 MLA	£1,102	£1,188
11	M2AA	160 MLB	£1,500	£1,584
15	M2AA	180 MLA	£1,938	£2,066
18.5	M2AA	200 MLA	£2,292	£2,422
22	M2AA	200 MLB	£2,389	£2,535
30	M2AA	225 SMA	£3,951	£4,144
37	M2AA	250 SMA	£4,692	£4,900



TEFC low voltage motors, cast iron frame, IP 55, IC 411, single-speed. 400 V 3-phase 50 Hz  
See product catalogues or [www.abb.com/motors&generators](http://www.abb.com/motors&generators) for more information on products.

## What is a process performance motor?

Process performance motors are the flagship of ABB's standard low voltage motors. This range provides the most comprehensive, versatile set of motors for the process industries and heavy-duty applications which are dependent on continuous reliability, lowest possible environmental impact and lifecycle costs. Their superior ability to perform reliably and efficiently, continuously and even under the most challenging circumstances, ensures that they power their way through the toughest tasks and conditions. As such they come with a three years warranty that can be extended to five years.

## Where can it be used?

- End-users in continuous process industries
- Project OEMs
- EPCs
- Demanding industries:
  - pulp and paper
  - metals
  - minerals and mining

## Highlights

- All variant codes possible for process industry
- Application knowledge and engineering
- With three years warranty and option to extend to five years
- IE2 efficiency, IE3 available as option



# Process performance cast iron motors, 80-450, 2 poles

IE2

TEFC low voltage motors, cast iron frame, IP 55, IC 411, single-speed. 400 V 3-phase 50 Hz  
See product catalogues or [www.abb.com/motors&generators](http://www.abb.com/motors&generators) for more information on products.

Output kW	Frame size		Foot price	Flange price	
3000 r/min = 2 poles					
0.75	M3BP	80 B	£329	£366	
1.1	M3BP	80 C	£346	£381	
1.5	M3BP	90 L	£364	£402	
2.2	M3BP	90 LB	£453	£489	
3	M3BP	100 LB	£532	£591	
4	M3BP	112 MB	£684	£767	
5.5	M3BP	132 SB	£828	£897	
7.5	M3BP	132 SBB	£999	£1,090	
11	M3BP	160 MLA	£1,126	£1,240	
15	M3BP	160 MLB	£1,338	£1,459	
18.5	M3BP	160 MLC	£1,633	£1,740	
22	M3BP	160 MLD	£1,913	£1,990	HO
22	M3BP	180 MLA	£1,990	£2,082	
30	M3BP	160 MLE	£2,407	£2,547	HO
30	M3BP	180 MLB	£2,407	£2,547	HO
30	M3BP	200 MLA	£2,577	£2,685	
37	M3BP	200 MLB	£3,753	£3,907	
45	M3BP	200 MLC	£4,313	£4,471	HO
45	M3BP	225 SMA	£4,794	£4,962	
55	M3BP	200 MLD	£5,491	£5,709	HO
55	M3BP	225 SMB	£5,491	£5,709	HO
55	M3BP	250 SMA	£5,738	£5,927	
75	M3BP	225 SMC	£6,837	£7,049	HO
75	M3BP	280 SMA	£7,333	£7,753	

HO = High-output design

Output kW	Frame size		Foot price	Flange price	
3000 r/min = 2 poles					
90	M3BP	250 SMC	£7,950	£8,141	HO
90	M3BP	280 SMB	£8,348	£8,601	
110	M3BP	280 SMC	£10,082	£10,425	HO
110	M3BP	315 SMA	£10,996	£11,357	
132	M3BP	315 SMB	£12,156	£12,529	
160	M3BP	315 SMC	£13,893	£14,269	
200	M3BP	315 MLA	£19,341	£21,223	
250	M3BP	315 LKA	£22,935	£23,619	HO
250	M3BP	355 SMA	£24,474	£25,672	
315	M3BP	315 LKC	£28,754	£29,438	HO
315	M3BP	355 SMB	£30,805	£32,004	
355	M3BP	355 SMC	£34,744	£35,941	
400	M3BP	355 MLA	£38,849	£40,047	
450	M3BP	355 MLB	£44,324	£45,523	
500	M3BP	355 LKA	£47,234	£48,431	
560	M3BP	355 LKB	£53,052	£54,250	
560	M3BP	400 LA	£55,619	£57,159	
560	M3BP	400 LKA	£57,140	£58,679	
630	M3BP	400 LKB	£63,299	£64,839	
630	M3BP	400 LB	£61,778	£63,319	
710	M3BP	400 LC	£69,651	£71,189	
710	M3BP	400 LKC	£71,171	£72,708	
800	M3BP	450 LA	£78,010	£80,400	
900	M3BP	450 LB	£85,030	£87,640	
1000	M3BP	450 LC	£94,383	£95,530	

# Process performance cast iron motors, 80-450, 4 poles

IE2

TEFC low voltage motors, cast iron frame, IP 55, IC 411, single-speed. 400 V 3-phase 50 Hz  
See product catalogues or [www.abb.com/motors&generators](http://www.abb.com/motors&generators) for more information on products.

Output kW	Frame size	Foot price	Flange price	
1500 r/min = 4 poles				
0.55	M3BP 80 A	£310	£348	
0.75	M3BP 80 D	£316	£353	
1.1	M3BP 90 LB	£346	£381	
1.5	M3BP 90 LD	£417	£454	
2.2	M3BP 100 LC	£473	£532	
3	M3BP 100 LD	£538	£602	
4	M3BP 112 MB	£668	£720	
5.5	M3BP 132 M	£850	£910	
7.5	M3BP 132 MB	£1,047	£1,107	
11	M3BP 160 MLA	£1,117	£1,230	
15	M3BP 160 MLB	£1,392	£1,530	
18.5	M3BP 160 MLC	£1,586	£1,710	HO
18.5	M3BP 180 MLA	£1,666	£1,773	
22	M3BP 160 MLD	£1,946	£2,014	HO
22	M3BP 180 MLB	£1,990	£2,066	
30	M3BP 180 MLC	£2,329	£2,469	HO
30	M3BP 200 MLA	£2,609	£2,749	
37	M3BP 200 MLB	£3,229	£3,431	HO
37	M3BP 225 SMA	£3,508	£3,694	
45	M3BP 200 MLC	£3,922	£4,092	HO
45	M3BP 225 SMB	£4,111	£4,313	
55	M3BP 225 SMC	£4,825	£5,059	HO
55	M3BP 250 SMA	£4,962	£5,198	
73	M3BP 225 SMD	£5,777	£6,106	HO
75	M3BP 250 SMB	£5,969	£6,359	HO
75	M3BP 280 SMA	£6,251	£6,627	

HO = High-output design

Output kW	Frame size	Foot price	Flange price	
1500 r/min = 4 poles				
90	M3BP 250 SMC	£7,367	£7,526	HO
90	M3BP 280 SMB	£7,504	£7,896	
110	M3BP 280 SMC	£8,556	£8,946	HO
110	M3BP 315 SMA	£9,259	£9,667	
132	M3BP 315 SMB	£10,935	£11,310	
160	M3BP 315 SMC	£12,781	£13,156	
200	M3BP 315 MLA	£18,167	£18,637	
250	M3BP 315 LKA	£19,887	£20,515	HO
250	M3BP 355 SMA	£21,454	£22,081	
280	M3BP 315 LKB	£24,585	£25,210	HO
315	M3BP 315 LKC	£26,933	£27,559	HO
315	M3BP 355 SMB	£28,500	£29,439	
355	M3BP 355 SMC	£30,380	£31,317	
400	M3BP 355 MLA	£34,449	£35,075	
450	M3BP 355 MLB	£38,989	£39,303	
500	M3BP 355 LKA	£43,218	£43,530	
560	M3BP 355 LKB	£47,132	£47,444	
560	M3BP 400 LKA	£49,480	£50,106	
560	M3BP 400 LA	£49,480	£50,106	
630	M3BP 400 LB	£54,960	£55,585	
630	M3BP 400 LKB	£57,672	£59,210	
710	M3BP 400 LC	£65,029	£66,568	
710	M3BP 400 LKC	£66,552	£68,090	
800	M3BP 450 LA	£74,540	£76,260	
900	M3BP 450 LB	£81,994	£83,886	
1000	M3BP 450 LC	£90,193	£92,275	

# Process performance cast iron motors, 80-450, 6 & 8 poles IE2

TEFC low voltage motors, cast iron frame, IP 55, IC 411, single-speed. 400 V 3-phase 50 Hz  
See product catalogues or [www.abb.com/motors&generators](http://www.abb.com/motors&generators) for more information on products.

Output kW	Frame size		Foot price	Flange price	
1000 r/min = 6 poles					
0.37	M3BP	80 A	£312	£350	
0.55	M3BP	80 B	£315	£351	
0.75	M3BP	90 LB	£348	£382	
1.1	M3BP	90 LD	£417	£454	
1.5	M3BP	100 L	£518	£573	
2.2	M3BP	112 MB	£639	£696	
3	M3BP	132 MA	£828	£891	
4	M3BP	132 MA	£939	£996	
5.5	M3BP	132 MC	£1,014	£1,077	
7.5	M3BP	160 MLA	£1,112	£1,222	
11	M3BP	160 MLB	£1,619	£1,735	
15	M3BP	160 MLC	£1,832	£1,956	HO
15	M3BP	180 MLA	£1,990	£2,129	
18.5	M3BP	180 MLB	£2,299	£2,423	HO
18.5	M3BP	200 MLA	£2,375	£2,533	
22	M3BP	200 MLB	£2,639	£2,812	
30	M3BP	200 MLC	£3,772	£3,973	HO
30	M3BP	225 SMA	£4,145	£4,344	
37	M3BP	225 SMB	£4,655	£4,808	HO
37	M3BP	250 SMA	£4,855	£5,074	
45	M3BP	250 SMB	£6,824	£7,041	HO
45	M3BP	280 SMA	£7,114	£7,348	
55	M3BP	250 SMC	£7,526	£7,791	HO
55	M3BP	280 SMB	£7,741	£7,991	

Output kW	Frame size		Foot price	Flange price	
750 r/min = 8 poles					
0.18	M3BP	80 A	£214	£250	
0.25	M3BP	80 B	£244	£281	
0.37	M3BP	90 L	£296	£330	
0.55	M3BP	90 LB	£363	£395	
0.75	M3BP	100 LA	£435	£480	
1.1	M3BP	100 LB	£555	£600	
1.5	M3BP	112 M	£670	£724	
2.2	M3BP	132 S	£860	£925	
3	M3BP	132 M	£1,026	£1,095	
4	M3BP	160 MLA	£1,141	£1,261	
5.5	M3BP	160 MLB	£1,203	£1,314	
7.5	M3BP	160 MLC	£1,454	£1,569	
11	M3BP	180 MLA	£2,204	£2,299	
15	M3BP	200 MLA	£2,672	£2,840	
18.5	M3BP	225 SMA	£3,460	£3,614	
22	M3BP	225 SMB	£4,236	£4,436	
30	M3BP	250 SMA	£5,088	£5,337	
37	M3BP	280 SMA	£7,348	£7,598	
45	M3BP	280 SMB	£7,801	£8,069	
55	M3BP	280 SMC	£8,900	£9,243	HO
55	M3BP	315 SMA	£9,493	£9,869	

HO = High-output design

Output kW	Frame size		Foot price	Flange price	
1000 r/min = 6 poles					
75	M3BP	280 SMC	£8,900	£9,259	HO
75	M3BP	315 SMA	£9,524	£9,917	
90	M3BP	315 SMB	£11,198	£11,794	
110	M3BP	315 SMC	£13,612	£14,206	
132	M3BP	315 MLA	£16,759	£17,854	
160	M3BP	315 LKA	£18,793	£19,418	HO
160	M3BP	355 SMA	£19,106	£20,203	
180	M3BP	315 LKB	£20,985	£21,611	HO
200	M3BP	315 LKC	£23,332	£23,960	HO
200	M3BP	355 SMB	£23,802	£24,898	
250	M3BP	355 SMC	£29,439	£30,536	
315	M3BP	355 MLB	£35,389	£36,485	
355	M3BP	355 LKA	£42,123	£43,218	
400	M3BP	355 LKB	£44,313	£45,253	
400	M3BP	400 LA	£46,973	£50,261	
400	M3BP	400 LKA	£46,973	£50,261	
450	M3BP	400 LKB	£53,082	£56,839	
450	M3BP	400 LB	£53,082	£56,839	
500	M3BP	400 LC	£58,875	£63,100	
500	M3BP	400 LKC	£58,875	£63,100	
560	M3BP	400 LKD	£65,294	£69,991	
560	M3BP	400 LD	£65,294	£69,991	
630	M3BP	450 LA	£66,727	£71,020	
710	M3BP	450 LB	£71,762	£75,790	
800	M3BP	450 LC	£79,500	£84,270	

Output kW	Frame size		Foot price	Flange price	
750 r/min = 8 poles					
75	M3BP	315 SMB	£11,527	£12,124	
90	M3BP	315 SMC	£14,128	£14,722	
110	M3BP	315 MLA	£17,228	£17,854	
132	M3BP	315 LKA	£18,444	£18,974	HO
132	M3BP	355 SMA	£20,670	£21,454	
150	M3BP	315 LKB	£20,670	£21,454	HO
160	M3BP	315 LKC	£21,836	£22,578	HO
160	M3BP	355 SMB	£23,488	£24,585	
200	M3BP	355 SMC	£32,571	£33,511	
250	M3BP	355 MLB	£40,554	£41,493	
315	M3BP	355 LKB	£49,012	£49,792	
315	M3BP	400 LKA	£51,987	£52,767	
315	M3BP	400 LA	£51,987	£52,767	
355	M3BP	400 LKB	£58,718	£59,031	
355	M3BP	400 LB	£58,718	£59,031	
400	M3BP	400 LC	£65,135	£65,448	
400	M3BP	400 LKC	£65,135	£65,448	
450	M3BP	450 LA	£68,370	£71,105	
500	M3BP	450 LB	£76,108	£79,153	
560	M3BP	450 LC	£82,680	£85,988	
630	M3BP	450 LD	£91,160	£94,807	



# Process performance aluminium motors, 63-280

## 2, 4, 6 & 8 poles

IE2

TEFC low voltage motors, aluminium, IP 55, IC 411, single-speed. 400 V 3-phase 50 Hz

See product catalogues or [www.abb.com/motors&generators](http://www.abb.com/motors&generators) for more information on products.

Output kW	Frame size		Foot price	Flange price
3000 r/min = 2 poles				
0.18	M3AA	63 A	£137	£156
0.25	M3AA	63 B	£139	£158
0.37	M3AA	71 A	£149	£167
0.55	M3AA	71 B	£157	£176
0.75	M3AA	80 B	£208	£226
1.1	M3AA	80 C	£263	£302
1.5	M3AA	90 L	£312	£352
2.2	M3AA	90 LB	£386	£426
3	M3AA	100 LB	£470	£522
4	M3AA	112 MB	£556	£609
5.5	M3AA	132 SB	£728	£797
7.5	M3AA	132 SC	£923	£996
11	M3AA	160 MLA	£1,134	£1,230
15	M3AA	160 MLB	£1,473	£1,582
18.5	M3AA	160 MLC	£1,768	£1,876
22	M3AA	180 MLA	£2,016	£2,155
30	M3AA	200 MLA	£2,544	£2,697
37	M3AA	200 MLB	£3,318	£3,504
45	M3AA	225 SMA	£4,774	£4,979
55	M3AA	250 SMA	£5,585	£5,808
75	M3AA	280 SMA	£6,894	£7,073
90	M3AA	280 SMB	£8,077	£8,290

Output kW	Frame size		Foot price	Flange price
1500 r/min = 4 poles				
0.12	M3AA	63 A	£133	£152
0.18	M3AA	63 B	£135	£154
0.25	M3AA	71 A	£141	£160
0.37	M3AA	71 B	£150	£179
0.55	M3AA	80 A	£179	£208
0.75	M3AA	80 D	£257	£282
1.1	M3AA	90 LB	£322	£355
1.5	M3AA	90 LD	£386	£420
2.2	M3AA	100 LC	£438	£489
3	M3AA	100 LD	£491	£541
4	M3AA	112 MB	£586	£640
5.5	M3AA	132 M	£750	£818
7.5	M3AA	132 MA	£963	£1,035
11	M3AA	160 MLA	£1,157	£1,253
15	M3AA	160 MLB	£1,501	£1,596
18.5	M3AA	180 MLA	£1,706	£1,845
22	M3AA	180 MLB	£2,047	£2,186
30	M3AA	200 MLA	£2,636	£2,822
37	M3AA	225 SMA	£3,353	£3,589
45	M3AA	225 SMB	£4,081	£4,318
55	M3AA	250 SMA	£4,876	£5,077
75	M3AA	280 SMA	£6,251	£6,466
90	M3AA	280 SMB	£7,335	£7,534

Output kW	Frame size		Foot price	Flange price
1000 r/min = 6 poles				
0.09	M3AA	63 A	£145	£164
0.12	M3AA	63 B	£150	£170
0.18	M3AA	71 A	£163	£184
0.25	M3AA	71 B	£186	£210
0.37	M3AA	80 A	£205	£231
0.55	M3AA	80 B	£229	£260
0.75	M3AA	90 LB	£280	£307
1.1	M3AA	90 LD	£345	£368
1.5	M3AA	100 LC	£395	£426
2.2	M3AA	112 MB	£496	£529
3	M3AA	132 S	£628	£671
4	M3AA	132 MA	£769	£807
5.5	M3AA	132 MC	£950	£979
7.5	M3AA	160 MLA	£1,230	£1,326
11	M3AA	160 MLB	£1,675	£1,768
15	M3AA	180 MLA	£2,093	£2,233
18.5	M3AA	200 MLA	£2,512	£2,698
22	M3AA	200 MLB	£2,962	£3,148
30	M3AA	225 SMA	£4,149	£4,352
37	M3AA	250 SMA	£4,931	£5,179
45	M3AA	280 SMA	£5,778	£5,990
55	M3AA	280 SMB	£7,068	£7,458

Output kW	Frame size		Foot price	Flange price
750 r/min = 8 poles				
0.09	M3AA	71 A	£165	£182
0.12	M3AA	71 B	£184	£208
0.18	M3AA	80 A	£208	£234
0.25	M3AA	80 B	£217	£245
0.37	M3AA	90 S	£290	£323
0.55	M3AA	90 L	£355	£388
0.75	M3AA	100 LA	£422	£465
1.1	M3AA	100 LB	£526	£568
1.5	M3AA	112 M	£636	£686
2.2	M3AA	132 S	£807	£868
3	M3AA	132 M	£942	£1,006
4	M3AA	160 MLA	£1,134	£1,230
5.5	M3AA	160 MLB	£1,411	£1,504
7.5	M3AA	160 MLC	£1,690	£1,783
11	M3AA	180 MLA	£2,233	£2,372
15	M3AA	200 MLA	£2,807	£2,993
18.5	M3AA	225 SMA	£3,442	£3,659
22	M3AA	225 SMB	£4,199	£4,385
30	M3AA	250 SMA	£5,011	£5,215
37	M3AA	280 SMA	£5,752	£5,982

High output design motors available on request.

# Premium efficiency process performance motors

## Innovative thinking – highest efficiency and reliability with off-the-shelf availability

ABB's new generation process performance premium efficiency motors deliver maximum value over their entire life cycle. Their IE3 efficiency rating makes them an ideal environmental choice for motor users seeking to save energy and reduce their carbon footprint.

### New levels of efficiency

Rising energy costs and increasing concerns about the environment are focusing attention on ways to further reduce energy consumption. Motor-driven systems account for 65 percent of all the electricity used in industry, giving motors a major role to play in efforts to reduce energy use.

Cutting-edge design, quality materials and advanced manufacturing techniques make ABB's process performance premium efficiency motors extremely reliable and energy efficient, even under the most challenging conditions.

### Future-proof solution

ABB motors comply with the latest efficiency standards and requirements. ABB closely follows developments in the global regulatory environment and ensures that its products stay ahead.

Process performance premium efficiency motors with the IE3 efficiency rating already meet the requirements of the EU MEPS (European Minimum Energy Performance Standard) scheme set to come into force in 2015. These motors are available now for delivery from stock.

Motors for the super premium IE4 efficiency class are also available from 160 to 355 frame size.

### Excellent all-round performance

Process performance premium efficiency motors offer enhanced operating performance, low starting currents, and an excellent torque curve. They produce less noise, are subject to lower mechanical stresses, and run cooler than less efficient motors.

Cooler running is a big advantage. Reducing the temperature of the bearings and windings extends the lubrication intervals and increases the useful life of the motor. This translates into higher reliability, easier maintenance, and a longer life cycle – factors which reduce the overall cost of ownership. As a result, ABB's process performance premium efficiency motors have longer warranties than many other types of motor.

With an extensive range of accessories available, ABB's process performance premium efficiency motors are particularly suitable for industrial and OEM use. They are ideal for all applications demanding efficiency and reliability, especially under challenging conditions.

Motor types	M4BP
Frame sizes	160 to 355
Output range	11 kW to 355 kW
Poles	2 to 6 poles
Frame material	Cast iron
Voltage	up to 690 V, 50 & 60 Hz



# Premium efficiency process performance cast iron motors, IE3 160-355, 2, 4 & 6 poles

TEFC low voltage motors, cast iron frame, IP 55, IC 411, single-speed. 400 V 3-phase 50 Hz  
See product catalogues or [www.abb.com/motors&generators](http://www.abb.com/motors&generators) for more information on products.

Output kW	Frame size		Foot price	Flange price
3000 r/min = 2 poles				
11	M3BP	160 MLA	£1,734	£1,880
15	M3BP	160 MLB	£2,257	£2,428
18.5	M3BP	160 MLC	£2,712	£2,864
22	M3BP	180 MLA	£3,054	£3,262
30	M3BP	200 MLA	£3,812	£4,096
37	M3BP	200 MLB	£5,007	£5,272
45	M3BP	225 SMA	£6,031	£6,353
55	M3BP	250 SMA	£7,320	£7,680
75	M3BP	280 SMB	£8,855	£9,362
90	M3BP	280 SMC	£10,082	£10,387
110	M3BP	315 SMB	£13,279	£13,715
132	M3BP	315 SMC	£14,679	£15,130
160	M3BP	315 MLA	£16,776	£17,231
200	M3BP	315 MLB	£23,356	£25,628
250	M3BP	315 LKB	£27,720	£30,450
200	M3BP	355 SMA	£28,350	£31,080
250	M3BP	355 SMB	£29,554	£31,000
315	M3BP	355 SMC	£37,198	£38,646
355	M3BP	355 MLA	£41,954	£43,400

Output kW	Frame size		Foot price	Flange price
1500 r/min = 4 poles				
11	M3BP	160 MLA	£1,770	£1,916
15	M3BP	160 MLB	£2,295	£2,447
18.5	M3BP	180 MLA	£2,598	£2,807
22	M3BP	180 MLB	£3,110	£3,319
30	M3BP	200 MLA	£3,964	£4,248
37	M3BP	225 SMA	£4,817	£5,139
45	M3BP	225 SMB	£5,822	£6,144
55	M3BP	250 SMA	£7,017	£7,396
75	M3BP	280 SMB	£7,549	£8,004
90	M3BP	280 SMC	£9,062	£9,536
110	M3BP	315 SMC	£11,181	£11,674
132	M3BP	315 SMD	£13,205	£13,658
160	M3BP	315 MLB	£15,434	£15,887
200	M3BP	315 LKB	£20,176	£21,938
250	M3BP	315 LKC	£24,402	£24,612
200	M3BP	355 SMA	£21,410	£22,938
250	M3BP	355 SMB	£25,907	£26,664
315	M3BP	355 SMC	£34,414	£35,548
355	M3BP	355 MLA	£36,684	£37,816

Output kW	Frame size		Foot price	Flange price
1000 r/min = 6 poles				
7.5	M3BP	160 MLA	£1,880	£2,030
11	M3BP	160 MLB	£2,560	£2,712
15	M3BP	180 MLA	£3,186	£3,395
18.5	M3BP	200 MLA	£3,793	£4,059
22	M3BP	200 MLB	£4,457	£4,741
30	M3BP	225 SMA	£6,107	£6,429
37	M3BP	250 SMA	£7,320	£7,680
45	M3BP	280 SMB	£8,592	£8,874
55	M3BP	280 SMC	£9,349	£9,650
75	M3BP	315 SMC	£11,501	£11,976
90	M3BP	315 SMD	£13,522	£14,243
110	M3BP	315 MLB	£16,437	£17,154
132	M3BP	315 LKA	£20,237	£21,560
160	M3BP	315 LKC	£22,910	£23,448
160	M3BP	355 SMB	£23,617	£24,921
200	M3BP	355 SMC	£29,558	£30,717
250	M3BP	355 MLB	£36,368	£37,527
315	M3BP	355 LKA	£43,612	£44,916
355	M3BP	355 LKB	£52,016	£53,175

# Motors for hazardous areas

## Reliability and safety

The flameproof enclosure design has the following features and benefits:


- Prevents an explosion which takes place inside the enclosure from propagating through gaps to the ambient
- Withstands the explosion pressure created inside the enclosures
- All surface temperatures are selected to comply with the temperature class
- Benefits when dealing with special operating modes such as heavy starts, switching operations or converter-powered operation
- Suitability for use in temperature classes T5 and T6
- Can be used both in Zone 1 and Zone 2

## Maintainability

- Only specified workshops are allowed to make changes and services to motors for hazardous areas
- ABB worldwide service network offers you service and maintenance for flameproof motors

## Availability

- Low voltage motors up to about 100 kW are available from central stocks

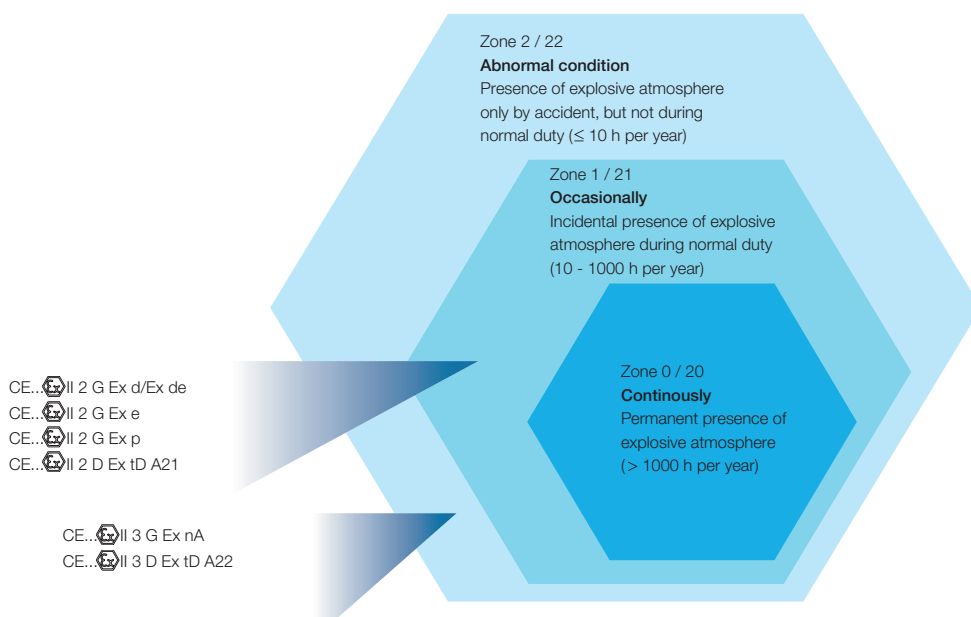

Explosive atmospheres worldwide are classified by zone, according to the risk posed by explosive gas or dust in the atmosphere.

## Classification of explosive atmospheres according to CENELEC and IEC

The definition of areas according to the presence of atmosphere are set up in the following standards:

IEC/EN 60079-10-1 Gas  
IEC/EN 60079-10-2 Dust


Explosive atmosphere	Permanent presence	Incidental presence (normal operation conditions)	Accidental presence (abnormal operation conditions)
Gas ('G')	Zone 0	Zone 1	Zone 2
Dust ('D'/'DIP'/'Ex tD')	Zone 20	Zone 21	Zone 22

Note: In certain countries Ex d and Ex e motors are also used in Zone 2.




# Motors for hazardous areas

## Marking of equipment according to ATEX

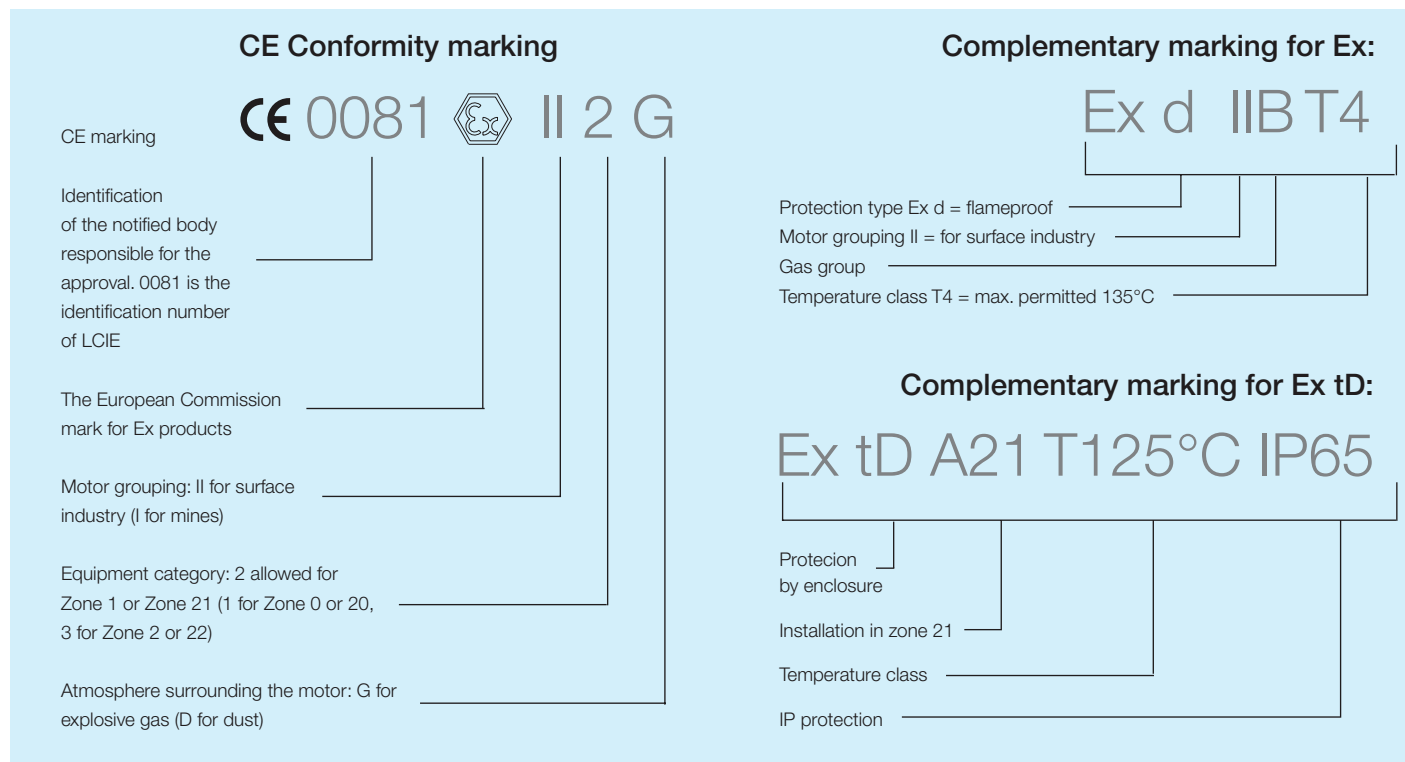

## Marking of equipment according to IECEx

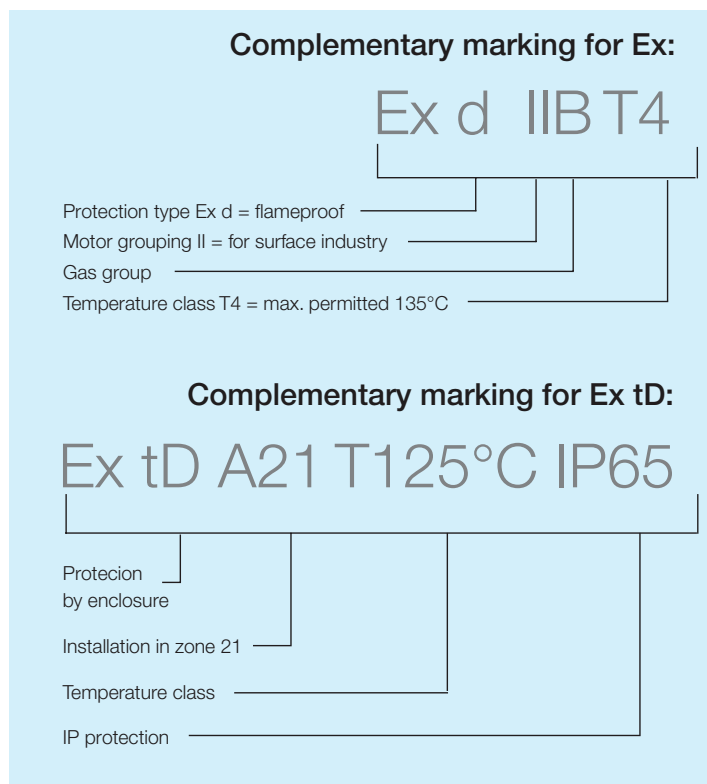

# Flameproof motors, 80-400, 2 & 4 poles

## Ex d/e\* IIB T4



TEFC low voltage motors, IP 55, IC 411, single-speed. 400 V 3-phase 50 Hz

See product catalogues or [www.abb.com/motors&generators](http://www.abb.com/motors&generators) for more information on products.

Output kW	Frame size	Foot price	Flange price	
3000 r/min = 2 poles				
0.75	M3JP/KP 80 MA	£727	£774	
1.1	M3JP/KP 80 MB	£762	£835	
1.5	M3JP/KP 90 SLA	£842	£914	
2.2	M3JP/KP 90 SLC	£999	£1,062	
3	M3JP/KP 100 LA	£1,058	£1,129	
4	M3JP/KP 112 MB	£1,314	£1,401	
5.5	M3JP/KP 132 SMB	£1,527	£1,605	
7.5	M3JP/KP 132 SMD	£1,945	£2,009	
11	M3JP/KP 160 MLA	£2,250	£2,410	
15	M3JP/KP 160 MLB	£2,666	£2,779	
18.5	M3JP/KP 160 MLC	£3,033	£3,115	
22	M3JP/KP 180 MLA	£3,757	£3,884	
22	M3JP/KP 160 MLD	£3,530	£3,644	HO
30	M3JP/KP 200 MLA	£4,782	£4,974	
30	M3JP/KP 180 MLB	£4,476	£4,606	HO
37	M3JP/KP 200 MLC	£6,354	£6,641	
37	M3JP/KP 180 MLC	£6,266	£6,506	HO
45	M3JP/KP 225 SMB	£8,596	£8,916	
45	M3JP/KP 200 MLE	£8,099	£8,457	HO
55	M3JP/KP 250 SMA	£11,306	£11,723	
55	M3JP/KP 225 SMC	£10,617	£11,018	HO
67	M3JP/KP 225 SMD	£12,009	£12,749	HO
75	M3JP/KP 280 SMA	£15,329	£15,841	
75	M3JP/KP 250 SMB	£14,318	£14,815	HO
90	M3JP/KP 280 SMB	£20,043	£20,685	
90	M3JP/KP 250 SMC	£16,018	£17,041	HO
110	M3JP/KP 315 SMA	£24,210	£24,690	
110	M3JP/KP 280 SMC	£22,766	£23,249	HO
132	M3JP/KP 315 SMB	£28,699	£29,178	
160	M3JP/KP 315 SMC	£32,545	£33,025	
200	M3JP/KP 315 MLA	£40,879	£41,361	
250	M3JP/KP 355 SMA	£44,530	£45,823	
315	M3JP/KP 355 SMB	£54,138	£55,431	
355	M3JP/KP 355 SMC	£58,202	£59,494	
400	M3JP/KP 355 MLA	£64,482	£65,776	
450	M3JP/KP 355 MLB	£72,057	£73,351	
500	M3JP/KP 355 LKA	£83,883	£85,176	
560	M3JP/KP 400 LA	£115,256	£118,623	
560	M3JP/KP 400 LKA	£115,256	£118,623	
630	M3JP/KP 400 LKB	£126,000	£130,485	
630	M3JP/KP 400 LB	£126,000	£130,485	
710	M3JP/KP 400 LC	£142,000	£147,000	
710	M3JP/KP 400 LKC	£142,000	£147,000	

\* JP Exd

\* KP Exde

HO = High-output design

Output kW	Frame size	Foot price	Flange price	
1500 r/min = 4 poles				
0.55	M3JP/KP 80 MA	£665	£727	
0.75	M3JP/KP 80 MB	£695	£762	
1.1	M3JP/KP 90 SLA	£740	£805	
1.5	M3JP/KP 90 SLC	£814	£883	
2.2	M3JP/KP 100 LA	£887	£959	
3	M3JP/KP 100 LB	£1,155	£1,224	
4	M3JP/KP 112 MC	£1,233	£1,324	
5.5	M3JP/KP 132 SMB	£1,632	£1,723	
7.5	M3JP/KP 132 SMD	£1,815	£1,913	
11	M3JP/KP 160 MLC	£2,264	£2,377	
15	M3JP/KP 160 MLE	£2,808	£2,908	
18.5	M3JP/KP 180 MLA	£3,515	£3,659	
18.5	M3JP/KP 160 MLF	£3,307	£3,403	HO
22	M3JP/KP 180 MLB	£3,901	£4,044	
22	M3JP/KP 160 MLG	£3,705	£3,836	HO
30	M3JP/KP 200 MLB	£4,879	£5,056	
30	M3JP/KP 180 MLC	£4,573	£4,701	HO
37	M3JP/KP 225 SMB	£6,002	£6,226	
37	M3JP/KP 200 MLC	£5,567	£5,761	HO
45	M3JP/KP 225 SMC	£7,091	£7,330	
55	M3JP/KP 250 SMA	£8,694	£9,109	
55	M3JP/KP 225 SMD	£8,211	£8,611	HO
62	M3JP/KP 225 SME	£9,360	£10,282	HO
75	M3JP/KP 280 SMA	£11,404	£11,931	
75	M3JP/KP 250 SMB	£10,729	£11,225	HO
86	M3JP/KP 250 SMC	£12,875	£13,470	HO
90	M3JP/KP 280 SMB	£15,714	£16,195	
110	M3JP/KP 315 SMA	£17,959	£18,599	
110	M3JP/KP 280 SMC	£17,799	£18,279	HO
132	M3JP/KP 315 SMB	£21,965	£22,445	
160	M3JP/KP 315 SMC	£24,210	£24,690	
200	M3JP/KP 315 MLA	£31,904	£32,383	
250	M3JP/KP 355 SMA	£39,919	£41,041	
315	M3JP/KP 355 SMB	£50,338	£51,459	
355	M3JP/KP 355 SMC	£56,749	£57,871	
400	M3JP/KP 355 MLA	£63,802	£65,246	
450	M3JP/KP 355 MLB	£70,948	£72,241	
500	M3JP/KP 355 LKA	£78,524	£79,817	
560	M3JP/KP 400 LA	£89,425	£91,086	
560	M3JP/KP 400 LKA	£89,425	£91,086	
630	M3JP/KP 400 LB	£100,671	£104,357	
630	M3JP/KP 400 LKB	£100,671	£104,357	
710	M3JP/KP 400 LC	£104,698	£108,531	
710	M3JP/KP 400 LKC	£104,698	£108,531	

# Flameproof motors, 80-400, 6 & 8 poles

## Ex d/e\* IIB T4

**ATEX**  
Certified

TEFC low voltage motors, IP 55, IC 411, single-speed. 400 V 3-phase 50 Hz

See product catalogues or [www.abb.com/motors&generators](http://www.abb.com/motors&generators) for more information on products.

Output kW	Frame size	Foot price	Flange price	
1000 r/min = 6 poles				
0.37	M3JP/KP 80 MA	£740	£805	
0.55	M3JP/KP 80 MB	£774	£837	
0.75	M3JP/KP 90 SLA	£807	£859	
1.1	M3JP/KP 90 SLC	£819	£887	
1.5	M3JP/KP 100 LA	£887	£959	
2.2	M3JP/KP 112 MB	£1,233	£1,324	
3	M3JP/KP 132 SMB	£1,657	£1,735	
4	M3JP/KP 132 SMC	£1,754	£1,815	
5.5	M3JP/KP 132 SMD	£1,831	£1,945	
7.5	M3JP/KP 160 MLA	£2,264	£2,377	
11	M3JP/KP 160 MLB	£2,985	£3,082	
14	M3JP/KP 160 MLC	£3,583	£3,656	HO
15	M3JP/KP 180 MLB	£3,980	£4,107	
18.5	M3JP/KP 180 MLC	£4,497	£4,640	HO
18.5	M3JP/KP 200 MLA	£4,766	£4,959	
22	M3JP/KP 200 MLB	£5,278	£5,456	
30	M3JP/KP 200 MLC	£6,658	£6,832	HO
30	M3JP/KP 225 SMB	£7,074	£7,281	
37	M3JP/KP 250 SMA	£9,078	£9,319	
37	M3JP/KP 225 SMC	£8,052	£8,274	HO
45	M3JP/KP 280 SMA	£11,404	£11,931	
45	M3JP/KP 250 SMB	£10,280	£10,520	HO
55	M3JP/KP 280 SMB	£15,841	£16,356	
75	M3JP/KP 315 SMA	£18,118	£18,599	
75	M3JP/KP 280 SMC	£16,003	£16,356	HO
90	M3JP/KP 315 SMB	£21,965	£22,445	
110	M3JP/KP 315 SMC	£25,332	£25,972	
132	M3JP/KP 315 MLA	£29,019	£29,662	
160	M3JP/KP 355 SMA	£35,752	£36,392	
200	M3JP/KP 355 SMB	£44,566	£45,368	
250	M3JP/KP 355 SMC	£55,466	£56,430	
315	M3JP/KP 355 MLB	£69,896	£70,696	
355	M3JP/KP 355 LKA	£81,478	£82,772	
400	M3JP/KP 400 LA	£88,489	£92,176	
400	M3JP/KP 400 LKA	£88,489	£92,176	
450	M3JP/KP 400 LB	£99,548	£103,874	
450	M3JP/KP 400 LKB	£99,548	£103,874	
500	M3JP/KP 400 LC	£110,700	£115,400	
500	M3JP/KP 400 LKC	£110,700	£115,400	
560	M3JP/KP 400 LD	£117,400	£122,000	
560	M3JP/KP 400 LKD	£117,400	£122,000	

\* JP Exd

\* KP Exde

HO = High-output design

Output kW	Frame size	Foot price	Flange price	
750 r/min = 8 poles				
0.18	M3JP/KP 80 MA	£741	£805	
0.25	M3JP/KP 80 MB	£780	£841	
0.37	M3JP/KP 90 SLA	£799	£867	
0.55	M3JP/KP 90 SLC	£878	£948	
0.75	M3JP/KP 100 LA	£963	£1,036	
1.1	M3JP/KP 100 LB	£1,257	£1,324	
1.5	M3JP/KP 112 MC	£1,328	£1,413	
2.2	M3JP/KP 132 SMC	£1,784	£1,864	
3	M3JP/KP 132 SMD	£1,992	£2,054	
4	M3JP/KP 160 MLA	£2,153	£2,347	
5.5	M3JP/KP 160 MLB	£2,602	£2,697	
7.5	M3JP/KP 160 MLC	£3,098	£3,209	
11	M3JP/KP 180 MLB	£4,030	£4,158	
15	M3JP/KP 200 MLA	£5,166	£5,360	
18.5	M3JP/KP 225 SMA	£6,177	£6,384	
18.5	M3JP/KP 200 MLB	£5,935	£6,129	HO
22	M3JP/KP 225 SMB	£7,202	£7,539	
30	M3JP/KP 250 SMA	£9,222	£9,671	
30	M3JP/KP 225 SMC	£8,678	£8,885	HO
37	M3JP/KP 280 SMA	£11,787	£12,157	
37	M3JP/KP 250 SMB	£10,425	£10,682	HO
45	M3JP/KP 280 SMB	£15,940	£16,514	
55	M3JP/KP 315 SMA	£18,118	£18,599	
55	M3JP/KP 280 SMC	£16,514	£16,838	HO
75	M3JP/KP 315 SMB	£22,766	£23,406	
90	M3JP/KP 315 SMC	£26,455	£27,095	
110	M3JP/KP 315 MLA	£30,782	£31,422	
132	M3JP/KP 355 SMA	£35,911	£36,873	
160	M3JP/KP 355 SMB	£43,124	£44,246	
200	M3JP/KP 355 SMC	£54,024	£54,988	
250	M3JP/KP 355 MLB	£73,903	£75,198	
315	M3JP/KP 400 LA	£85,123	£88,328	
315	M3JP/KP 400 LKA	£85,123	£88,328	
355	M3JP/KP 400 LB	£96,023	£99,548	
355	M3JP/KP 400 LKB	£96,023	£99,548	
400	M3JP/KP 400 LC	£99,507	£103,408	
400	M3JP/KP 400 LKC	£99,507	£103,408	

# Optional extras for low voltage AC motors

Please note, general performance motors have limited optional extras (see extras marked with\*).  
Select motor from our process performance range when additional extras are required.

R = On request  
S = Standard  
N = Not available

Option Description	Modification Code	Motor types	63 £	71 £	80 £	90 £	100 £	112 £	132 £	160 £	180 £	200 £	225 £	250 £	280 £	315 £	355 £	400 £
Auxilliary terminal box for accessories	418	●	N	N	N	N	N	N	N	343	343	343	343	343	343	343	343	343
	418	■	N	343	343	343	343	343	343	343	343	343	343	343	343	343	343	343
	418	▲	N	N	N	N	N	N	N	N	N	457	457	457	457	457	457	457
British Standard sliderails*		●	75	75	75	75	108	108	108	148	148	272	272	456	456	839	839	839
		■	N	75	75	75	108	108	108	148	148	272	272	456	456	839	839	839
		▲	N	N	75	75	108	108	108	148	148	272	272	456	456	839	839	839
Degree of Protection IP56*	403	●	232	232	232	232	232	289	289	331	331	331	331	331	331	363	383	441
	403	■	232	232	232	232	232	289	289	331	331	331	331	331	331	363	383	441
	403	▲	N	N	232	232	232	289	289	331	331	331	331	331	331	363	383	441
Degree of Protection IP65	158	●	232	232	232	232	232	294	294	375	375	375	375	375	330	363	383	441
	158	■	N	232	232	232	232	294	294	375	375	375	375	375	330	363	383	441
	158	▲	N	N	232	232	232	294	294	375	375	375	375	375	R	R	R	R
Exd motor for Gas Group IIC	461	▲	N	N	86	103	134	168	217	341	591	842	1095	1346	1961	3266	6528	9791
External earth bolt*	67	●	66	66	66	66	66	66	66	115	115	115	115	115	112	112	112	112
	67	■	N	100	100	100	100	100	100	115	115	115	115	115	112	112	112	112
	67	▲	N	N	S	S	S	S	S	S	S	S	S	S	S	S	S	S
Foot and face mounting*	8	●	122	122	122	122	122	159	159	N	N	N	N	N	N	N	N	N
	8	■	N	88	88	88	88	128	N	N	N	N	N	N	N	N	N	N
	8	▲	N	N	79	79	79	110	140	N	N	N	N	N	N	N	N	N
Foot and flange mounting*	9	●	122	122	122	122	122	159	159	303	303	402	402	440	379	656	1146	1472
	9	■	N	88	88	88	88	128	128	268	268	358	358	390	379	656	1146	1472
	9	▲	N	N	79	79	79	110	140	268	268	358	358	391	379	656	1146	1472
Frequency converter rating plate. Rating data according to quotation	163	●	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67
	163	■	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67
	163	▲	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67
Heating element specify 120V or 240V*	450/451	●	220	220	220	220	220	246	246	297	329	366	418	502	447	447	500	500
	450/451	■	N	220	220	220	220	246	246	297	329	366	418	502	447	447	500	500
	450/451	▲	N	N	220	220	220	246	246	297	329	366	418	502	447	447	500	500
Insulated bearing at NDE. Frame 280 and above on variable speed drives.*	701	●	R	R	R	R	R	R	R	R	R	R	R	R	1063	1063	1472	1472
	701	■	R	R	R	R	R	R	R	R	R	R	R	R	1063	1063	1472	1472
	701	▲	R	R	R	R	R	R	R	R	R	R	R	R	1063	1063	1472	1472
Metal fan	68	●	141	141	141	141	141	198	198	285	285	307	322	322	518	555	591	591
	68	■	N	136	136	136	136	196	196	253	253	270	285	285	518	555	591	591
	68	▲	N	N	134	159	159	168	168	253	253	270	285	285	518	555	591	591
Metal fan cover	53	●	94	94	94	94	94	131	129	S	S	S	S	S	S	S	S	S
	53	■	N	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S
	53	▲	N	N	S	S	S	S	S	S	S	S	S	S	S	S	S	S
Paint colour to standard RAL specify RAL no.*	114	●	202	202	202	202	202	198	198	242	242	242	242	242	235	235	235	235
	114	■	N	202	202	202	202	200	200	242	242	242	242	242	235	235	235	235
	114	▲	N	N	202	202	202	200	200	242	242	242	242	242	235	235	235	235
PT100 resistance element one per phase	445	●	N	N	N	N	N	598	598	587	587	869	869	869	819	819	819	819
	445	■	N	R	R	R	R	598	598	587	587	869	869	869	819	819	819	819
	445	▲	N	N	598	598	598	598	598	587	587	869	869	869	819	819	819	819
PTC thermistors 3 in series, 150°C others on request*	436	●	123	123	123	123	123	159	159	232	232	232	232	232	200	200	200	200
	436	■	N	123	123	123	123	159	159	232	232	232	232	232	200	200	200	200
	436	▲	N	N	123	123	123	159	159	232	232	232	232	232	200	200	200	200



# Optional extras for low voltage AC motors

Please note, general performance motors have limited optional extras (see extras marked with\*).  
Select motor from our process performance range when additional extras are required.

R = On request  
S = Standard  
N = Not available

Option Description	Modification Code	Motor types	63 £	71 £	80 £	90 £	100 £	112 £	132 £	160 £	180 £	200 £	225 £	250 £	280 £	315 £	355 £	400 £
Rain canopy for VI mounting (mandatory on Ex motors)*	5	●	104	104	104	104	104	119	119	136	157	165	221	273	329	388	579	579
	5	■	N	N	104	104	104	119	119	136	157	165	221	273	329	388	579	579
	5	▲	N	N	104	104	104	119	119	136	157	165	221	273	329	388	579	579
Restamping voltage, frequency and output, continuous duty*	2	●	48	48	48	48	48	48	48	48	48	48	48	48	48	48	48	48
	2	■	48	48	48	48	48	48	48	48	48	48	48	48	48	48	48	48
	2	▲	48	48	48	48	48	48	48	48	48	48	48	48	48	48	48	48
Roller bearing at DE (not available on IIC motors)*	37	●	N	N	N	N	N	N	N	242	278	316	364	402	346	346	506	R
	37	■	N	N	N	N	N	N	N	242	278	316	364	402	346	346	506	506
	37	▲	N	N	N	N	N	N	N	242	278	316	364	402	346	346	506	506
Separate (Fixed speed) motor cooling fan	183	●	N	360	360	360	360	874	874	1085	1236	1733	2037	2376	N	N	N	N
	183	■	N	R	R	R	952	1144	1427	1530	1530	1530	1800	2100	2272	2858	3103	3346
	183	▲	N	N	N	N	N	N	N	1951	2086	2822	2822	3123	3544	4129	4375	4620
SPM nipples	43	●	N	N	N	N	N	146	146	246	276	308	317	317	310	310	310	310
	43	■	N	N	N	N	N	N	N	246	276	308	317	317	310	310	S	S
	43	▲	N	N	N	N	N	N	N	246	276	308	317	317	310	310	S	S
Test - routine*	148	●	196	196	196	196	196	222	222	222	222	222	222	222	222	222	222	222
	148	■	N	196	196	196	196	222	222	222	222	222	222	222	222	222	222	222
	148	▲	N	N	196	196	196	222	222	222	222	222	222	222	222	222	222	222
Test - Type test report from test of an identical motor (where available)*	145	●	83	83	83	83	83	83	83	83	83	117	117	117	166	166	166	166
	145	■	N	83	83	83	83	83	83	83	83	117	117	117	166	166	166	166

Alloy ●  
Cast Iron ■  
Flameproof ▲


# High voltage process performance motors

ABB has developed a high voltage induction motor that can be offered with a short delivery time. The motor is ideal for the serial OEM who requires a standard product, the electrical and mechanical properties of which do not need to be altered.

The high voltage process performance motor utilises a combination of ABB high voltage motor design expertise and the proven platform of ABB low voltage cast iron motors.

The result is a motor with:

- a straightforward design
- significantly lower price than that of an engineered motor
- a standardised ordering process that ensures a short delivery time
- Shaft heights IEC 315 to 450
  - 110 kW to 750 kW at 50 Hz
  - 3 kV to 10 kV
- NEMA frames 506AT to 728
  - 150 hp to 950 hp (SF 1.15) at 60 Hz
  - 4 kV (star-connected stator), 2.3 kV (delta-connected stator)
- Rib-cooled cast iron frame (IP55 / IC411 / TEFC)
- 2 to 8 poles
- Horizontal foot mounted, horizontal foot and flange mounted and vertical flange mounted
- IEC, NEMA, CSA

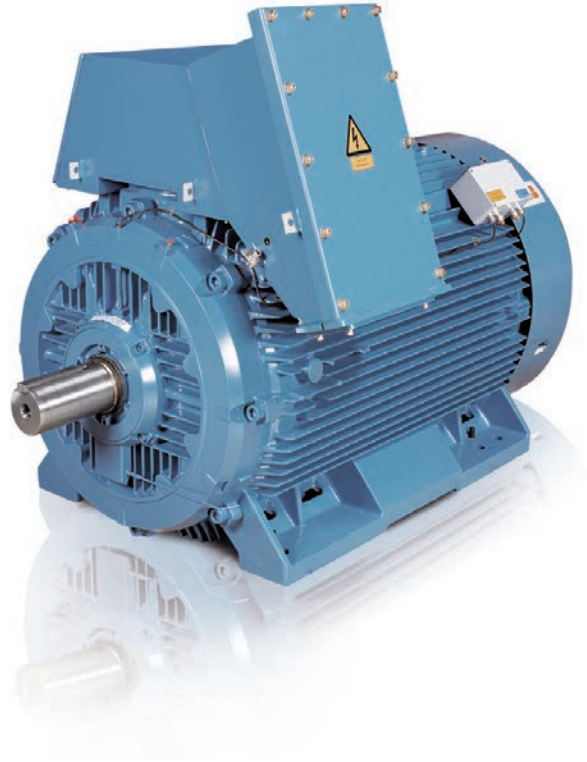

# HV process performance cast iron motors, 315-450, 2 & 4 poles

TEFC high voltage motors, cast iron frame, IP 55, IC411, single-speed, ambient temperature 40°C  
See product catalogues or [www.abb.com/motors&generators](http://www.abb.com/motors&generators) for more information on products.

Output kW	Type	Foot-mounted Product code	B3 Price
3000 r/min = 2 poles			
160	M3BM 315 LKA	3GBM 311811-ARA	£40,804
200	M3BM 355 LKA	3GBM 351811-ARA	£41,904
250	M3BM 355 LKB	3GBM 351821-ARA	£44,515
315	M3BM 355 LKC	3GBM 351831-ARA	£50,083
335	M3BM 355 LKD	3GBM 351841-ARA	£54,159
355	M3BM 400 LA	3GBM 401510-ARA	£57,482
400	M3BM 400 LB	3GBM 401520-ARA	£61,219
445	M3BM 400 LC	3GBM 401531-ARA	£64,538
500	M3BM 400 LKA	3GBM 401810-ARA	£67,322
560	M3BM 400 LKB	3GBM 401820-ARA	£71,083

3 kV, 6 kV, 6.6 kV and 10 kV options available on request.

Output kW	Type	Foot-mounted Product code	B3 Price	Vertical Product code	V1/B35 Price
1500 r/min = 4 poles					
132	M3BM 315 LKA	3GBM 312810-ARA	£38,216	3GBM 312810-BRA	£39,362
160	M3BM 315 LKB	3GBM 312820-ARA	£38,947	3GBM 312820-BRA	£40,093
200	M3BM 315 LKC	3GBM 312831-ARA	£40,801	3GBM 312831-BRA	£41,947
250	M3BM 355 LKA	3GBM 352810-ARA	£44,150	3GBM 352810-BRA	£45,615
315	M3BM 355 LKB	3GBM 352820-ARA	£47,495	3GBM 352820-BRA	£48,960
355	M3BM 355 LKC	3GBM 352830-ARA	£49,691	3GBM 352830-BRA	£51,156
400	M3BM 355 LKD	3GBM 352841-ARA	£52,671	3GBM 352841-BRA	£54,136
450	M3BM 400 LA	3GBM 402510-ARA	£55,990	3GBM 402510-BRA	£57,774
500	M3BM 400 LB	3GBM 402520-ARA	£60,093	3GBM 402520-BRA	£61,877
560	M3BM 400 LKA	3GBM 402810-ARA	£64,920	3GBM 402810-BRA	£66,704
630	M3BM 400 LKB	3GBM 402820-ARA	£71,837	3GBM 402820-BRA	£73,621
630	M3BM 450 LA	3GBM 452510-ARA	£71,837	3GBM 452510-BRA	£73,791
710	M3BM 450 LB	3GBM 452520-ARA	£81,631	3GBM 452520-BRA	£83,585

3 kV, 6 kV, 6.6 kV and 10 kV options available on request.

# HV process performance cast iron motors, 315-450, 6 & 8 poles

TEFC high voltage motors, cast iron frame, IP 55, IC411, single-speed, ambient temperature 40°C  
See product catalogues or [www.abb.com/motors&generators](http://www.abb.com/motors&generators) for more information on products

Output kW	Type	Foot-mounted Product code	B3 Price	Vertical Product code	V1/B35 Price
1000 r/min = 6 poles		3300V 50Hz			
112	M3BM 315 LKA	3GBM 313811-ARA	£43,150	3GBM 313811-BRA	£44,296
132	M3BM 315 LKB	3GBM 313820-ARA	£43,711	3GBM 313820-BRA	£44,857
150	M3BM 315 LKC	3GBM 313831-ARA	£44,246	3GBM 313831-BRA	£45,392
160	M3BM 355 LKA	3GBM 353810-ARA	£45,176	3GBM 353810-BRA	£46,641
200	M3BM 355 LKB	3GBM 353820-ARA	£47,422	3GBM 353820-BRA	£48,887
250	M3BM 355 LKC	3GBM 353830-ARA	£51,110	3GBM 353830-BRA	£52,575
315	M3BM 400 L	3GBM 403500-ARA	£60,385	3GBM 403500-BRA	£62,169
355	M3BM 400 LA	3GBM 403510-ARA	£62,635	3GBM 403510-BRA	£64,419
400	M3BM 400 LB	3GBM 403520-ARA	£66,688	3GBM 403520-BRA	£68,472
450	M3BM 400 LKA	3GBM 403811-ARA	£70,472	3GBM 403811-BRA	£72,256
500	M3BM 400 LKB	3GBM 403821-ARA	£73,990	3GBM 403821-BRA	£75,774
530	M3BM 400 LKC	3GBM 403831-ARA	£76,382	3GBM 403831-BRA	£78,166
560	M3BM 450 LA	3GBM 453510-ARA	£78,774	3GBM 453510-BRA	£80,728
630	M3BM 450 LB	3GBM 453520-ARA	£83,804	3GBM 453520-BRA	£85,757
710	M3BM 450 LC	3GBM 453530-ARA	£90,276	3GBM 453530-BRA	£92,229

3 kV, 6 kV, 6.6 kV and 10 kV options available on request.

Output kW	Type	Foot-mounted Product code	B3 Price	Vertical Product code	V1/B35 Price
750 r/min = 8 poles		3300V 50Hz			
200	M3BM 400 LA	3GBM 404510-ARA	£55,286	3GBM 404510-BRA	£57,070
220	M3BM 400 LB	3GBM 404520-ARA	£58,605	3GBM 404520-BRA	£60,389
250	M3BM 400 LC	3GBM 404530-ARA	£62,342	3GBM 404530-BRA	£64,126
280	M3BM 400 LD	3GBM 404540-ARA	£66,027	3GBM 404540-BRA	£67,811
300	M3BM 400 LE	3GBM 404550-ARA	£70,472	3GBM 404550-BRA	£72,256
315	M3BM 400 LKA	3GBM 404810-ARA	£72,987	3GBM 404810-BRA	£74,771
355	M3BM 400 LKB	3GBM 404820-ARA	£76,528	3GBM 404820-BRA	£78,312
375	M3BM 400 LKC	3GBM 404830-ARA	£78,678	3GBM 404830-BRA	£80,462
400	M3BM 450 LA	3GBM 454510-ARA	£81,316	3GBM 454510-BRA	£83,269
450	M3BM 450 LB	3GBM 454520-ARA	£85,638	3GBM 454520-BRA	£87,591
500	M3BM 450 LC	3GBM 454530-ARA	£89,518	3GBM 454530-BRA	£91,472
530	M3BM 450 LD	3GBM 454540-ARA	£91,937	3GBM 454540-BRA	£93,890

3 kV, 6 kV, 6.6 kV and 10 kV options available on request.



# Optional extras for high voltage motors

Note: certain variant codes cannot be used together  
Please see product catalogues for more variants.

R = On request

S = Standard

Code	Variant	315 Price	355 Price	400 Price	450 Price
<b>Bearings and lubrication</b>					
107	RTD Pt-100 in each bearing, 3-wire	£538	£538	£538	£538
037	Roller bearing at D-end, inc. 036 Transport lock (not available for 2-pole)	£1,076	£1,296	£1,296	£1,346
	SPM nipple (for shock pulse measuring) in each bearing	S	S	S	S
654	Provision for vibration sensors (M8 x 1 thread)	£1,342	£1,342	£1,342	£1,342
<b>Coupling</b>					
035	Assembly of customer supplied coupling-half	£2,638	£2,638	£2,638	£2,638
<b>Heating elements</b>					
450	Heating element 100-120V - 1ph	£439	£439	£439	£439
451	Heating element 200-240V - 1ph	£439	£439	£439	£439
<b>Packing / Seaworthy packing</b>					
	Seaworthy packing	£3,907	£3,907	£3,907	£3,907
<b>Painting</b>					
114	Special paint colour, customer specified RAL grade	£1,146	£1,146	£1,146	£1,146
<b>Protection</b>					
005	Metal protective roof (Rain Conopy), vertical motor, shaft down	£1,977	£1,977	£1,977	£1,977
158	Degree of protection IP65	£585	£585	£585	£585
403	Degree of protection IP56	£585	£585	£585	£585
<b>Rating &amp; instruction plates</b>					
002	Restamping output and voltage, continuous duty	£146	£146	£146	£146
<b>Stator winding temperature sensors</b>					
	RTD Pt-100 (6 pcs) inside stator slots, 3-wire	S	S	S	S
<b>Terminal box</b>					
447	Top mounted separate auxiliary terminal box for heating elements	£847	£847	£847	£847
750	Star point terminal box (not available for V1)	£1,734	£1,734	£1,734	£1,734
<b>Testing</b>					
	Routine test report	S	S	S	S
146	Type test with report for motor from specific delivery batch	£7,545	£7,545	£7,545	£7,545
147	Type test with report for motor from specific delivery batch, customer witnessed	£8,864	£8,864	£8,864	£8,864
762	Noise level test	£2,688	£2,688	£2,688	£2,688
<b>Foundation and installation</b>					
	Slide rails (2 pcs) for belt drives	£2,392	£2,392	£2,392	£2,392

# NEMA motors

## General purpose industrial motors

### Three phase, totally enclosed, foot mounted

- 1/8 – 400 hp
- NEMA 42 – 449T



## Applications

Pumps, compressors, fans, conveyors, machine tools and other general purpose three phase applications.

## Features

Suitable for mounting in any position. Ball bearings, heavy-gauge steel and cast-iron frames, and gasketed conduit boxes. Class F insulation, 1.15 service factor, low-loss electrical grade lamination steel. EM Super-E® motors have NEMA Premium® efficiency and 3 year warranty. Motors with TR suffix have roller bearings for heavy belted loads.

## Severe duty motors

### Three phase, totally enclosed, foot mounted

- 1 – 400 hp
- NEMA 143T – 449T



## Applications

Petrochemical plants, mines, foundries, pulp and paper plants, waste management facilities, chemical plants, tropical climates and other processing industry applications requiring protection against corrosion caused by severe environmental operating conditions.

## Features

ECP motors are XEX designs. 1.15 service factor, corrosion resistant epoxy finish, regreasable ball or roller bearings, oversized rotatable cast iron conduit box, cast iron frames, V-ring shaft seal, moisture resistant copper windings. Class F insulation, stainless steel nameplate and corrosion resistant hardware. ECP/XEX Super-E® motors have NEMA Premium® efficiency and 3 years warranty. Positive lubrication system (PLS) on 360 frames and larger.

## Explosion proof motors

### Single and three phase, foot mounted

- 1/4 – 300 hp
- NEMA 48 – 449T



## Applications

Ideal for use where hazardous fumes or dust may be present.

## Features

U.L. and CSA approved for Division 1, Class I, Group D; Class I, Group D, Class II Group F & G; Class I, Group C & D, Class II, Group F & G. Corrosion resistant epoxy finish. Shipped with U.L. and CSA approved cast conduit box assembled to each motor. 1.00 service factor. EM Super-E® explosion proof motors have NEMA Premium® efficiency and 3 years warranty.

# A quick guide to supply voltages and frequencies worldwide

Country	Frequency Hz	Industrial Voltage in common use (V)
AFRICA		
Algeria	50	415/230, 380/220
Angola	50	380/220
Botswana	50	400/230
Burkina Faso	50	380/220
Burundi	50	380/220
Cameron	50	380/220
Central African Rep	50	380/220
Chad	50	380/220
Congo Rep.	50	380/220
Congo Dem. Rep.	50	380/220
Egypt	50	380/220
Ethiopia	50	380/220
Gambia	50	400/230
Ghana	50	415/240, 400/230
Guinea	50	440/220, 380/220
Guinea-Bissau	50	220/110
Ivory Coast	50	380/220
Kenya	50	415/240, 380/220
Lesotho	50	380/220
Libya	50	400/230
Malawi	50	400/230, 380/220
Morocco	50	400/230, 380/220
Mozambique	50	380/220
Namibia	50	220
Nigeria	50	415/240, 380/220
Rwanda	50	400/230
Senegal	50	400/230
Sierra Leone	50	400/230
South Africa*	50	500, 400/230, 380/220
Sudan	50	400/230
Tanzania	50	400/230
Tunisia	50	400/230
Uganda	50	415/240
Zaire	50	415, 380/220
Zambia	50	400/230
Zimbabwe	50	400/230

Country	Frequency Hz	Industrial Voltage in common use (V)
MIDDLE EAST		
Bahrain	50	400/230, 380/220
Iraq	50	400/230
Israel	50	415, 400/230, 280/220
Jordan	50	400/230, 380/220
Kuwait	50	415/240
Lebanon	50	380/220
Oman	50	415/240
Qatar	50	415/240
Saudi Arabia	50, 60	440/220, 400/230, 380/220
Syria	50	380/220
United Arab Emirates	50	415/220
ASIA		
Afghanistan	50	380/220
Armenia	50	380/220
Azerbaijan	50	380/220
Bangladesh	50	380/220
Bhutan	50	400/230
Cambodia	50	380/220
China*	50	380/220
Hong Kong	50	380/220
India*	50	415/240, 400/230
Indonesia	50	380/220
Iran	50	400/230, 380/220
Japan	50, 60	440/220, 400/200
Kazakhstan	50	380/220
Korea North	60	380/220
Korea South	60	440, 380/220
Laos	50	380/220
Malaysia	50	415/240
Myanmar (Burma)	50	400/230
Nepal	50	400/230
Pakistan	50	415/240, 400/230
Philippines	60	440, 220/110
Singapore	50	415/240
Sri Lanka	50	400/230, 380/220
Taiwan R.O.C.	60	440, 380/220
Thailand	50	380/220
Vietnam	50	380/220

# A quick guide to supply voltages and frequencies worldwide

Country	Frequency Hz	Industrial Voltage in common use (V)
OCEANIA		
Australia	50	415/240
Fiji	50	415/240
New Zealand	50	415/240, 400/230
NORTH AMERICA		
Canada	60	600, 575, 460/230
USA	60	460/230
CENTRAL & SOUTH AMERICA		
Antigua	60	480, 460, 440, 230, 230/460, 220
Argentina	50	660, 380, 220
Aruba	60	480, 460, 440, 230, 230/460, 220
Bahamas	60	480, 460, 440, 230, 230/460, 220
Barbados	50	480, 460, 440, 230, 230/460, 220
Belize	60	480, 440, 240, 220
Bermuda	60	480, 460, 440, 230, 230/460, 220
Bolivia	50	480, 440, 220/380
Brazil	60	690, 480, 460, 440, 380/660, 220/380/440, 280/380
Chile	50	690, 575, 460, 380/660, 380/220
Colombia	60	230/480, 230/460, 220/440, 110/220
Costa Rica	60	480, 440, 240, 220
Cuba	60	480, 460, 440, 230, 230/460, 220
Ecuador	60	660, 480, 460, 220/440
El Salvador	60	480, 440, 240, 220
Guatemala	60	480, 440, 240, 220
Guyana	60	480, 460, 440, 230, 230/460, 220
Haiti	60	480, 460, 440, 230, 230/460, 220
Honduras	60	480, 440, 240, 220
Jamaica	60	480, 460, 440, 230, 230/460, 220
Mexico	60	440/220
Nicaragua	60	480, 440, 240, 220
Panama	60	480, 440, 240, 220
Paraguay	50	660, 380, 220
Peru	60	690, 480, 460, 440, 380, 220, 220/440
Uruguay	50	500, 380/690, 220/380
Venezuela	60	480, 460, 440, 230, 230/460, 220

Country	Frequency Hz	Industrial Voltage in common use (V)
EUROPE		
Andorra	50	400/230, 380/220
Austria	50	690, 400/230
Belarus	50	380/220
Belgium	50	400/230
Bosnia-Herzegovina	50	380/220
Bulgaria	50	380/220
Cyprus	50	415/240, 400/230
Croatia	50	400/230, 380/220
Czech Rep	50	690, 400/230, 380/220
Denmark	50	400/230
Estonia*	50	380/220
Finland*	50	690, 500, 400/230
France	50	400/230, 380/220
Germany	50	690, 400/230
Greece	50	400/230, 380/220
Hungary	50	400/230, 380/220
Iceland	50	400/230, 380/220
Ireland	50	400/230, 380/220
Italy*	50	400/230, 380/220
Latvia	50	380/220
Liechtenstein	50	400/230
Lithuania	50	380/220
Luxembourg	50	400/230, 380/220
Macedonia	50	220
Malta	50	415/240
Monaco	50	400/230, 380/220
Montenegro	50	400-690
Netherlands	50	500, 400/230
Norway	50	690, 500, 400/230
Poland	50	400/230, 380/220
Portugal	50	400/230, 380/220
Romania	50	400/230, 380/220
Russia*	50	380/220
Serbia	50	380
Slovakia	50	400/230, 380/220
Slovenia	50	400/230, 380/220
Spain*	50	400/230, 380/220
Sweden*	50	690, 500, 400/230
Switzerland	50	690, 500, 400/230
Turkey	50	230/400
Ukraine	50	380/220
United Kingdom	50	690, 415/240, 400/230, 380/220

\*Manufacturing sites

# Useful engineering information

## Reference information and explanation of abbreviations

### Degrees of protection

As defined by IEC 34-5 and BS 4999 pt 105, the code generally consists of 'IP' followed by two digits: the first describing the protection against solid bodies or protection to persons against contact with live or moving parts inside the enclosure; the second describing the protection against ingress of water.

First Digit	Meaning (Protection Against)	Second Digit	Meaning (Protection Against)
0	Not protected	0	Not protected
1	50mm dia. body	1	Vertical drips
2	12mm dia. body	2	Drips up to 15° from vertical
3	2.5mm dia. body	3	Drips up to 60° from vertical
4	1mm dia. body	4	Splashing from any direction
5	Dust protected	5	Water jets from any direction
6	Dust tight	6	Heavy seas (Does not cover corrosion resistance, etc)
		7	Effects of immersion

### Cooling forms

As defined by IEC 34-6 and BS 4999 pt.106, the code generally consists of 'IC' followed by two digits; the first describing the cooling circuit arrangement; the second describing the method of supplying power to circulate the coolant. Where more than one cooling circuit is in use, these may be expressed as 'IC' followed by groups of two digits, e.g. IC0141.

The following forms are used in this catalogue:

- IC410 – Typical examples are roller table motors
- IC411 – Standard motors
- IC416 – Standard motors (normally bigger frame sizes only equipped with auxilliary fan)
- IC418 – Fan application motors without a cooling fan, cooled by the air stream of the driven machine
- IC01 – Open drip-proof motors
- IC31W – Water cooled motors

### Mounting forms

The arrangements are defined by IEC 34-7, BS 4999 pt. 107 code II (and DIN 42950). The following forms are used in this catalogue and are for motors with two bearings housed in end-shields. When flange mounting they have access to the back of the flange.

- IM1001 (B3) Horizontal foot mounted
- IM1011 (V5) Vertical foot mounted
- IM3001 (B5) Horizontal flange mounted
- IM3011 (V1) Vertical flange mounted
- IM2001 (B35) Horizontal foot & flange mounted
- IM1071 (B8) Horizontal foot, ceiling mounted

### Note for gearbox users – service factor

The geared motors covered by this catalogue are rated for driven machines with a uniform load for continuous duty or occasional moderate shock loading on single-shift operation, being known as a Unity Service Factor. For applications with short-time duty, high inertia or heavy shock loads, advice should be sought on calculating the correct service factor and selecting the most suitable gearbox type.

### Abbreviations

Electrical data	
Kilowatt	= kW
Volts	= V
Armature Volts	= $V_a$
Field Volts	= $V_f$
Amperes	= A
Armature Current	= $I_a$
Field Current	= $I_f$
Power factor	= PF

### Useful conversion factors

1hp	= 746W
1Nm	= 8.851 lb.in
1mm	= 0.03937inch
1m <sup>2</sup>	= 10.765ft <sup>2</sup>
1kg.m <sup>2</sup>	= 1Nms <sup>2</sup> = 0.73752 lb.ft <sup>2</sup>

### Useful formulae

1 Watt	= 1 Nm/s
Torque (lb ft)	= $\frac{5250 \times \text{hp}}{\text{speed (rpm)}}$
Torque (Nm)	= $\frac{9550 \times \text{kW}}{\text{speed (rpm)}}$
3 phase AC power (kW)	= $\frac{1.732 \times V \times I \times \text{PF}}{1000}$
1 phase AC power (kW)	= $\frac{V \times I \times \text{PF}}{1000}$



# Choosing the right drive for your application

Step	Process	Action
<b>1</b>	<b>Identify the application</b> Identify the type of application and the likely demands of the drive	Continue to step 2. 
<b>2</b>	<b>Gather the load data: system inertia, required acceleration and deceleration rates, minimum and maximum speeds, overload requirements, etc.</b> This information can often be determined by the performance of the existing motor	Continue to step 3. 
<b>3</b>	<b>Gather the motor data: rated torque, kW, volts insulation class, speed, etc.</b> Whether an existing motor or a new motor is being used, the motor information is critical to choosing a drive	Continue to step 4. 
<b>4</b>	<b>Choose a drive</b> Match the data gathered in steps 1 to 3 against the table of drive features in the feature finder page xx. Select a drive that meets the motor requirements and has all the software features needed for the application	Continue to step 5. 
<b>5</b>	<b>Is the drive offered in the correct kW/amp rating?</b> The drive you choose must be able to supply the necessary current to the motor to produce the torque required. This includes normal and overload conditions. Select current from the tables within this catalogue	If yes, continue to step 6. If no, go to step 4.  or 
<b>6</b>	<b>Is the drive offered in the correct enclosure and environmental ratings?</b> The drive you choose must be available in an enclosure style that will withstand the application's environment. It also must produce the required current at the application's altitude and ambient temperature	If yes, continue to step 7. If no, go to step 4.  or 
<b>7</b>	<b>Does this drive have the features needed to meet the application's demands?</b> The drive you choose must have a feature set that matches the application. It also must have sufficient hardware (inputs and outputs, feedback, communications etc.) to perform the application	If yes, continue to step 8. If no, go to step 4.  or 
<b>8</b>	<b>Does this drive have the motor control performance to meet the application's demands?</b> The drive you choose must be able to produce the needed torque at the necessary speeds. It must also be able to control speed and torque depending on the application requirements	If yes, continue to step 9. If no, go to step 4.  or 
<b>9</b>	<b>Does the drive have the right user interface?</b> The drive you choose must interface with the customer correctly, do you need a simple keypad, no keypad or a full text assistant keypad?	If yes, continue to step 10. If no, go to step 4.  or 
<b>10</b>	<b>Does the drive have the right level of safety?</b> The drive you choose could be responsible for the safety in your system after changes in the machinery directive, some ABB drives contain built in safety functionality	If yes, continue to step 11. If no, go to step 4.  or 
<b>11</b>	<b>Congratulations!</b> The ABB AC drive you have chosen has the features and performance needed for a successful application	

Please do not hesitate to call ABB if you require assistance selecting your drive and motor







# Contact us

## **ABB Limited**

Daresbury Park

Daresbury

Warrington

Cheshire

WA4 4BT

Tel: +44 (0) 1925 741 111

Fax: +44 (0) 1925 741 212

**[www.abb.co.uk/energy](http://www.abb.co.uk/energy)**

## **Notes:**

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein.

Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB.

Copyright© 2013 ABB

All rights reserved

Printed in UK (04.2013)